

KWT® 金瓦特光电

KINGWATT OPTO-ELECTRONICS

**Professional
Super-excellent
Commercial**

LED Lighting Manufacturer

专注高端LED商业照明灯具制造商

2019/05

KWT®

深圳市金瓦特光电有限公司

深圳公司地址:

深圳市石岩街道塘头一号路创维创新谷2A栋1203

邮编: 518108

东莞公司地址:

东莞市桥头镇友联路兴濠城科技创新园B栋

邮编: 523539

电话: +86-755-86062213 手机: +86 138-0988-5903 传真: +86-755-86062219

邮箱: kw@kwtled.com 网站: www.kwtled.com

SHENZHEN KING WATT OPTO-ELECTRONICS CO.,LTD

Shenzhen company address:

Room 1203, Building 2#A, Skyworth Innovation Valley,

Songbai Road, Shiyan, Bao'an District, Shenzhen, China 518108

Dongguan company address:

Building B, XingHaoCheng high-tech Park, Youlian road, QiaoTou town,

DongGuan city, China 523539

Tel: +86-755-86062259 Mobile: +86 134-2432-7320 Fax: +86-755-86062219

E-mail: info@kwtled.com Web: www.kwtled.com



ENTERPRISE CULTURE

企业文化

Enterprise Mission

Design and manufacture perfect LED lamps
to improve human being's environment

企业使命

设计生产完美产品，改善人类生存环境

Enterprise Forecast

To be a leading LED commercial lighting enterprise
satisfying customers' demand in market orientation

公司愿景

成为客户满意、行业尊敬、
员工幸福的集团化企业

Core Value

Customer first, sincerity, responsibility and innovation

核心价值

客户至上、诚信负责、精益求精
协作创新、实现自我、拼搏感恩

Enterprise Spirit

Confidence, teamwork, responsibility and tolerance

企业精神

自信、互助、责任、大度

Business Philosophy

Honesty, practice and efficiency

经营理念

诚信做人、务实做事
团结拼搏、高效创优

Strategy Core

Quality First, Innovation and Breakthrough

核心战略

品质至上、创新突破

Customer Service Philosophy

To be customers' reliable partne

客户服务理念

成为客户最信赖的合作伙伴

NO QUALITY CONTROL AND CREDIT
NO BRIGHT FUTURE



KWT[®]

深圳市金瓦特光电有限公司成立于2011年1月，坐落于中国最大的LED技术研发及制造中心—深圳，为国家级高新技术企业，是专业研发、生产及销售LED灯具、智能控制系统、物联网智能软硬件等产品并提供系统解决方案的知名企业。

公司核心研发团队来自于中科院深圳先进技术研究院，2011年10月与深圳先进技术研究院联合设立LED科技成果孵化中心，涉及LED项目，双方共同研发，企业承接转化研发成果。历年来，金瓦特在LED领域和智能物联网领域取得长足发展，自有专利近200项，产品及照明方案被广泛的应用在国内外机场、火车站、博物馆、图书馆、政府机关、高校等场所，高端的品质及优异的照明体验赢得了用户的广泛称赞。

公司产品出口遍及欧美、澳洲及日韩等世界各地，法国里昂机场，雅加达机场，新加坡机场，巴林中央火车站，迪拜帆船酒店大堂，汉堡铂尔曼酒店大堂，迪拜家乐福购物中心，TESCO连锁超市，Orange连锁店，巴黎奔驰，宝马4S店等高端照明场所。



King watt is a lighting manufacturer specialized in LED Downlights, track lights, Surfacemounted, recessed Lights, Magnet lights, Linear lights, professional education lights, outdoor flood lights, highbay Lights, Street lights & drivers, smart controllers etc. We own advanced facilities in production and testing. Such as automatically aging equipments, High Temperature test machine, salty test machine, IES test machine, integratigg shpere, label laser. King watt focus on high quality productions since 2006, we design, producing and sell our own patent products to oversea countries. mainly for Europe, Australia and part of Asia. Our production widely use in Shopping malls, offices, hotels, resturants, hospitals, schools etc. King Watt as an experienced manufacturer in lighting industry, we are trusted by all customers from all oversea countries.

KWT warmly welcome your enquiry and cooperation!

Enterprise advantage 企业优势

- 1、中科院的技术背景，LED行业顶尖专家全方位技术支持；
- 2、对灯的深入理解。优异的结构设计不仅能使灯具长寿命、低光衰，确保用户安装方便快捷，灯具与建筑风格的完美融合更是为建筑锦上添花；
- 3、对光色与人体视力健康的深入研究。灯具是载体，健康舒适的灯光和色彩才是核心，从健康角度讲，光色比灯更重要，2014年6月，深圳金瓦特携手深圳先进技术研究院与中国标准化研究院合作进行视觉健康研究；
- 4、可提供整套灯光解决方案和控制系统方案，出色的照明方案和科学的控制系统方案，可以让客户获得高品质的光环境和超值的光愉悦感；
- 5、丰富的品质管控和施工经验，近10年的灯具制造和众多的大型照明工程实施，使企业积累了丰富的产品管控和施工管理经验。

Company Exhibition 公司展示

1. Receptionst 前台
2. Office area 办公区域
3. Item display 展厅
4. Conference hall 会议室
5. Production workshop 生产车间
6. SMD patch workshop SMD组装车间




Partners 合作伙伴



Research & Development 研发工程

1. Structure design 结构设计
2. Integrating sphere 积分球测试
3. Quality monitoring equipment 质量检测设备
4. Goniophotometers 暗房

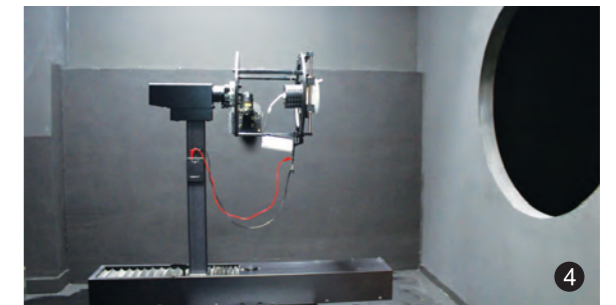

Colors for selection 灯体颜色



All the products, included shape, construction, function are registered in national patent.
所有产品，包含外形，结构，功能都注册了国家专利。



Certification 证书

1. National High - tech Enterprise Certificate 国家高新技术企业证书
2. Certificate of registration by ISO9001:2008 注册认证ISO9001:2008
3. Standards Association of Australian SAA认证
4. CB Certificate CB认证
5. GS Certificate GS认证
6. CE Certificate CE认证
7. China Compulsory Certification CCC认证



1




2



3



4



5



6



7



7

IP20

Liquids, second digit 液体, 第二位

solids, first digit 固体, 第一位

SOLIDS, FIRST DIGIT 固体, 首位数

- Level Protection
- IP0X No protection
 - IP1X Protect against solid bodies of dimensions > 50mm
 - IP2X Protect against solid bodies of dimensions > 12mm
 - IP3X Protect against solid bodies of dimensions > 2.5mm
 - IP4X Protect against solid bodies of dimensions > 1.0mm
 - IP5X Protect against the dust (ingress of dust is not entirely prevented)
 - IP6X Completely protect against the dust (no ingress of dust)

LIQUIDS, SECOND DIGIT 液态, IP20第二位表示的意思

- level protection
- IPX0 No protection
 - IPX1 protect against dripping water
 - IPX2 protect against dripping water when tilted up to 15°
 - IPX3 protect against dripping water when tilted up to 60°
 - IPX4 protect against spraying water (any direction)
 - IPX5 protect against water jets (any direction)
 - IPX6 protect against powerful water jets (water projected in powerful jets against the enclosure from any direction shall have no harmful effects)
 - IPX7 protect against effect of temporary immersion in water (ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time)
 - IPX8 protect against effect of continuous immersion in water (ingress of water in harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time)

CIRCUMSTANCE ILLUMINATION SUGGESTION 环境照度建议

Illumination Range (lx)	circumstance genre
20-30-50	low visual requirements: corridor, storage room, stairway, bathroom, advertising board, etc
30-110-150	circulation places: dining room, bedroom, elevators, duty room, game room, station hall, etc
100-150-200	continuous workplaces: reception room, store shelves, counters, kitchen, etc
200-300-500	simple visual requirements: reading room, playroom, showroom, general venues, etc
300-500-700	secondary visual requirements: match field, general factory, office, etc
500-750-1000	strong visual requirements: metal processing plants, small unit assembly workshop, electrical workshop, polishing workshop, etc
750-1000-1500	more difficult to visual requirements
1000-1500-200	special visual requirements
Above 2000	high precise visual operations

CONTENTS


STARWOOD DOWNLIGHTS 喜达屋筒灯



RC-F Series
P23



RC-G Series
P25




SC-F Series
P27




SC-G Series
P29




TR-F Series
P31



TR-G Series
P33



TS-F Series
P35



TS-G Series
P37

RECESSED DOWNLIGHTS 嵌装筒灯



DLC04 Series
P41



DLC05 Series
P45



DLC06 Series
P49



DLC08 Series
P53



DLC10 Series
P57



DLD04 Series
P65



DLD06 Series
P71




DLD08 Series
P77



DLE06 Series
P85



DLG Series
P89



DLG Series
P91



DLT02 Series
P95



DLT03/05/06 Series
P97



DLT08 Series
P99



RC40 Series
P103



RC60 Series
P105



RCE Series
P109



DLS Series
P111




DLW Series
P113



DWW Series
P115

CONTENTS

GRILLE LIGHTS 格栅灯




SD04 Series
P117



AR02-A Series
P121



AR02-B Series
P123



AR02-1 Series
P125



AR02-2 Series
P127



AR02-3 Series
P129



AR02-4 Series
P131



GLS/M/L01 Series
P135



GLS/M/L02 Series
P137



GLS/M/L03 Series
P139



TRS/M/L01 Series
P141



TRS/M/L02 Series
P143

PULL-OUT DOWNLIGHTS 抽拉式筒灯



PORC73 Series
P147



PORM62 Series
P149



POR98 Series
P151



POS100 Series
P153



POD100 Series
P155



POT100 Series
P157



POR130 Series
P159



POS130 Series
P161



POD130 Series
P163



POT130 Series
P165

TRACK LIGHTS 轨道灯



RT80 Series
P169



RT80P Series
P171



RT95 Series
P175



RT95P Series
P177

CONTENTS



RT95N Series
P179



RT95NP Series
P181



RT55 Series
P187



RT76 Series
P191



RT105-A Series
P193



RT105-B Series
P195



RT69 Series
P199



RT90 Series
P201



RT100 Series
P203



RT85AD Series
P207



RT85BD Series
P209



RT85AL Series
P211



RT85BL Series
P213



LT100-A Series
P217



LT100-B Series
P219



RC80 Series
P223



RC95 Series
P225



RC105 Series
P227



RC69 Series
P229



RC90 Series
P231



RC100 Series
P233



LM100 Series
P237



RM70 Series
P239



RM95 Series
P241



SMS Series
P245



SMR Series
P247



RP55 Series
P251

CEILING RECESSED SPOT LIGHTS 嵌入式射灯


SURFACE-MOUNTED SPOT LIGHTS 明装射灯

SURFACE-MOUNTED DOWNLIGHTS 明装筒灯


SUSPENDED LIGHTS 吊灯

CONTENTS

MAGNETIC LIGHTS 磁吸灯



TARCK Series
P255




MLL Series
P257



MLS Series
P258



MW Series
P259



MGL Series
P260



MGS Series
P261



MS54 Series
P262



MS76 Series
P263



MS112 Series
P264



MS55 Series
P265



MP55 Series
P266



L4368 Series
P269



L4368 Series
P271



L4368 Series
P273



L4368 Series
P275



L4368 Series
P277



L4368 Series
P279



LTD Series
P283



LTC Series
P285



LTG Series
P287



LTR Series
P289

LINEAR LIGHTS 线型灯

STARWOOD DOWMLIGHT SERIES



喜达屋筒灯系列

Model.型号

Power.功率

RC75	7W/11W
RC105	15W
RC125	24W
RC150	34W
SC75	7W/11W
SC105	15W
SC125	24W
TR75	7W/11W
TR105	15W
TR125	24W
TR150	34W
TS75	7W/11W
TS105	15W
TS125	24W














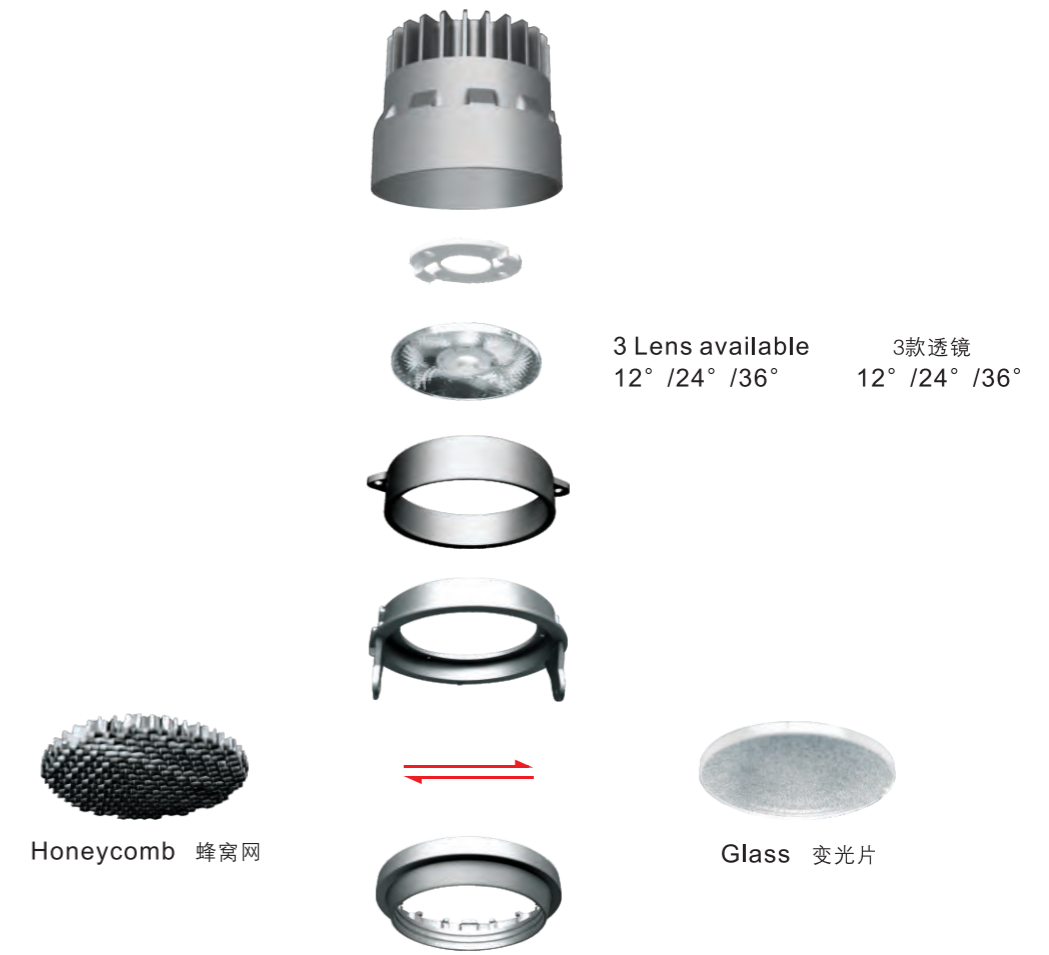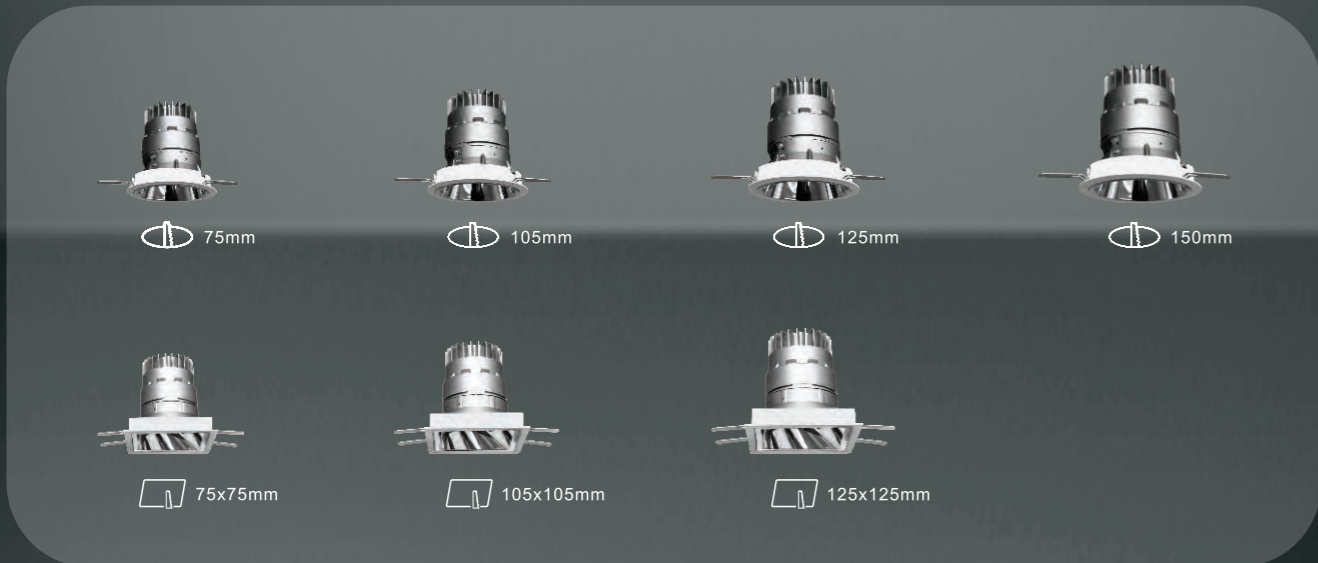




Fixed 下照式

Adjustable 可调式



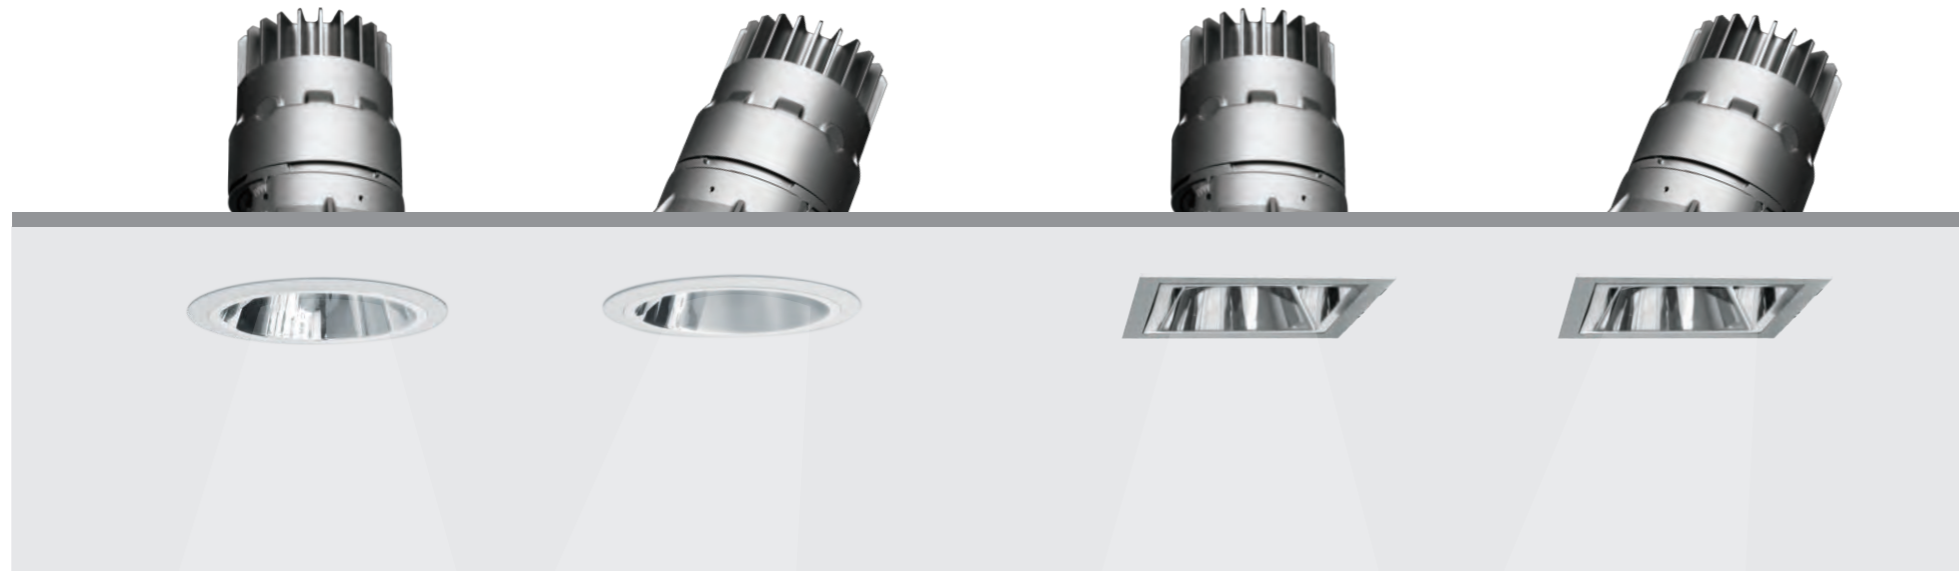

34W 3000K CRI:90

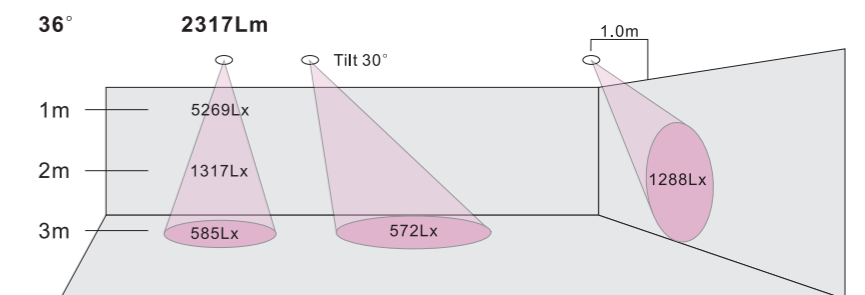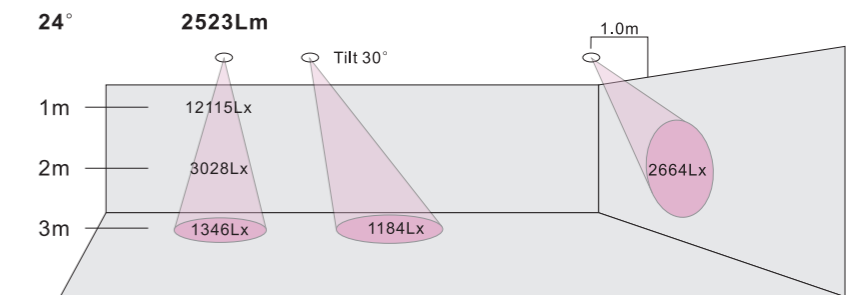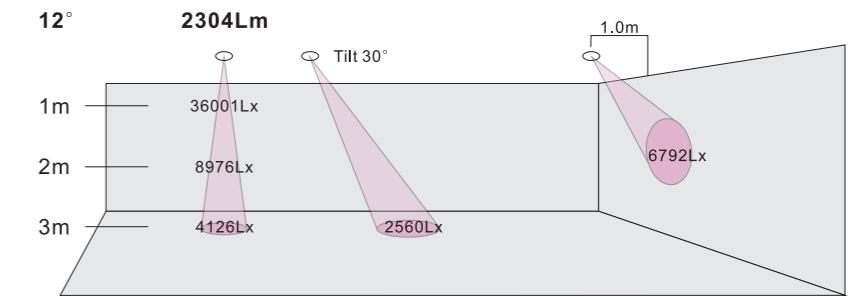

Starwood Downlight Series 喜达屋筒灯系列

	Fixed 不可调式					Adjustable 可调式														
Picture 图片																				
Cutout diameter (mm) 开孔尺寸	φ 75	φ 105	φ 125	φ 150		75x75	105x105	125x125			φ 75	φ 105	φ 125	φ 150		75x75	105x105	125x125		
Trim diameter (mm) 外部直径	φ 90	φ 120	φ 140	φ 165		90x90	120x120	140x140			φ 90	φ 120	φ 140	φ 165		90x90	120x120	140x140		
Height (mm) 高度	H:101	H:120	H:139	H:158		H:101	H:120	H:139			H:106	H:125	H:147	H:167		H:106	H:125	H:147		
Wattage and Luminous flux 功率与光通量	Standard 7W 550lm	Standard 11W 630lm	Standard 15W 1080lm	Standard 24W 2040lm	Standard 34W 2440lm	Standard 7W 550lm	Standard 11W 630lm	Standard 15W 1080lm	Standard 24W 2040lm		Standard 7W 550lm	Standard 11W 630lm	Standard 15W 1080lm	Standard 24W 2040lm	Standard 34W 2440lm	Standard 7W 550lm	Standard 11W 630lm	Standard 15W 1080lm	Standard 24W 2040lm	
Beamangle 光束角	12° /24° /36°					12° /24° /36°					12° /24° /36°					12° /24° /36°				
LED Driver 电源	Standard ON-OFF Triac dim		Option 1-10v dim Dali dim			Standard ON-OFF Triac dim		Option 1-10v dim Dali dim			Standard ON-OFF Triac dim		Option 1-10v dim Dali dim			Standard ON-OFF Triac dim		Option 1-10v dim Dali dim		

Advantages 产品优势

- High quality CITIZEN COB, CRI>90, SDCM<3
- Anti-glare design with various free replacement accessories
- Triac, 0-10V and DALI dimming are available
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Long life, >50,000 hours, 5 years warranty

- 高亮度面铁城光源，显指大于90，低色容差SDCM小于3
- 防眩光设计，多种配件自由替换
- 可选配可控硅调光，0-10V调光和DALI调光
- 模组化结构，更易组装，安装拆卸，不损坏天花板
- 组合结构外观设计，符合一致的美学要求
- 寿命长，超过50000小时，质保5年



Suitable for all size
(适用于所有尺寸)

Only for cut out ϕ 75mm, 105mm
(仅用于开孔尺寸 ϕ 75mm, 105mm)



CITIZEN COB

SDCM <3



7W/11W/15W/24W/34W

CRI >90



AC100-240/220-240V 50/60Hz

12° / 24° / 36°



ϕ 75 / ϕ 105 / ϕ 125 / ϕ 150mm

5 YEAR 5 Years Warranty
5年质保


Starwood Downlight Series

Starwood downlight series were designed by well-known lighting designers according to the deep anti-glare lighting performance and application which could achieve UGR<10. Modular design, quickly assemble and disassemble. Front maintenance. Different reflector shapes for options. The shape for fittings include Round, Square, Fixed, Gimbal, Trimless. They are widely used in high-end hotels, villas, clubs, cinemas, offices, restaurants etc.


喜达屋筒灯系列是在深入研究酒店照明需求，集合了数十家国内外知名照明设计公司总监的设计理念后集大智而成，模组化结构设计，拆卸组合方便快捷；深度防眩黑光设计，众多反光罩搭配，光色柔和，见光不见灯；四款大小不同尺寸，方形圆形齐全，带边框无边框兼有，有下照式、洗墙式，防水等级IP44，产品可广泛的使用于高端酒店、别墅、会所、影院、办公室。



Dimensions 产品尺寸 (Unit: mm)

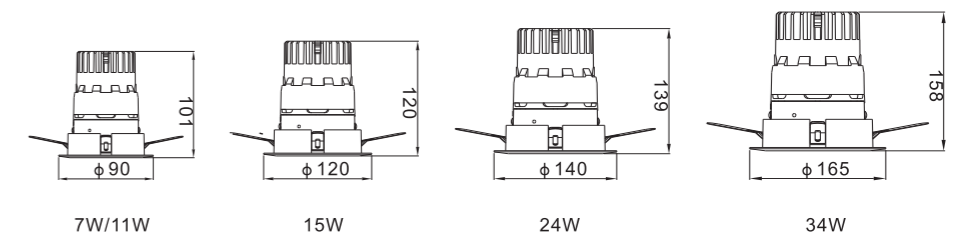

Photometric Diagram 光度分布图

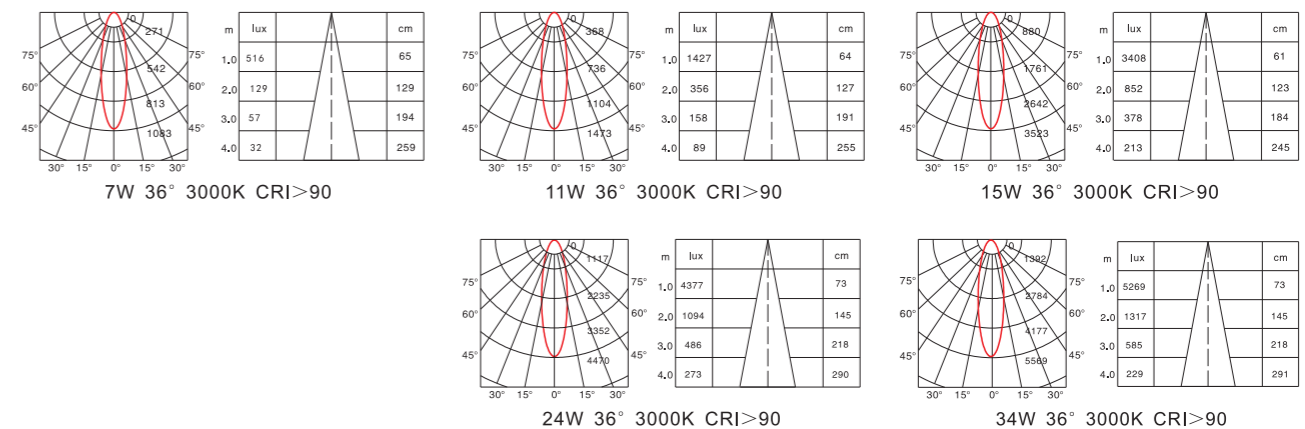

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC7507F-927XY	7W	180mA	2700K	12° 340lm/24° 352lm/36° 419lm	>90	≥0.95
RC7507F-930XY			3000K	12° 356lm/24° 516lm/36° 550lm		
RC7507F-940XY			4000K	12° 377lm/24° 543lm/36° 565lm		
RC7511F-927XY	11W	300mA	2700K	12° 550lm/24° 642lm/36° 566lm	>90	≥0.95
RC7511F-930XY			3000K	12° 580lm/24° 670lm/36° 621lm		
RC7511F-940XY			4000K	12° 620lm/24° 752lm/36° 667lm		
RC10515F-927XY	15W	400mA	2700K	12° 1054lm/24° 1058lm/36° 1250lm	>90	≥0.95
RC10515F-930XY			3000K	12° 1053lm/24° 1117lm/36° 1367lm		
RC10515F-940XY			4000K	12° 1218lm/24° 1275lm/36° 1440lm		
RC12524F-927XY	24W	560mA	2700K	12° 1655lm/24° 2019lm/36° 1754lm	>90	≥0.95
RC12524F-930XY			3000K	12° 1748lm/24° 2109lm/36° 1862lm		
RC12524F-940XY			4000K	12° 1874lm/24° 2353lm/36° 1990lm		
RC15034F-927XY	34W	820mA	2700K	12° 2145lm/24° 2388lm/36° 2208lm	>90	≥0.95
RC15034F-930XY			3000K	12° 2304lm/24° 2823lm/36° 2274lm		
RC15034F-940XY			4000K	12° 2542lm/24° 3009lm/36° 2810lm		

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality CITIZEN COB, CRI>90, SDCM<3
- Anti-glare design with various free replacement accessories
- Triac, 0-10V and DALI dimming are available
- Universally adjustable, 0-30° in vertical, and 360° in horizontal
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Long life, >50,000 hours, 5 years warranty

- 高亮度西铁城光源，显指大于90，低色容差SDCM小于3
- 防眩光设计，多种配件自由替换
- 可选配可控硅调光，0-10V调光和DALI调光
- 垂直转动0-30°，水平360°转动
- 模块化结构，更易组装，安装拆卸，不损坏天花板
- 组合结构外观设计，符合一致的美学要求
- 寿命长，超过50000小时，质保5年



Black (黑色) Chrome Black (镜面黑) Gold (金色) Mirror (镜面) White oval hole (白色椭圆孔)

Suitable for all size (适用于所有尺寸) Only for cut out ϕ 75mm, 105mm (仅用于开孔尺寸 ϕ 75mm, 105mm)

- CITIZEN COB
- SDCM <3
- 7W/11W/15W/24W/34W
- CRI >90
- AC100-240/220-240V 50/60Hz
- 12° / 24° / 36°
- ϕ 75 / ϕ 105 / ϕ 125 / ϕ 150mm
- 5 YEAR 5 Years Warranty 5年质保


Starwood Downlight Series

Starwood downlight series were designed by well-known lighting designers according to the deep anti-glare lighting performance and application which could achieve UGR<10. Modular design, quickly assemble and disassemble. Front maintenance. Different reflector shapes for options. The shape for fittings include Round, Square, Fixed, Gimbal, Trimless. They are widely used in high-end hotels, villas, clubs, cinemas, offices, restaurants etc.

喜达屋筒灯系列是在深入研究酒店照明需求，集合了数十家国内外知名照明设计公司总监的设计理念后集大智而成，模块化结构设计，拆卸组合方便快捷；深度防眩黑光设计，众多反光罩搭配，光色柔和，见光不见灯；四款大小不同尺寸，方形圆形齐全，带边框无边框兼有，有下照式、洗墙式，防水等级IP44，产品可广泛的使用于高端酒店、别墅、会所、影院、办公室。




Dimensions 产品尺寸 (Unit: mm)

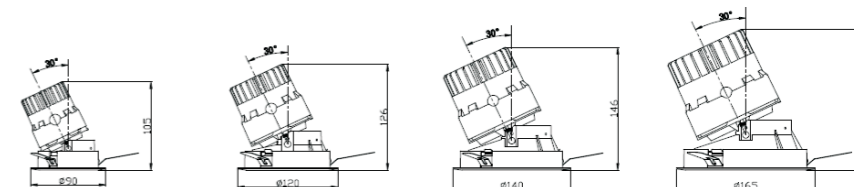

7W/11W 15W 24W 34W

Photometric Diagram 光度分布图

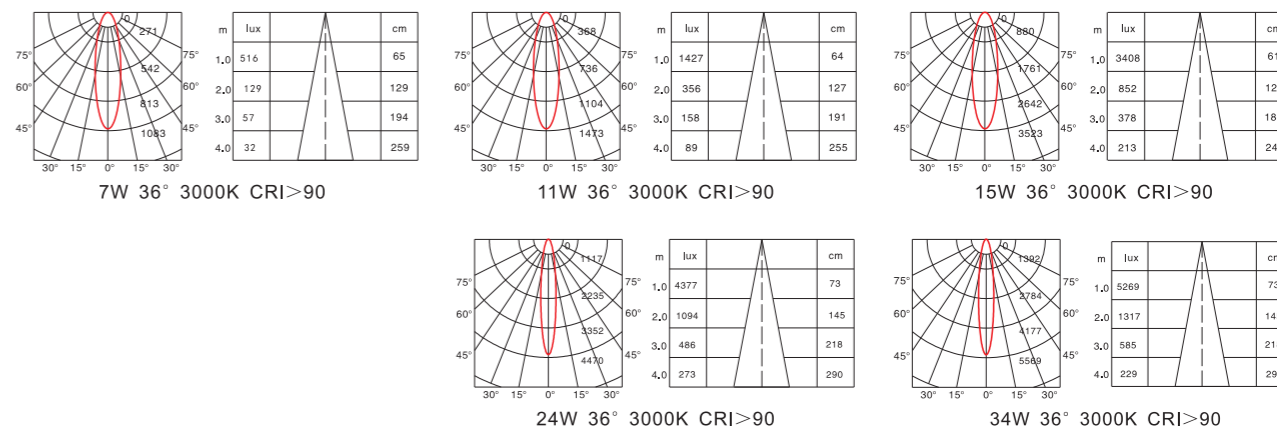

Order Information 产品信息


Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC7507G-927XY RC7507G-930XY RC7507G-940XY	7W	180mA	2700K 3000K 4000K	12° 340lm/24° 352lm/36° 419lm 12° 356lm/24° 516lm/36° 550lm 12° 377lm/24° 543lm/24° 565lm	>90	≥0.95
RC7511G-927XY RC7511G-930XY RC7511G-940XY	11W	300mA	2700K 3000K 4000K	12° 550lm/24° 642lm/36° 566lm 12° 580lm/24° 670lm/36° 621lm 12° 620lm/24° 752lm/24° 667lm	>90	≥0.95
RC10515G-927XY RC10515G-930XY RC10515G-940XY	15W	400mA	2700K 3000K 4000K	12° 1054lm/24° 1058lm/36° 1250lm 12° 1053lm/24° 1117lm/36° 1367lm 12° 1218lm/24° 1275lm/36° 1440lm	>90	≥0.95
RC12524G-927XY RC12524G-930XY RC12524G-940XY	24W	560mA	2700K 3000K 4000K	12° 1655lm/24° 2019lm/36° 1754lm 12° 1748lm/24° 2109lm/36° 1862lm 12° 1874lm/24° 2353lm/36° 1990lm	>90	≥0.95
RC15034G-927XY RC15034G-930XY RC15034G-940XY	34W	820mA	2700K 3000K 4000K	12° 2145lm/24° 2388lm/36° 2208lm 12° 2304lm/24° 2823lm/36° 2274lm 12° 2542lm/24° 3009lm/36° 2810lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality CITIZEN COB, CRI>90, SDCM<3
- Anti-glare design with various free replacement accessories
- Triac, 0-10V and DALI dimming are available
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Long life, >50,000 hours, 5 years warranty

- 高亮度西铁城光源，显指大于90，低色容差SDCM小于3
- 防眩光设计，多种配件自由替换
- 可选配可控硅调光，0-10V调光和DALI调光
- 模组化结构，更易组装，安装拆卸，不损坏天花板
- 组合结构外观设计，符合一致的美学要求
- 寿命长，超过50000小时，质保5年

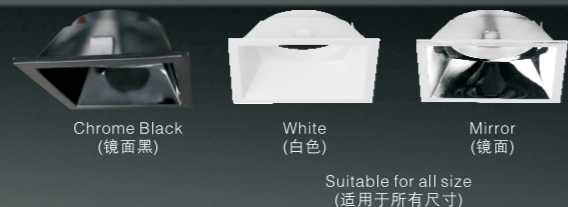

- CITIZEN COB
- SDCM <3
- 7W/11W/15W/24W
- CRI >90
- AC100-240/220-240V 50/60Hz
- 12° /24° /36°
- 75X75/105X105/125X125mm
- 5 YEAR 5 Years Warranty 5年质保


Starwood Downlight Series

Starwood downlight series were designed by well-known lighting designers according to the deep anti-glare lighting performance and application which could achieve UGR<10. Modular design, quickly assemble and disassemble. Front maintenance. Different reflector shapes for options. The shape for fittings include Round, Square, Fixed, Gimbal, Trimless. They are widely used in high-end hotels, villas, clubs, cinemas, offices, restaurants etc.


喜达屋筒灯系列是在深入研究酒店照明需求，集合了数十家国内外知名照明设计公司总监的设计理念后集大智而成，模组化结构设计，拆卸组合方便快捷；深度防眩黑光设计，众多反光罩搭配，光色柔和，见光不见灯；四款大小不同尺寸，方形圆形齐全，带边框无边框兼有，有下照式、洗墙式，防水等级IP44，产品可广泛的使用于高端酒店、别墅、会所、影院、办公室。



Dimensions 产品尺寸 (Unit: mm)

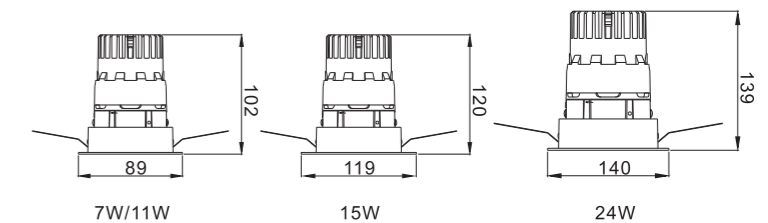

Photometric Diagram 光度分布图

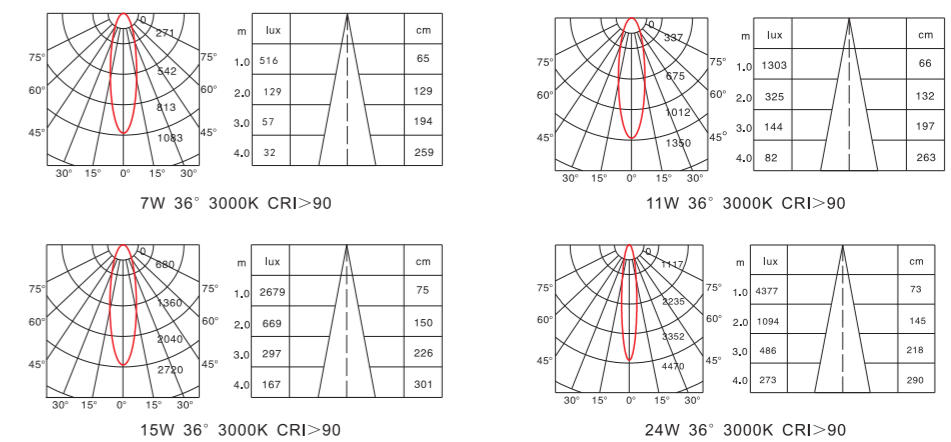

Order Information 产品信息


Model 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
SC7507F-927XY SC7507F-930XY SC7507F-940XY	7W	180mA	2700K 3000K 4000K	12° 340lm/24° 352lm/36° 419lm 12° 356lm/24° 516lm/36° 550lm 12° 377lm/24° 543lm/36° 565lm	>90	≥0.95
SC7511F-927XY SC7511F-930XY SC7511F-940XY	11W	300mA	2700K 3000K 4000K	12° 550lm/24° 642lm/36° 566lm 12° 580lm/24° 670lm/36° 621lm 12° 620lm/24° 752lm/36° 667lm	>90	≥0.95
SC10515F-927XY SC10515F-930XY SC10515F-940XY	15W	400mA	2700K 3000K 4000K	12° 1054lm/24° 1058lm/36° 1250lm 12° 1053lm/24° 1117lm/36° 1367lm 12° 1218lm/24° 1275lm/36° 1440lm	>90	≥0.95
SC12524F-927XY SC12524F-930XY SC12524F-940XY	24W	560mA	2700K 3000K 4000K	12° 1655lm/24° 2019lm/36° 1754lm 12° 1748lm/24° 2109lm/36° 1862lm 12° 1874lm/24° 2353lm/36° 1990lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality CITIZEN COB, CRI>90, SDCM<3
- Anti-glare design with various free replacement accessories
- Triac, 0-10V and DALI dimming are available
- Universally adjustable, 0-30° in vertical, and 360° in horizontal
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Long life, >50,000 hours, 5 years warranty

- 高亮度西铁城光源，显指大于90，低色容差SDCM小于3
- 防眩光设计，多种配件自由替换
- 可选配可控硅调光，0-10V调光和DALI调光
- 垂直转动0-30°，水平360°转动
- 模组化结构，更易组装，安装拆卸，不损坏天花板
- 组合结构外观设计，符合一致的美学要求
- 寿命长，超过50000小时，质保5年

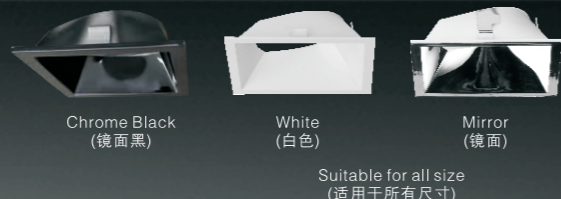

CITIZEN COB

SDCM <3



7W/11W/15W/24W

CRI >90



AC100-240/220-240V 50/60Hz

12° / 24° / 36°



75X75/105X105/125X125mm

5 YEAR 5 Years Warranty 5年质保


Starwood Downlight Series

Starwood downlight series were designed by well-known lighting designers according to the deep anti-glare lighting performance and application which could achieve UGR<10. Modular design, quickly assemble and disassemble. Front maintenance. Different reflector shapes for options. The shape for fittings include Round, Square, Fixed, Gimbal, Trimless. They are widely used in high-end hotels, villas, clubs, cinemas, offices, restaurants etc.

喜达屋筒灯系列是在深入研究酒店照明需求，集合了数十家国内外知名照明设计公司总监的设计理念后集大智而成，模组化结构设计，拆卸组合方便快捷；深度防眩黑光设计，众多反光罩搭配，光色柔和，见光不见灯；四款大小不同尺寸，方形圆形齐全，带边框无边框兼有，有下照式、洗墙式，防水等级IP44，产品可广泛的使用于高端酒店、别墅、会所、影院、办公室。



Dimensions 产品尺寸 (Unit: mm)

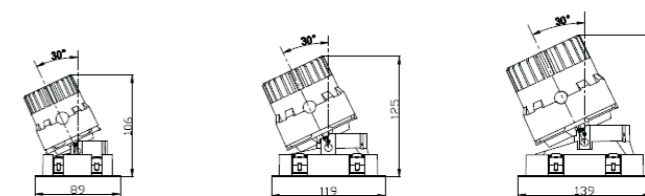


7W/11W


15W

24W


Photometric Diagram 光度分布图

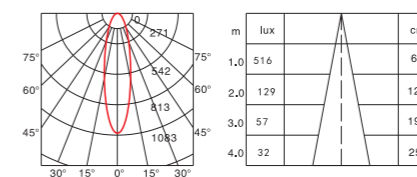


7W 36° 3000K CRI>90

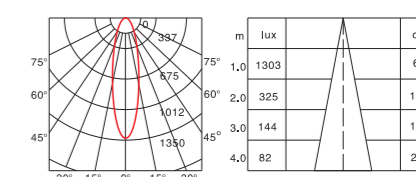

11W 36° 3000K CRI>90

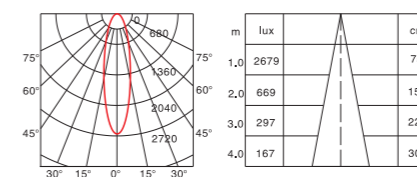

15W 36° 3000K CRI>90

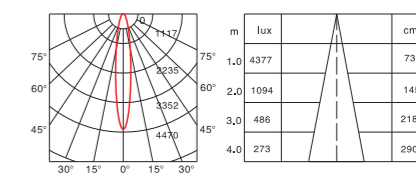

24W 36° 3000K CRI>90

Order Information 产品信息

Model 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
SC7507G-927XY	7W	180mA	2700K	12° 340lm/24° 352lm/36° 419lm	>90	≥0.95
SC7507G-930XY			3000K	12° 356lm/24° 516lm/36° 550lm		
SC7507G-940XY			4000K	12° 377lm/24° 543lm/36° 565lm		
SC7511G-927XY	11W	300mA	2700K	12° 550lm/24° 642lm/36° 566lm	>90	≥0.95
SC7511G-930XY			3000K	12° 580lm/24° 670lm/36° 621lm		
SC7511G-940XY			4000K	12° 620lm/24° 752lm/36° 667lm		
SC10515G-927XY	15W	400mA	2700K	12° 1054lm/24° 1058lm/36° 1250lm	>90	≥0.95
SC10515G-930XY			3000K	12° 1053lm/24° 1117lm/36° 1367lm		
SC10515G-940XY			4000K	12° 1218lm/24° 1275lm/36° 1440lm		
SC12524G-927XY	24W	560mA	2700K	12° 1655lm/24° 2019lm/36° 1754lm	>90	≥0.95
SC12524G-930XY			3000K	12° 1748lm/24° 2109lm/36° 1862lm		
SC12524G-940XY			4000K	12° 1874lm/24° 2353lm/36° 1990lm		

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality CITIZEN COB, CRI>90, SDCM<3
- Anti-glare design with various free replacement accessories
- Triac, 0-10V and DALI dimming are available
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Long life, >50,000 hours, 5 years warranty

- 高亮度面铁城光源，显指大于90，低色容差SDCM小于3
- 防眩光设计，多种配件自由替换
- 可选配可控硅调光，0-10V调光和DALI调光
- 模组化结构，更易组装，安装拆卸，不损坏天花板
- 组合结构外观设计，符合一致的美学要求
- 寿命长，超过50000小时，质保5年



Gold (金色)

Chrome Black (镜面黑)

Mirror (镜面)

Black stairs (黑色台阶)

White (白色)

White round hole (白色圆形孔)

Suitable for all size (适用于所有尺寸)

Only for cut out ϕ 83mm, 113mm (仅用于开孔尺寸 ϕ 83mm, 113mm)



CITIZEN COB

SDCM <3



7W/11W/15W/24W/34W

CRI >90



AC100-240/220-240V 50/60Hz

12° / 24° / 36°



ϕ 83/ ϕ 113/ ϕ 133/ ϕ 150mm



5 Years Warranty 5年质保


Starwood Downlight Series

Starwood downlight series were designed by well-known lighting designers according to the deep anti-glare lighting performance and application which could achieve UGR<10. Modular design, quickly assemble and disassemble. Front maintenance. Different reflector shapes for options. The shape for fittings include Round, Square, Fixed, Gimbal, Trimless. They are widely used in high-end hotels, villas, clubs, cinemas, offices, restaurants etc.


喜达屋筒灯系列是在深入研究酒店照明需求，集合了数十家国内外知名照明设计公司总监的设计理念后集大智而成，模组化结构设计，拆卸组合方便快捷；深度防眩黑光设计，众多反光罩搭配，光色柔和，见光不见灯；四款大小不同尺寸，方形圆形齐全，带边框无边框兼有，有下照式、洗墙式，防水等级IP44，产品可广泛的使用于高端酒店、别墅、会所、影院、办公室。



Dimensions 产品尺寸 (Unit: mm)

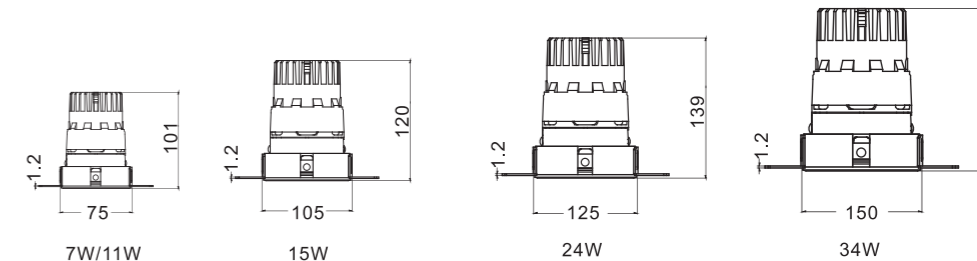

Photometric Diagram 光度分布图

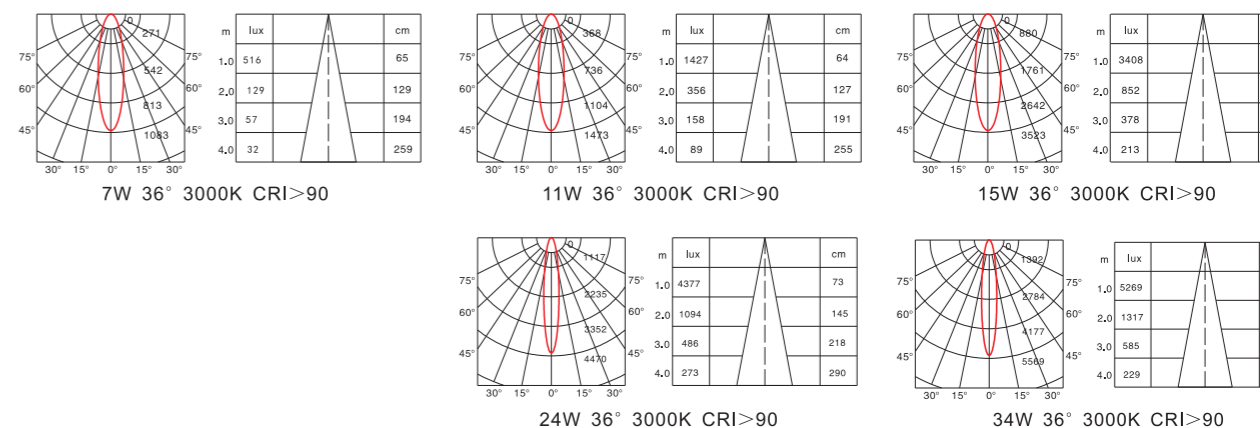

Order Information 产品信息


Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
TR7507F-927XY TR7507F-930XY TR7507F-940XY	7W	180mA	2700K 3000K 4000K	12° 340lm/24° 352lm/36° 419lm 12° 356lm/24° 516lm/36° 550lm 12° 377lm/24° 543lm/36° 565lm	>90	≥0.95
TR7511F-927XY TR7511F-930XY TR7511F-940XY	11W	300mA	2700K 3000K 4000K	12° 550lm/24° 642lm/36° 566lm 12° 580lm/24° 670lm/36° 621lm 12° 620lm/24° 752lm/36° 667lm	>90	≥0.95
TR10515F-927XY TR10515F-930XY TR10515F-940XY	15W	400mA	2700K 3000K 4000K	12° 1054lm/24° 1058lm/36° 1250lm 12° 1053lm/24° 1117lm/36° 1367lm 12° 1218lm/24° 1275lm/36° 1440lm	>90	≥0.95
TR12524F-927XY TR12524F-930XY TR12524F-940XY	24W	560mA	2700K 3000K 4000K	12° 1655lm/24° 2019lm/36° 1754lm 12° 1748lm/24° 2109lm/36° 1862lm 12° 1874lm/24° 2353lm/36° 1990lm	>90	≥0.95
TR15034F-927XY TR15034F-930XY TR15034F-940XY	34W	820mA	2700K 3000K 4000K	12° 2145lm/24° 2388lm/36° 2208lm 12° 2304lm/24° 2823lm/36° 2274lm 12° 2542lm/24° 3009lm/36° 2810lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality CITIZEN COB, CRI>90, SDCM<3
- Anti-glare design with various free replacement accessories
- Triac, 0-10V and DALI dimming are available
- Universally adjustable, 0-30° in vertical, and 360° in horizontal
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Long life, >50,000 hours, 5 years warranty

- 高亮度西铁城光源，显指大于90，低色容差SDCM小于3
- 防眩光设计，多种配件自由替换
- 可选配可控硅调光，0-10V调光和DALI调光
- 垂直转动0-30°，水平360°转动
- 模块化结构，更易组装，安装拆卸，不损坏天花板
- 组合结构外观设计，符合一致的美学要求
- 寿命长，超过50000小时，质保5年

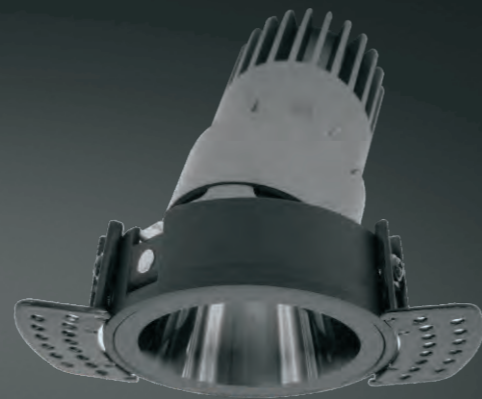

Black (黑色)

Chrome Black (镜面黑)

Gold (金色)

Mirror (镜面)

White oval hole (白色椭圆孔)

Suitable for all size (适用于所有尺寸)

Only for cut out ϕ 83mm, 113mm (仅用于开孔尺寸 ϕ 83mm, 113mm)



CITIZEN COB

SDCM <3



7W/11W/15W/24W/34W

CRI >90



AC100-240/220-240V 50/60Hz

12°/24°/36°



ϕ 83/ ϕ 113/ ϕ 133/ ϕ 158mm

5 YEAR 5 Years Warranty 5年质保


Starwood Downlight Series

Starwood downlight series were designed by well-known lighting designers according to the deep anti-glare lighting performance and application which could achieve UGR<10. Modular design, quickly assemble and disassemble. Front maintenance. Different reflector shapes for options. The shape for fittings include Round, Square, Fixed, Gimbal, Trimless. They are widely used in high-end hotels, villas, clubs, cinemas, offices, restaurants etc.


喜达屋筒灯系列是在深入研究酒店照明需求，集合了数十家国内外知名照明设计公司总监的设计理念后集大智而成，模块化结构设计，拆卸组合方便快捷；深度防眩黑光设计，众多反光罩搭配，光色柔和，见光不见灯；四款大小不同尺寸，方形圆形齐全，带边框无边框兼有，有下照式、洗墙式，防水等级IP44，产品可广泛的使用于高端酒店、别墅、会所、影院、办公室。



Dimensions 产品尺寸 (Unit: mm)

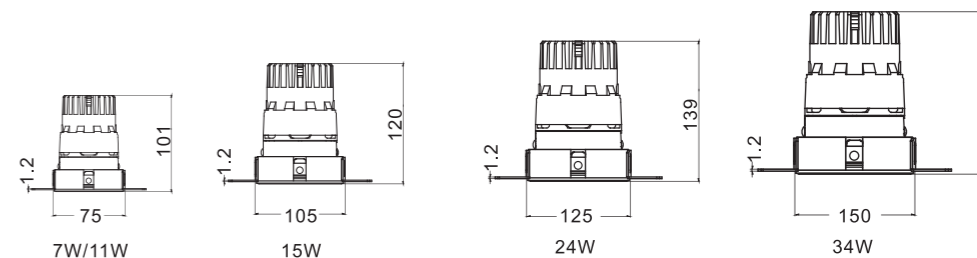

Photometric Diagram 光度分布图

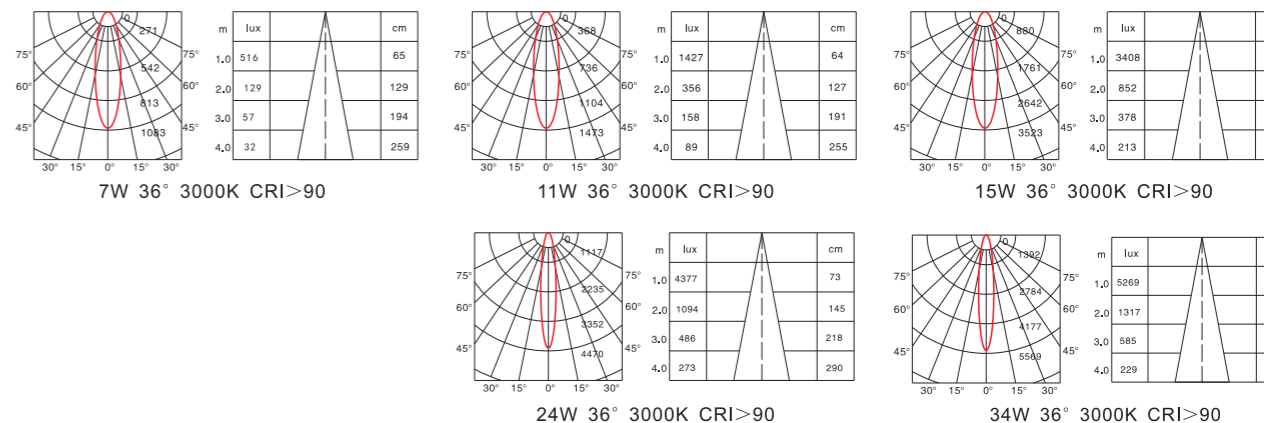

Order Information 产品信息



Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
TR7507G-927XY	7W	180mA	2700K	12° 340lm/24° 352lm/36° 419lm	>90	≥0.95
TR7507G-930XY			3000K	12° 356lm/24° 516lm/36° 550lm		
TR7507G-940XY			4000K	12° 377lm/24° 543lm/36° 565lm		
TR7511G-927XY	11W	300mA	2700K	12° 550lm/24° 642lm/36° 566lm	>90	≥0.95
TR7511G-930XY			3000K	12° 580lm/24° 670lm/36° 621lm		
TR7511G-940XY			4000K	12° 620lm/24° 752lm/36° 667lm		
TR10515G-927XY	15W	400mA	2700K	12° 1054lm/24° 1058lm/36° 1250lm	>90	≥0.95
TR10515G-930XY			3000K	12° 1053lm/24° 1117lm/36° 1367lm		
TR10515G-940XY			4000K	12° 1218lm/24° 1275lm/36° 1440lm		
TR12524G-927XY	24W	560mA	2700K	12° 1655lm/24° 2019lm/36° 1754lm	>90	≥0.95
TR12524G-930XY			3000K	12° 1748lm/24° 2109lm/36° 1862lm		
TR12524G-940XY			4000K	12° 1874lm/24° 2353lm/36° 1990lm		
TR15034G-927XY	34W	820mA	2700K	12° 2145lm/24° 2388lm/36° 2208lm	>90	≥0.95
TR15034G-930XY			3000K	12° 2304lm/24° 2823lm/36° 2274lm		
TR15034G-940XY			4000K	12° 2542lm/24° 3009lm/36° 2810lm		

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality CITIZEN COB, CRI>90, SDCM<3
- Anti-glare design with various free replacement accessories
- Triac, 0-10V and DALI dimming are available
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Long life, >50,000 hours, 5 years warranty

- 高亮度面铁城光源，显指大于90，低色容差SDCM小于3
- 防眩光设计，多种配件自由替换
- 可选配可控硅调光，0-10V调光和DALI调光
- 模块化结构，更易组装，安装拆卸，不损坏天花板
- 组合结构外观设计，符合一致的美学要求
- 寿命长，超过50000小时，质保5年

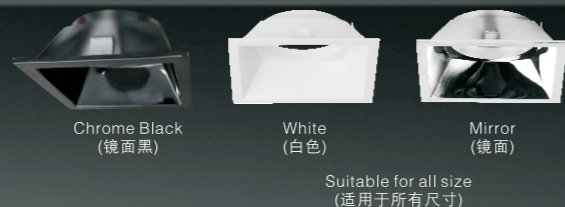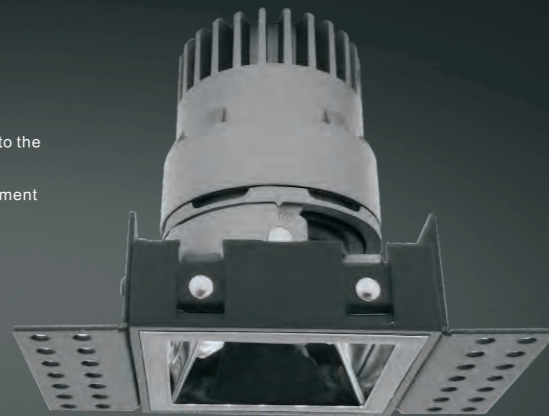


- CITIZEN COB
- SDCM <3
- 7W/11W/15W/24W
- CRI >90
- AC100-240/220-240V 50/60Hz
- 12° / 24° / 36°
- 83X83/113X113/133X133mm
- 5 Years Warranty 5年质保


Starwood Downlight Series

Starwood downlight series were designed by well-known lighting designers according to the deep anti-glare lighting performance and application which could achieve UGR<10. Modular design, quickly assemble and disassemble. Front maintenance. Different reflector shapes for options. The shape for fittings include Round, Square, Fixed, Gimbal, Trimless. They are widely used in high-end hotels, villas, clubs, cinemas, offices, restaurants etc.


喜达屋筒灯系列是在深入研究酒店照明需求，集合了数十家国内外知名照明设计公司总监的设计理念后集大智而成，模块化结构设计，拆卸组合方便快捷；深度防眩黑光设计，众多反光罩搭配，光色柔和，见光不见灯；四款大小不同尺寸，方形圆形齐全，带边框无边框兼有，有下照式、洗墙式，防水等级IP44，产品可广泛的使用于高端酒店、别墅、会所、影院、办公室。

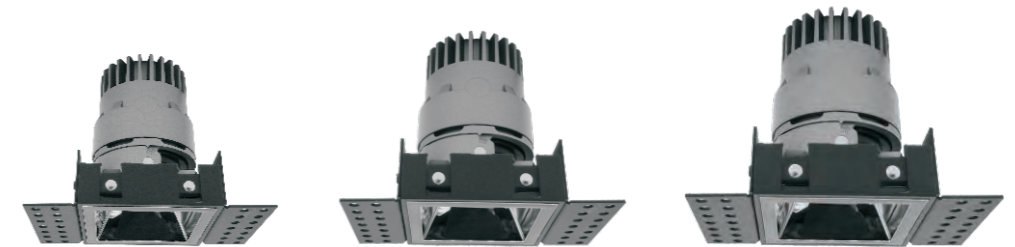

Dimensions 产品尺寸 (Unit: mm)

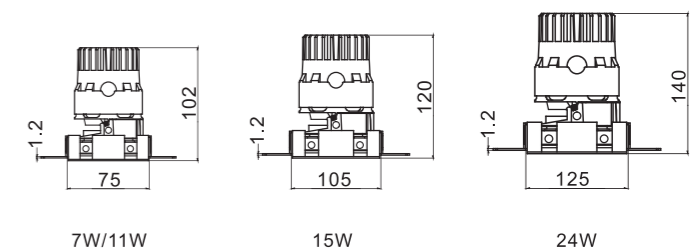

Photometric Diagram 光度分布图

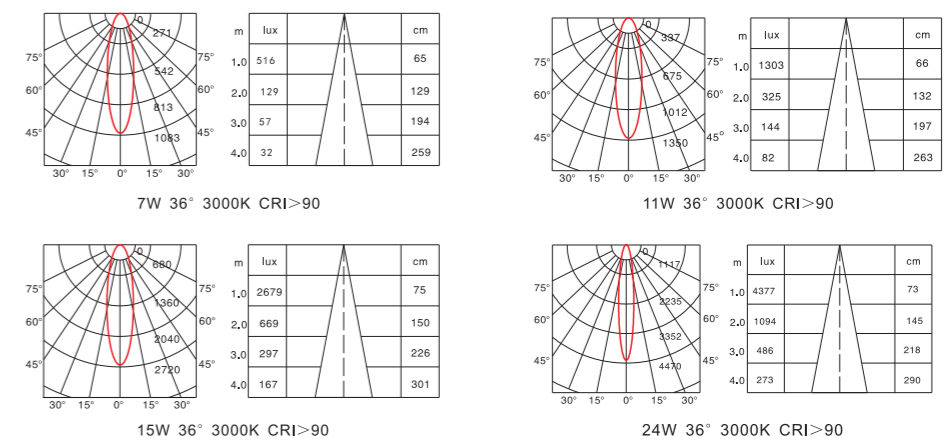

Order Information 产品信息



Model 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
TS7507F-927XY	7W	180mA	2700K	12° 340lm/24° 352lm/36° 419lm	>90	≥0.95
TS7507F-930XY			3000K	12° 356lm/24° 516lm/36° 550lm		
TS7507F-940XY			4000K	12° 377lm/24° 543lm/36° 565lm		
TS7511F-927XY	11W	300mA	2700K	12° 550lm/24° 642lm/36° 566lm	>90	≥0.95
TS7511F-930XY			3000K	12° 580lm/24° 670lm/36° 621lm		
TS7511F-940XY			4000K	12° 620lm/24° 752lm/36° 667lm		
TS10515F-927XY	15W	400mA	2700K	12° 1054lm/24° 1058lm/36° 1250lm	>90	≥0.95
TS10515F-930XY			3000K	12° 1053lm/24° 1117lm/36° 1367lm		
TS10515F-940XY			4000K	12° 1218lm/24° 1275lm/36° 1440lm		
TS12524F-927XY	24W	560mA	2700K	12° 1655lm/24° 2019lm/36° 1754lm	>90	≥0.95
TS12524F-930XY			3000K	12° 1748lm/24° 2109lm/36° 1862lm		
TS12524F-940XY			4000K	12° 1874lm/24° 2353lm/36° 1990lm		

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality CITIZEN COB, CRI>90, SDCM<3
- Anti-glare design with various free replacement accessories
- Triac, 0-10V and DALI dimming are available
- Universally adjustable, 0-30° in vertical, and 360° in horizontal
- Modularity structure, easier to assemble, install and disassemble, no damage to the ceiling floor
- Family structure appearance design to meet with the uniform aesthetic requirement
- Long life, >50,000 hours, 5 years warranty

- 高亮度西铁城光源，显指大于90，低色容差SDCM小于3
- 防眩光设计，多种配件自由替换
- 可选配可控硅调光，0-10V调光和DALI调光
- 垂直转动0-30°，水平360°转动
- 模块化结构，更易组装，安装拆卸，不损坏天花板
- 组合结构外观设计，符合一致的美学要求
- 寿命长，超过50000小时，质保5年

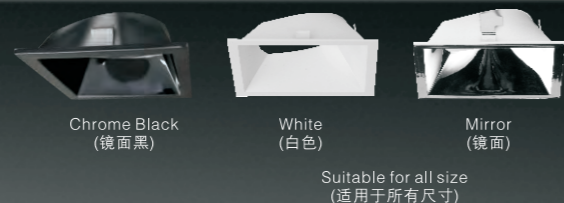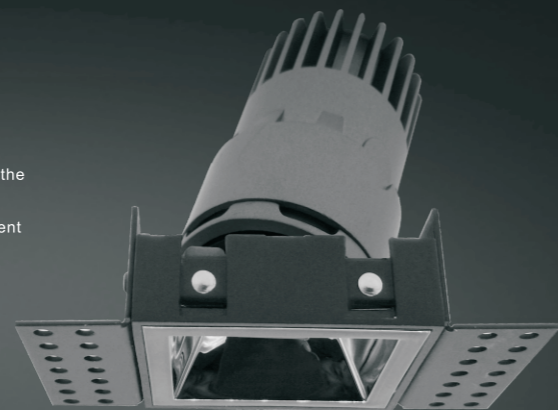

- CITIZEN COB
- SDCM <3
- 7W/11W/15W/24W
- CRI >90
- AC100-240/220-240V 50/60Hz
- 12° / 24° / 36°
- 83X83/113X113/133X133mm
- 5 Years Warranty
5年质保


Starwood Downlight Series

Starwood downlight series were designed by well-known lighting designers according to the deep anti-glare lighting performance and application which could achieve UGR<10. Modular design, quickly assemble and disassemble. Front maintenance. Different reflector shapes for options. The shape for fittings include Round, Square, Fixed, Gimbal, Trimless. They are widely used in high-end hotels, villas, clubs, cinemas, offices, restaurants etc.


喜达屋筒灯系列是在深入研究酒店照明需求，集合了数十家国内外知名照明设计公司总监的设计理念后集大智而成，模块化结构设计，拆卸组合方便快捷；深度防眩黑光设计，众多反光罩搭配，光色柔和，见光不见灯；四款大小不同尺寸，方形圆形齐全，带边框无边框兼有，有下照式、洗墙式，防水等级IP44，产品可广泛的使用于高端酒店、别墅、会所、影院、办公室。



Dimensions 产品尺寸 (Unit: mm)

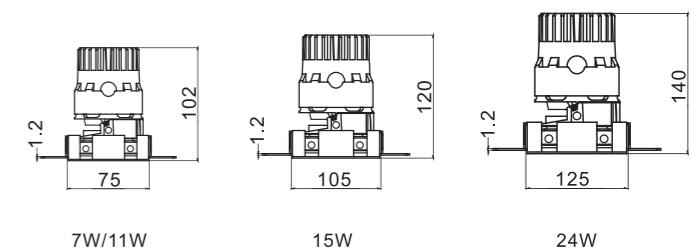

Photometric Diagram 光度分布图

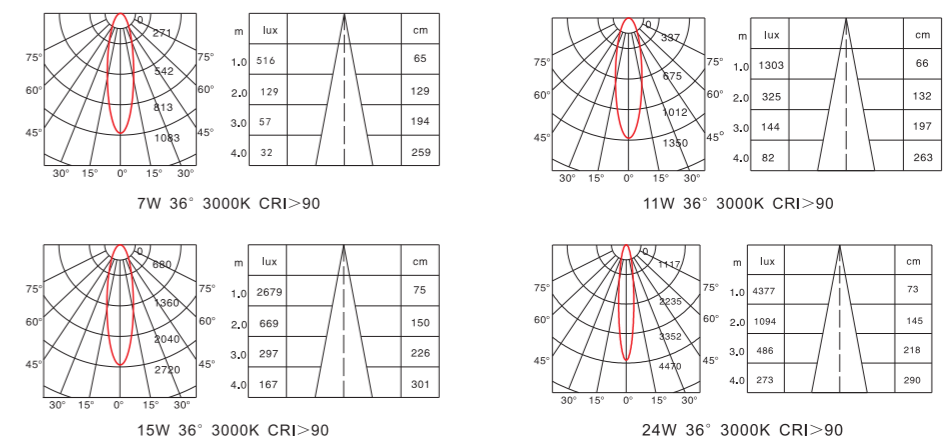

Order Information 产品信息

Model 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
TS7507G-927XY TS7507G-930XY TS7507G-940XY	7W	180mA	2700K 3000K 4000K	12° 340lm/24° 352lm/36° 419lm 12° 356lm/24° 516lm/36° 550lm 12° 377lm/24° 543lm/36° 565lm	>90	≥0.95
TS7511G-927XY TS7511G-930XY TS7511G-940XY	11W	300mA	2700K 3000K 4000K	12° 550lm/24° 642lm/36° 566lm 12° 580lm/24° 670lm/36° 621lm 12° 620lm/24° 752lm/36° 667lm	>90	≥0.95
TS10515G-927XY TS10515G-930XY TS10515G-940XY	15W	400mA	2700K 3000K 4000K	12° 1054lm/24° 1058lm/36° 1250lm 12° 1053lm/24° 1117lm/36° 1367lm 12° 1218lm/24° 1275lm/36° 1440lm	>90	≥0.95
TS12524G-927XY TS12524G-930XY TS12524G-940XY	24W	560mA	2700K 3000K 4000K	12° 1655lm/24° 2019lm/36° 1754lm 12° 1748lm/24° 2109lm/36° 1862lm 12° 1874lm/24° 2353lm/36° 1990lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

DOWNLIGHT SERIES

筒灯系列

Model.型号

DLC04-A
DLC04-B
DLC05-A
DLC05-B
DLC06-A
DLC06-B
DLC08-A
DLC08-B
DLC10-A
DLC10-B
DLC10-D

Power.功率

15 / 20 / 25 / 30 / 35 / 40 / 55W
15 / 20 / 25 / 30 / 35 / 40 / 55W
15 / 20 / 25 / 30 / 35 / 40 / 55W
15 / 20 / 25 / 30 / 35 / 40 / 55W
22 / 28 / 38 / 50 / 60 / 70 / 80 W
22 / 28 / 38 / 50 / 60 / 70 / 80 W
22 / 28 / 38 / 50 / 60 / 70 / 80 / 100W
22 / 28 / 38 / 50 / 60 / 70 / 80 / 100W
22 / 28 / 38 / 50 / 60 / 70 / 80 / 100W
22 / 28 / 38 / 50 / 60 / 70 / 80 / 100W
22 / 28 / 38 / 50 / 60 / 70 / 80 / 100W



Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度，低色容差SDCM <3，低光衰，UGR<19
- 高光效，高照度，标准的光束角营造舒适的照明环境
- 精心组装和设计，保证长达40000小时的使用寿命
- 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
- 易于安装，适用于飞机场，火车站，展示厅，酒店大堂，办公室，商场等场所。



CITIZEN COB



SDCM <3



15W/20W/25W/30W/
35W/40W/55W



CRI >90



AC100-240/220-240V 50/60Hz



30°



φ 125mm



5 YEAR
5 Years Warranty
5年质保


DLC04-A Series

DLC04-A are originally researched and developed by KWT, pure aluminum heat sink, the general design requirements with two reflector cups, two times optical principle, frost glass diffuser, first optics to use PC reflector, reflective rate>95%, second optics to use 1090 reflector, top quality CITIZEN COB, with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.


DLC04-A是由金瓦特自主设计研发，采用纯铝散热器，总体设计具有两个反光杯，高效雾面玻璃透光片，一次光学使用PC反射镜，反射率>95%，二次光学采用1090电镀镜面反光镜，高品质西铁城光源，搭配金瓦特高品质外置恒流驱动电源，可调光，深度防眩，散热良好，质量稳定，整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

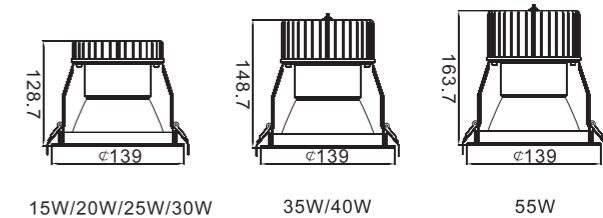

Photometric Diagram 光度分布图

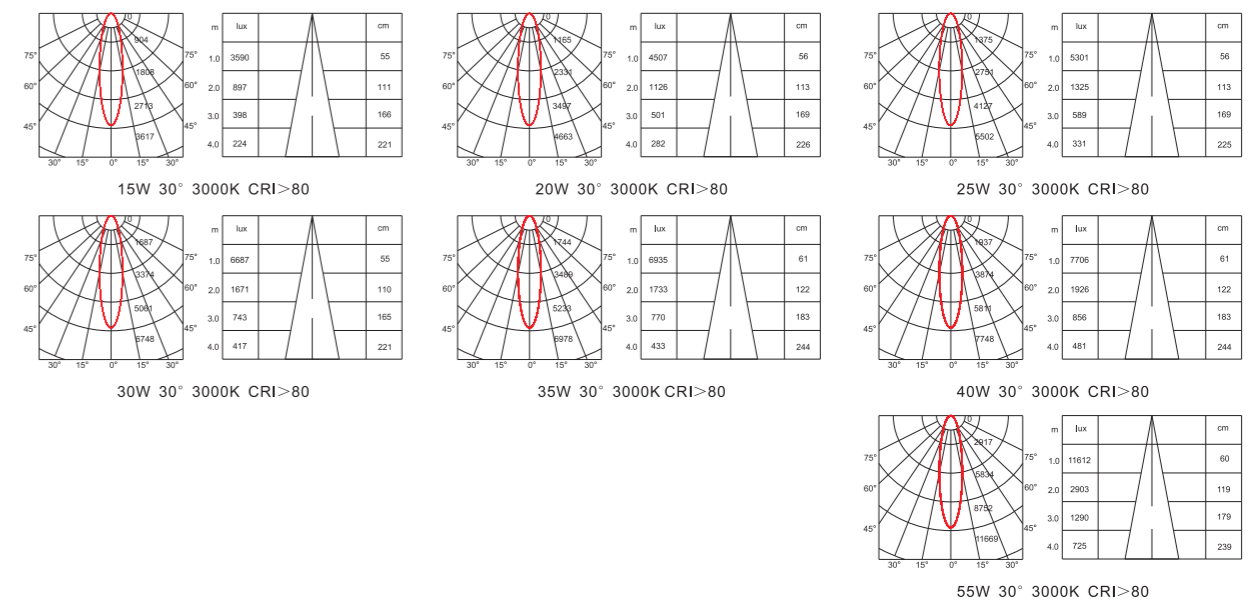

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC0415A-930XY DLC0415A-940XY	15W	360mA	3000K 4000K	1419lm 1589lm	>90	≥0.95
DLC0420A-930XY DLC0420A-940XY	20W	480mA	3000K 4000K	1854lm 1832lm	>90	≥0.95
DLC0425A-930XY DLC0425A-940XY	25W	600mA	3000K 4000K	2158lm 2325lm	>90	≥0.95
DLC0430A-930XY DLC0430A-940XY	30W	720mA	3000K 4000K	2448lm 2612lm	>90	≥0.95
DLC0435A-930XY DLC0435A-940XY	35W	850mA	3000K 4000K	2986lm 2999lm	>90	≥0.95
DLC0440A-930XY DLC0440A-940XY	40W	960mA	3000K 4000K	3317lm 3435lm	>90	≥0.95
DLC0455A-930XY DLC0455A-940XY	55W	1300mA	3000K 4000K	4801lm 4813lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) Y=B(Black) Y=W(White)


Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.


- 高亮度，低色容差SDCM <3，低光衰，UGR<19
- 高光效，高照度，标准的光束角营造舒适的照明环境
- 精心组装和设计，保证长达40000小时的使用寿命
- 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
- 易于安装，适用于飞机场，火车站，展示厅，酒店大堂，办公室，商场等场所。



Dimensions 产品尺寸 (Unit: mm)

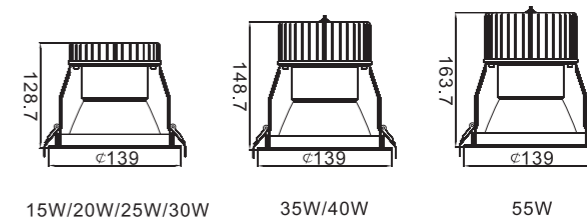

Photometric Diagram 光度分布图

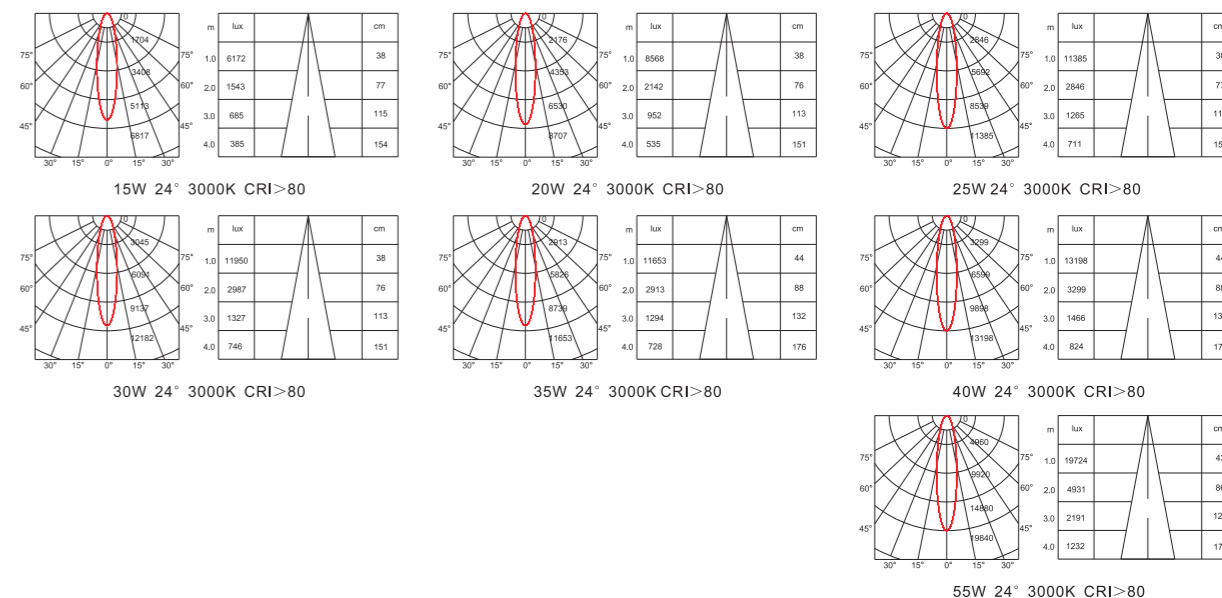

CITIZEN COB



SDCM <3



15W/20W/25W/30W/
35W/40W/55W



CRI >90



AC100-240/220-240V 50/60Hz



15° /24° /36° /50°



φ 125mm



5 YEARS
5 Years Warranty
5年质保

DLC04-B Series

DLC04-B are originally researched and developed by KWT, pure aluminum heat sink, the general design requirements with two reflector cups, two times optical principle, frost glass diffuser, first optics to use PC reflector, reflective rate>95%, second optics to use 1090 reflector, top quality CITIZEN COB, with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLC04-B是由金瓦特自主设计研发，采用纯铝散热器，总体设计具有两个反光杯，高效雾面玻璃透光片，一次光学使用PC反射镜，反射率>95%，二次光学采用1090磨砂雾面反光镜，高品质西铁城光源，搭配金瓦特高品质外置恒流驱动电源，可调光，深度防眩，散热良好，质量稳定，整灯寿命超过40,000小时。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC0415B-930XY DLC0415B-940XY	15W	360mA	3000K 15° 4000K 15°	1516lm/24° 1494lm/36° 1508lm/50° 1464lm	>90	≥0.95
DLC0420B-930XY DLC0420B-940XY	20W	480mA	3000K 15° 4000K 15°	2006lm/24° 1955lm/36° 1966lm/50° 2056lm	>90	≥0.95
DLC0425B-930XY DLC0425B-940XY	25W	600mA	3000K 15° 4000K 15°	2344lm/24° 2320lm/36° 2341lm/50° 2332lm	>90	≥0.95
DLC0430B-930XY DLC0430B-940XY	30W	720mA	3000K 15° 4000K 15°	2686lm/24° 2731lm/36° 2682lm/50° 2633lm	>90	≥0.95
DLC0435B-930XY DLC0435B-940XY	35W	850mA	3000K 15° 4000K 15°	3325lm/24° 3205lm/36° 3178lm/50° 3159lm	>90	≥0.95
DLC0440B-930XY DLC0440B-940XY	40W	960mA	3000K 15° 4000K 15°	3630lm/24° 3638lm/36° 3590lm/50° 3494lm	>90	≥0.95
DLC0455B-930XY DLC0455B-940XY	55W	1300mA	3000K 15° 4000K 15°	5158lm/24° 5248lm/36° 5259lm/50° 4904lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度，低色容差SDCM <3，低光衰，UGR<19
- 高光效，高照度，标准的光束角营造舒适的照明环境
- 精心组装和设计，保证长达40000小时的使用寿命
- 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
- 易于安装，适用于飞机场，火车站，展示厅，酒店大堂，办公室，商场等场所。



CITIZEN COB



SDCM <3



15W/20W/25W/30W/
35W/40W/55W



CRI >90



AC100-240/220-240V 50/60Hz



45°



φ 155mm



5 YEARS
5 Years Warranty
5年质保


DLC05-A Series

DLC05-A are originally researched and developed by KWT, pure aluminum heat sink, the general design requirements with two reflector cups, two times optical principle, frost glass diffuser, first optics to use PC reflector, reflective rate>95%, second optics to use 1090 reflector, top quality CITIZEN COB, with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.


DLC05-A是由金瓦特自主设计研发，采用纯铝散热器，总体设计具有两个反光杯，高效雾面玻璃透光片，一次光学使用PC反射镜，反射率>95%，二次光学采用1090电镀镜面反光镜，高品质西铁城光源，搭配金瓦特高品质外置恒流驱动电源，可调光，深度防眩，散热良好，质量稳定，整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

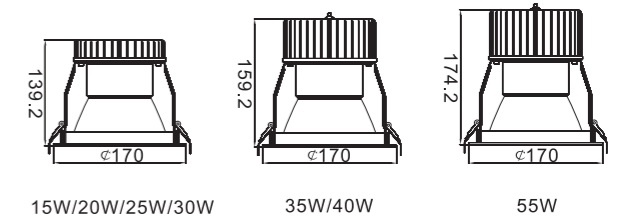

Photometric Diagram 光度分布图

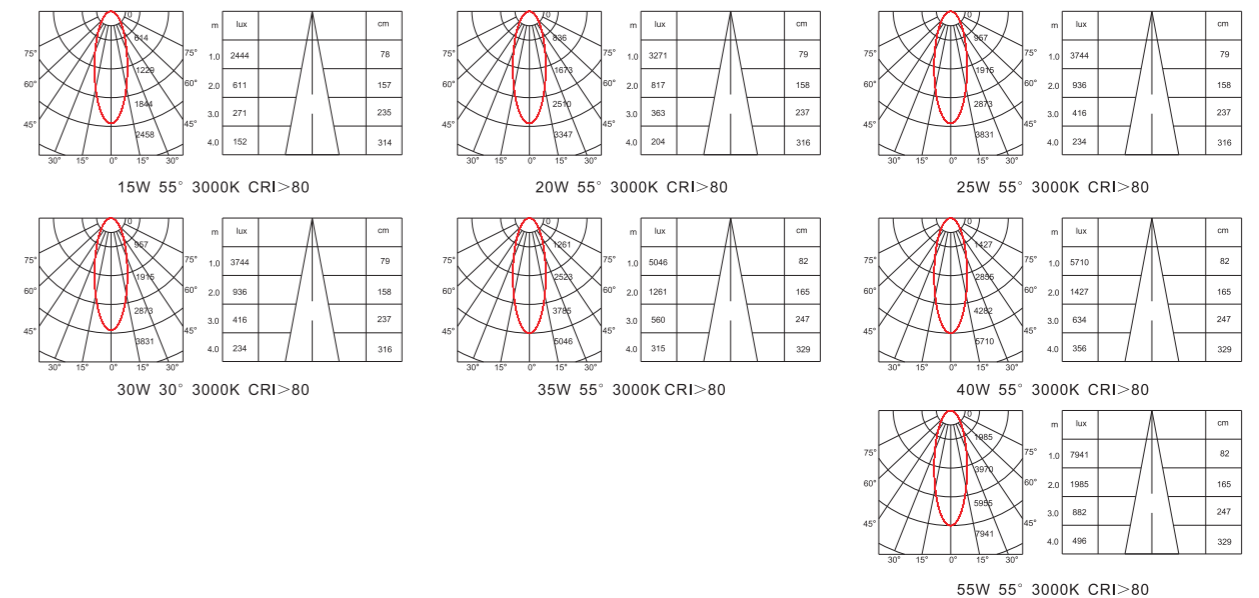

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC0515A-930XY DLC0515A-940XY	15W	360mA	3000K 4000K	1410lm 1580lm	>90	≥0.95
DLC0520A-930XY DLC0520A-940XY	20W	480mA	3000K 4000K	1915lm 1863lm	>90	≥0.95
DLC0525A-930XY DLC0525A-940XY	25W	600mA	3000K 4000K	2191lm 2306lm	>90	≥0.95
DLC0530A-930XY DLC0530A-940XY	30W	720mA	3000K 4000K	2522lm 2653lm	>90	≥0.95
DLC0535A-930XY DLC0535A-940XY	35W	850mA	3000K 4000K	3023lm 3074lm	>90	≥0.95
DLC0540A-930XY DLC0540A-940XY	40W	960mA	3000K 4000K	3420lm 3411lm	>90	≥0.95
DLC0555A-930XY DLC0555A-940XY	55W	1300mA	3000K 4000K	4721lm 4905lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) Y=B(Black) Y=W(White)


Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac, 0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.


- 高亮度，低色容差SDCM <3，低光衰，UGR<19
- 高光效，高照度，标准的光束角营造舒适的照明环境
- 精心组装和设计，保证长达40000小时的使用寿命
- 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
- 易于安装，适用于飞机场，火车站，展示厅，酒店大堂，办公室，商场等场所。



Dimensions 产品尺寸 (Unit: mm)

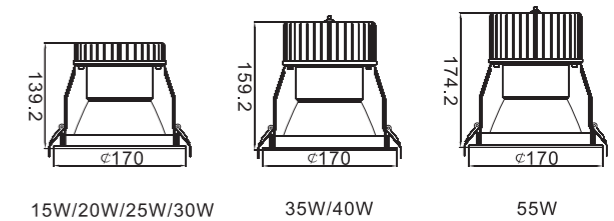

Photometric Diagram 光度分布图

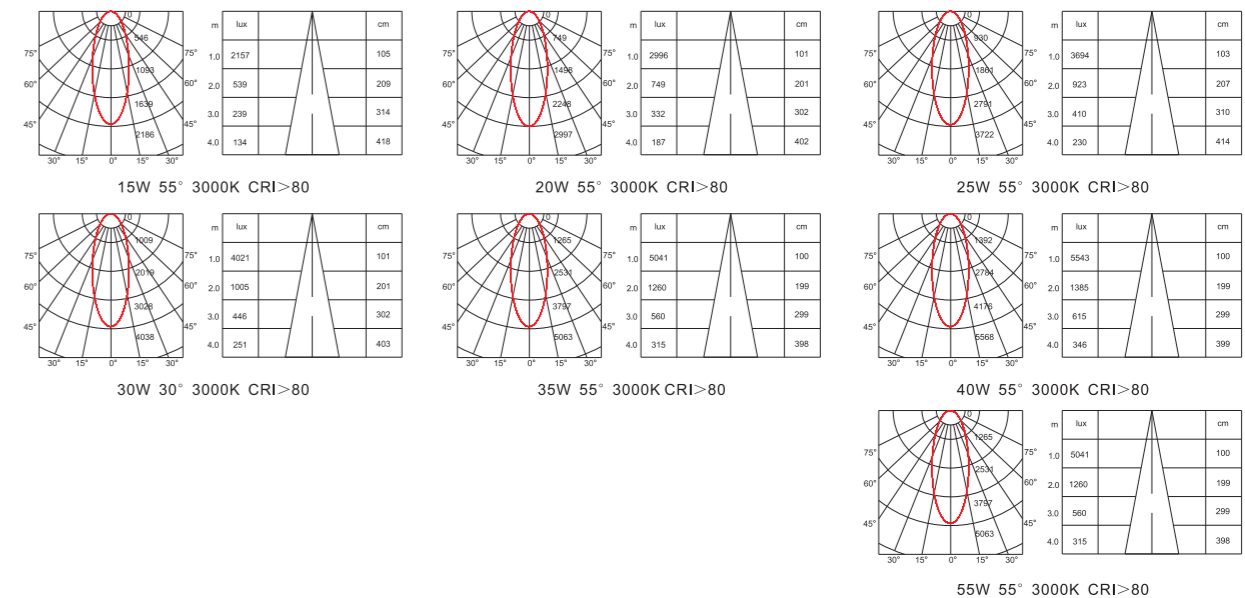

CITIZEN COB



SDCM <3



15W/20W/25W/30W/
35W/40W/55W



CRI >90



AC100-240/220-240V 50/60Hz



15° /24° /36° /55°



φ 155mm



5 YEAR
5 Years Warranty
5年质保

DLC05-B Series

DLC05-B are originally researched and developed by KWT, pure aluminum heat sink, the general design requirements with two reflector cups, two times optical principle, frost glass diffuser, first optics to use PC reflector, reflective rate>95%, second optics to use 1090 reflector, top quality CITIZEN COB, with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLC05-B是由金瓦特自主设计研发，采用纯铝散热器，总体设计具有两个反光杯，高效雾面玻璃透光片，一次光学使用PC反射镜，反射率>95%，二次光学采用1090磨砂雾面反光镜，高品质西铁城光源，搭配金瓦特高品质外置恒流驱动电源，可调光，深度防眩，散热良好，质量稳定，整灯寿命超过40,000小时。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量			CRI 显指	PF 功率因数
DLC0515B-930XY DLC0515B-940XY	15W	360mA	3000K 4000K	15° 1525lm/24° 15° 1708lm/24°	1514lm/36° 1691lm/36°	1547lm/55° 1726lm/55°	1507lm 1667lm	>90 ≥0.95
DLC0520B-930XY DLC0520B-940XY	20W	480mA	3000K 4000K	15° 2055lm/24° 15° 2029lm/24°	2105lm/36° 2009lm/36°	2095lm/55° 2010lm/55°	2028lm 1978lm	>90 ≥0.95
DLC0525B-930XY DLC0525B-940XY	25W	600mA	3000K 4000K	15° 2407lm/24° 15° 2604lm/24°	2450lm/36° 2665lm/36°	2434lm/55° 2560lm/55°	2366lm 2535lm	>90 ≥0.95
DLC0530B-930XY DLC0530B-940XY	30W	720mA	3000K 4000K	15° 2728lm/24° 15° 3027lm/24°	2758lm/36° 3004lm/36°	2751lm/55° 2986lm/55°	2717lm 2855lm	>90 ≥0.95
DLC0535B-930XY DLC0535B-940XY	35W	850mA	3000K 4000K	15° 3276lm/24° 15° 3392lm/24°	3313lm/36° 3396lm/36°	3318lm/55° 3329lm/55°	3217lm 3362lm	>90 ≥0.95
DLC0540B-930XY DLC0540B-940XY	40W	960mA	3000K 4000K	15° 3710lm/24° 15° 3907lm/24°	3688lm/36° 3757lm/36°	3831lm/55° 3777lm/55°	3602lm 3702lm	>90 ≥0.95
DLC0555B-930XY DLC0555B-940XY	55W	1300mA	3000K 4000K	15° 5295lm/24° 15° 5059lm/24°	5286lm/36° 5225lm/36°	5255lm/55° 5329lm/55°	5065lm 5217lm	>90 ≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度，低色容差SDCM <3，低光衰，UGR<19
- 高光效，高照度，标准的光束角营造舒适的照明环境
- 精心组装和设计，保证长达40000小时的使用寿命
- 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
- 易于安装，适用于飞机场，火车站，展示厅，酒店大堂，办公室，商场等场所。



MAX 80W



CITIZEN COB

SDCM <3



22W/28W/38W/50W/
60W/70W/80W

CRI >90



AC100-240/220-240V 50/60Hz



30°



φ 175mm

5 YEAR
5 Years Warranty
5年质保


DLC06-A Series

DLC06-A downlights use high quality original CITIZEN COB LED. The general design requirements with two reflector cups, two times optical principle, frosted glass diffuser, pure aluminum heatsink. Many different wattage for options. The max wattage could reach 100W. Glareless, gentle light. Widely to use in industry, high ceiling, high space or glareless requirements exclusive place.


DLC06-A是由金瓦特自主设计研发，采用纯铝散热器，总体设计具有两个反光杯，高效雾面玻璃透光片，一次光学使用PC反射镜，反射率>95%，二次光学采用1090电镀镜面反光镜，高品质西铁城光源，搭配金瓦特高品质外置恒流驱动电源，可调光，深度防眩，散热良好，质量稳定，整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

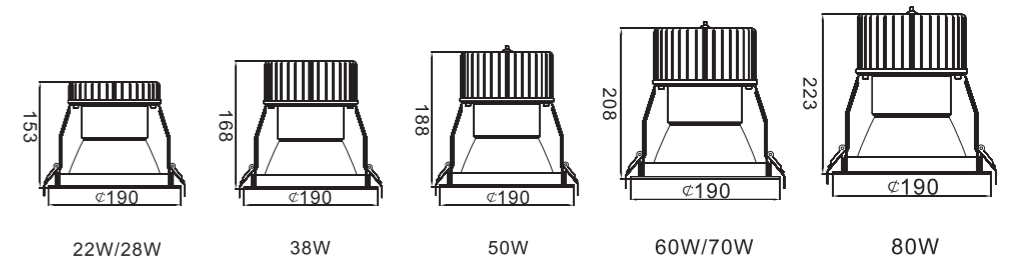

Photometric Diagram 光度分布图

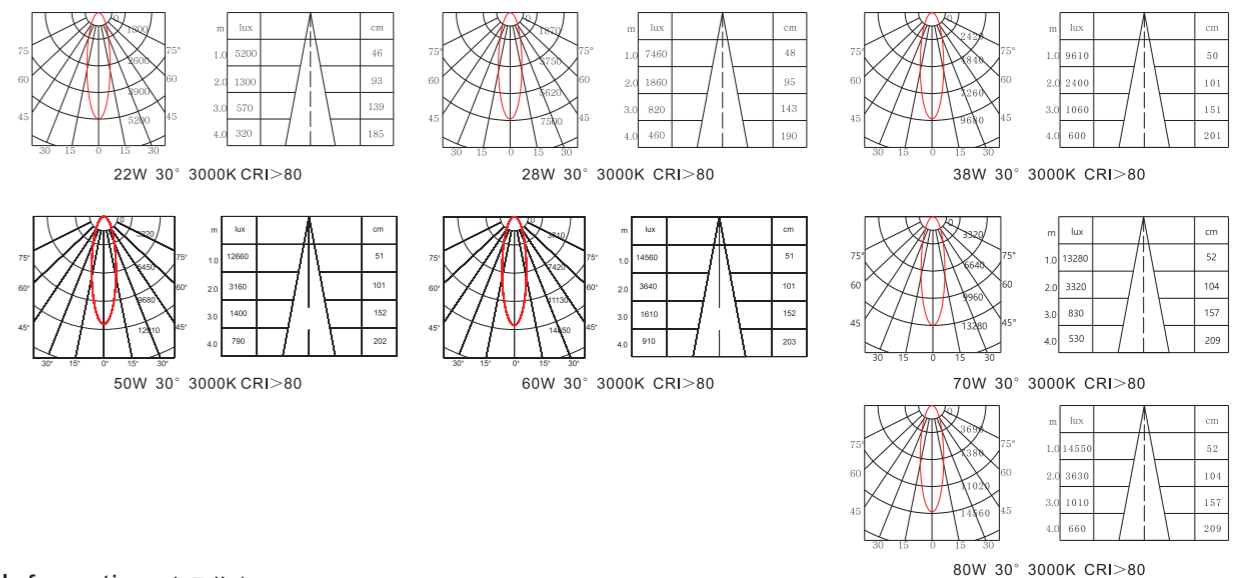

Order Information 产品信息

Model 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC0622A-930XY DLC0622A-930XY	22W	520mA	3000K 4000K	2100lm 2160lm	>90	≥0.95
DLC0628A-930XY DLC0628A-930XY	28W	700mA	3000K 4000K	2800lm 2690lm	>90	≥0.95
DLC0638A-930XY DLC0638A-930XY	38W	900mA	3000K 4000K	3840lm 4160lm	>90	≥0.95
DLC0650A-930XY DLC0650A-930XY	50W	1200mA	3000K 4000K	5070lm 5160lm	>90	≥0.95
DLC0660A-930XY DLC0660A-930XY	60W	1500mA	3000K 4000K	5830lm 5930lm	>90	≥0.95
DLC0670A-930XY DLC0670A-930XY	70W	1700mA	3000K 4000K	5950lm 7000lm	>90	≥0.95
DLC0680A-930XY DLC0680A-930XY	80W	1900mA	3000K 4000K	7268lm 7998lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度, 低色容差SDCM <3, 低光衰, UGR<19
- 高光效, 高照度, 标准的光束角营造舒适的照明环境
- 精心组装和设计, 保证长达40000小时的使用寿命
- 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
- 易于安装, 适用于飞机场, 火车站, 展示厅, 酒店大堂, 办公室, 商场等场所。



MAX 80W



CITIZEN COB

SDCM <3



22W/28W/38W/50W/
60W/70W/80W

CRI >90



AC100-240/220-240V 50/60Hz

25° /32° /45° /50°



φ 175mm

5 YEAR
5 Years Warranty
5年质保


DLC06-B Series

DLC06-B downlights use high quality original CITIZEN COB LED. The general design requirements with two reflector cups, two times optical principle, frosted glass diffuser, pure aluminum heatsink. Many different wattage for options. The max wattage could reach 100W. Glareless, gentle light. Widely to use in industry, high ceiling, high space or glareless requirements exclusive place.


DLC06-B是由金瓦特自主设计研发, 采用纯铝散热器, 总体设计具有两个反光杯, 高效雾面玻璃透光片, 一次光学使用PC反射镜, 反射率>95%, 二次光学采用1090磨砂雾面反光镜, 高品质西铁城光源, 搭配金瓦特高品质外置恒流驱动电源, 可调光, 深度防眩, 散热良好, 质量稳定, 整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

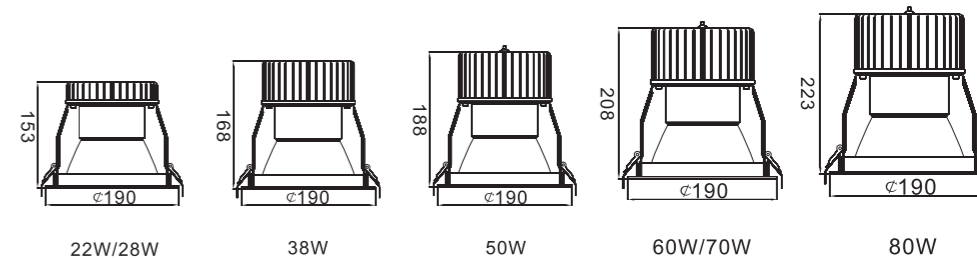

Photometric Diagram 光度分布图

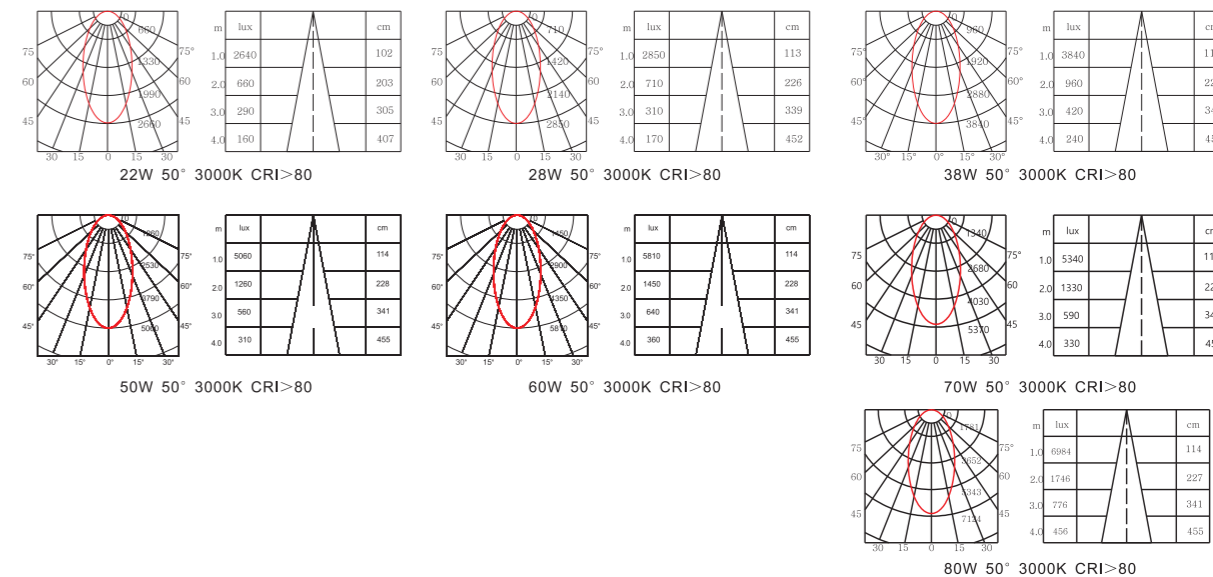

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC0622B-930XY DLC0622B-940XY	22W	520mA	3000K 4000K	25° 2130lm/45° 2130lm/50° 2090lm 25° 2200lm/45° 2200lm/50° 2170lm	>90	≥0.95
DLC0628B-930XY DLC0628B-940XY	28W	700mA	3000K 4000K	25° 2690lm/45° 2640lm/50° 2580lm 25° 2780lm/45° 2740lm/50° 2700lm	>90	≥0.95
DLC0638B-930XY DLC0638B-940XY	38W	900mA	3000K 4000K	25° 3660lm/45° 3610lm/50° 3520lm 25° 4020lm/45° 3810lm/50° 3830lm	>90	≥0.95
DLC0650B-930XY DLC0650B-940XY	50W	1200mA	3000K 4000K	25° 4840lm/45° 4700lm/50° 4570lm 25° 5040lm/45° 4890lm/50° 4790lm	>90	≥0.95
DLC0660B-930XY DLC0660B-940XY	60W	1500mA	3000K 4000K	25° 5570lm/45° 5260lm/50° 5240lm 25° 5790lm/45° 5510lm/50° 5440lm	>90	≥0.95
DLC0670B-930XY DLC0670B-940XY	70W	1700mA	3000K 4000K	32° 5310lm/45° 5180lm/50° 4990lm 32° 6790lm/45° 6560lm/50° 6370lm	>90	≥0.95
DLC0680B-930XY DLC0680B-930XY	80W	1900mA	3000K 4000K	32° 6866lm/45° 6590lm/50° 6180lm 32° 8720lm/45° 8287lm/50° 7849lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度, 低色容差SDCM <3, 低光衰, UGR<19
- 高光效, 高照度, 标准的光束角营造舒适的照明环境
- 精心组装和设计, 保证长达40000小时的使用寿命
- 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
- 易于安装, 适用于飞机场, 火车站, 展示厅, 酒店大堂, 办公室, 商场等场所。



MAX 100W



CITIZEN COB



SDCM < 3



22W/28W/38W/50W/
60W/70W/80W/100W



CRI > 90



AC100-240/220-240V 50/60Hz



45°



φ210mm



5 YEAR
5 Years Warranty
5年质保


DLC08-A Series

DLC08-A downlights use high quality original CITIZEN COB LED. The general design requirements with two reflector cups, two times optical principle, frosted glass diffuser, pure aluminum heatsink. Many different wattage for options. The max wattage could reach 100W. Glareless, gentle light. Widely to use in industry, high ceiling, high space or glareless requirements exclusive place.


DLC08-A是由金瓦特自主设计研发, 采用纯铝散热器, 总体设计具有两个反光杯, 高效雾面玻璃透光片, 一次光学使用PC反射镜, 反射率>95%, 二次光学采用1090电镀镜面反光镜, 高品质西铁城光源, 搭配金瓦特高品质外置恒流驱动电源, 可调光, 深度防眩, 散热良好, 质量稳定, 整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

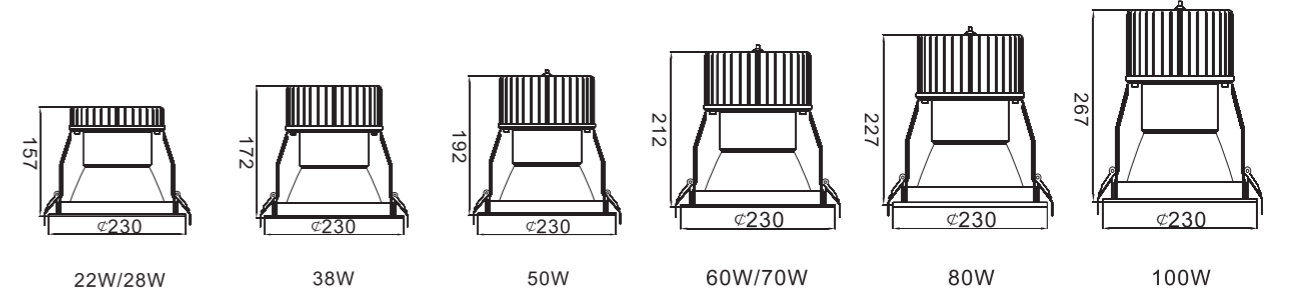

Photometric Diagram 光度分布图

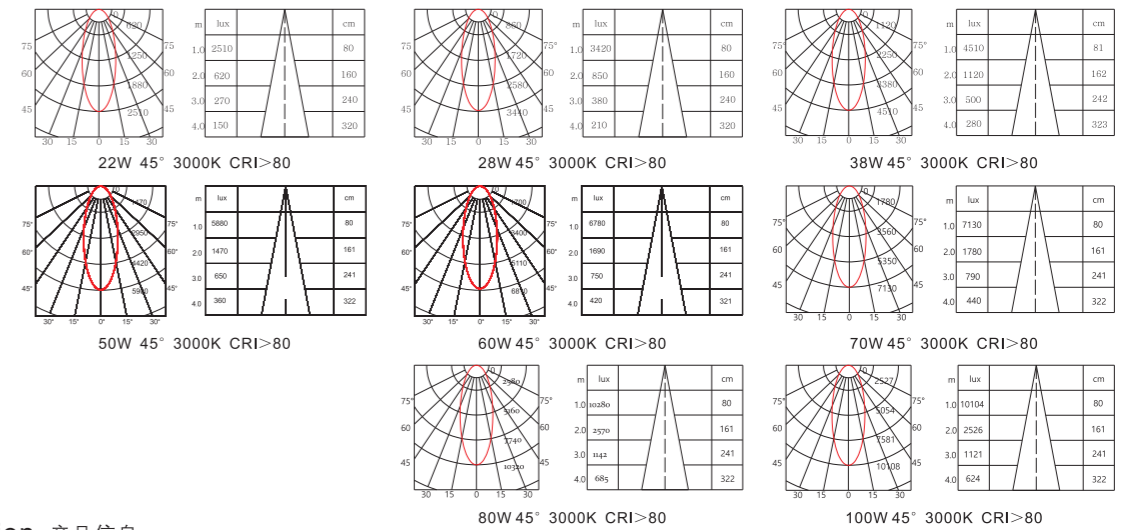

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC0822A-930XY DLC0822A-940XY	22W	520mA	3000K 4000K	1970lm 1950lm	>90	≥0.95
DLC0828A-930XY DLC0828A-940XY	28W	700mA	3000K 4000K	2670lm 2530lm	>90	≥0.95
DLC0838A-930XY DLC0838A-940XY	38W	900mA	3000K 4000K	3540lm 3820lm	>90	≥0.95
DLC0850A-930XY DLC0850A-940XY	50W	1200mA	3000K 4000K	4550lm 4760lm	>90	≥0.95
DLC0860A-930XY DLC0860A-940XY	60W	1500mA	3000K 4000K	5230lm 5460lm	>90	≥0.95
DLC0870A-930XY DLC0870A-940XY	70W	1700mA	3000K 4000K	5580lm 6420lm	>90	≥0.95
DLC0880A-930XY DLC0880A-940XY	80W	1900mA	3000K 4000K	9021lm 9232lm	>90	≥0.95
DLC08100A-930XY DLC08100A-940XY	100W	2400mA	3000K 4000K	8571lm 9171lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度, 低色容差SDCM <3, 低光衰, UGR<19
- 高光效, 高照度, 标准的光束角营造舒适的照明环境
- 精心组装和设计, 保证长达40000小时的使用寿命
- 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
- 易于安装, 适用于飞机场, 火车站, 展示厅, 酒店大堂, 办公室, 商场等场所。



MAX 100W



CITIZEN COB

SDCM <3



22W/28W/38W/50W/
60W/70W/80W/100W

CRI >90



AC100-240/220-240V 50/60Hz

25° /36° /45° /55°



φ210mm

5 YEAR
5 Years Warranty
5年质保


DLC08-B Series

DLC08-B downlights use high quality original CITIZEN COB LED. The general design requirements with two reflector cups, two times optical principle, frosted glass diffuser, pure aluminum heatsink. Many different wattage for options. The max wattage could reach 100W. Glareless, gentle light. Widely to use in industry, high ceiling, high space or glareless requirements exclusive place.


DLC08-B是由金瓦特自主设计研发, 采用纯铝散热器, 总体设计具有两个反光杯, 高效雾面玻璃透光片, 一次光学使用PC反射镜, 反射率>95%, 二次光学采用1090磨砂雾面反光镜, 高品质西铁城光源, 搭配金瓦特高品质外置恒流驱动电源, 可调光, 深度防眩, 散热良好, 质量稳定, 整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

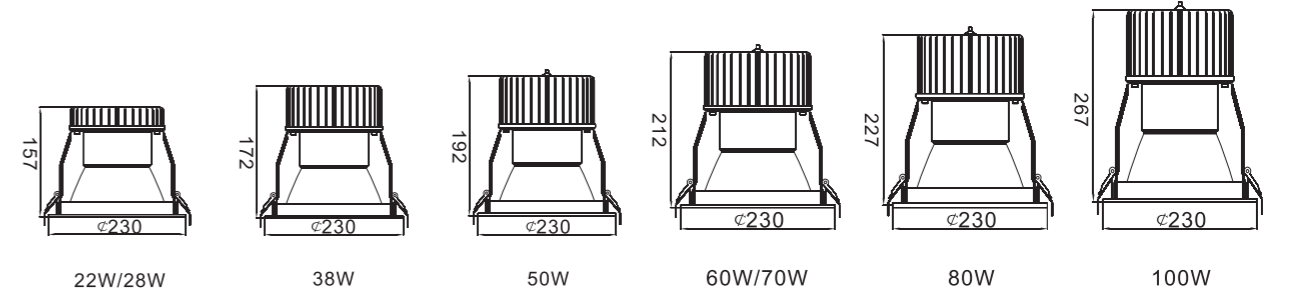

Photometric Diagram 光度分布图

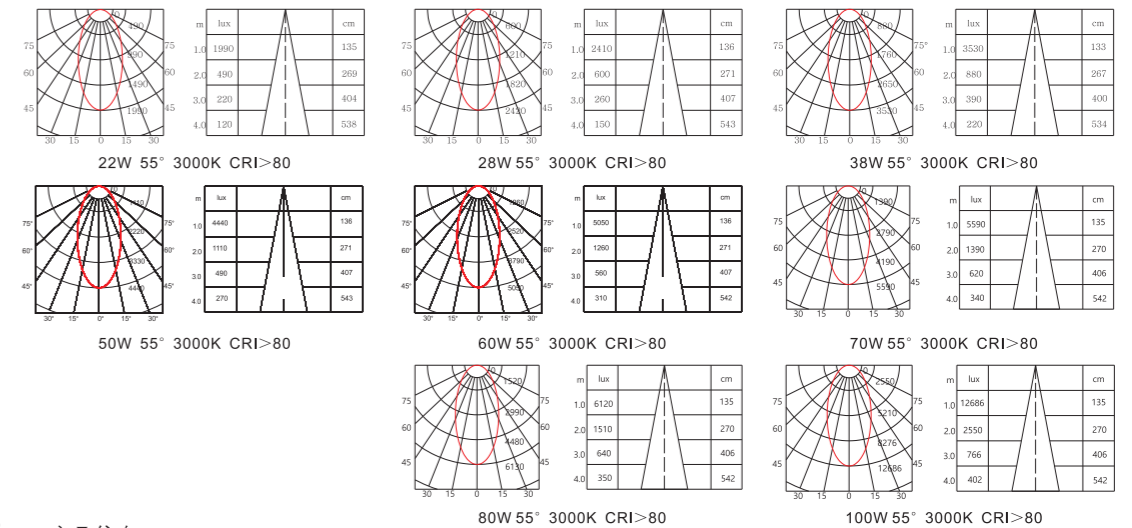

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC0822B-930XY DLC0822B-940XY	22W	520mA	3000K 4000K	25° 2130lm/45° 2110lm/55° 2090lm 25° 2110lm/45° 2100lm/55° 2070lm	>90	≥0.95
DLC0828B-930XY DLC0828B-940XY	28W	700mA	3000K 4000K	25° 2710lm/45° 2570lm/55° 2540lm 25° 2680lm/45° 2680lm/55° 2800lm	>90	≥0.95
DLC0838B-930XY DLC0838B-940XY	38W	900mA	3000K 4000K	25° 3860lm/45° 3700lm/55° 3670lm 25° 4170lm/45° 3780lm/55° 3760lm	>90	≥0.95
DLC0850B-930XY DLC0850B-940XY	50W	1200mA	3000K 4000K	25° 5150lm/45° 4780lm/55° 4720lm 25° 5390lm/45° 4920lm/55° 5040lm	>90	≥0.95
DLC0860B-930XY DLC0860B-940XY	60W	1500mA	3000K 4000K	25° 5690lm/45° 5320lm/55° 5310lm 25° 6210lm/45° 5600lm/55° 5580lm	>90	≥0.95
DLC0870B-930XY DLC0870B-940XY	70W	1700mA	3000K 4000K	25° 5740lm/36° 6090lm/55° 5920lm 25° 6650lm/36° 7040lm/55° 6970lm	>90	≥0.95
DLC0880B-930XY DLC0880B-940XY	80W	1900mA	3000K 4000K	25° 6560lm/36° 7302lm/55° 7108lm 25° 7650lm/36° 8045lm/55° 7965lm	>90	≥0.95
DLC08100B-930XY DLC08100B-940XY	100W	2400mA	3000K 4000K	25° 9160lm/36° 8380lm/55° 9023lm 25° 10956lm/36° 9560lm/55° 10089lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度, 低色容差SDCM <3, 低光衰, UGR<19
- 高光效, 高照度, 标准的光束角营造舒适的照明环境
- 精心组装和设计, 保证长达40000小时的使用寿命
- 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
- 易于安装, 适用于飞机场, 火车站, 展示厅, 酒店大堂, 办公室, 商场等场所。



MAX 100W



CITIZEN COB



SDCM <3



22W/28W/38W/50W/
60W/70W/80W/100W



CRI >90



AC100-240/220-240V 50/60Hz



36°



φ 240mm



5 YEAR
5 Years Warranty
5年质保


DLC10-A Series

DLC10-A downlights use high quality original CITIZEN COB LED. The general design requirements with two reflector cups, two times optical principle, frosted glass diffuser, pure aluminum heatsink. Many different wattage for options. The max wattage could reach 100W. Glareless, gentle light. Widely to use in industry, high ceiling, high space or glareless requirements exclusive place.


DLC10-A是由金瓦特自主设计研发, 采用纯铝散热器, 总体设计具有两个反光杯, 高效雾面玻璃透光片, 一次光学使用PC反射镜, 反射率>95%, 二次光学采用1090电镀镜面反光镜, 高品质西铁城光源, 搭配金瓦特高品质外置恒流驱动电源, 可调光, 深度防眩, 散热良好, 质量稳定, 整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

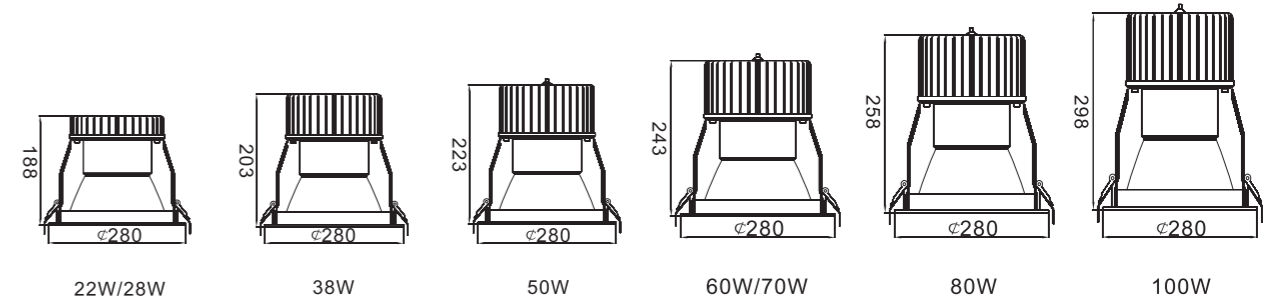

Photometric Diagram 光度分布图

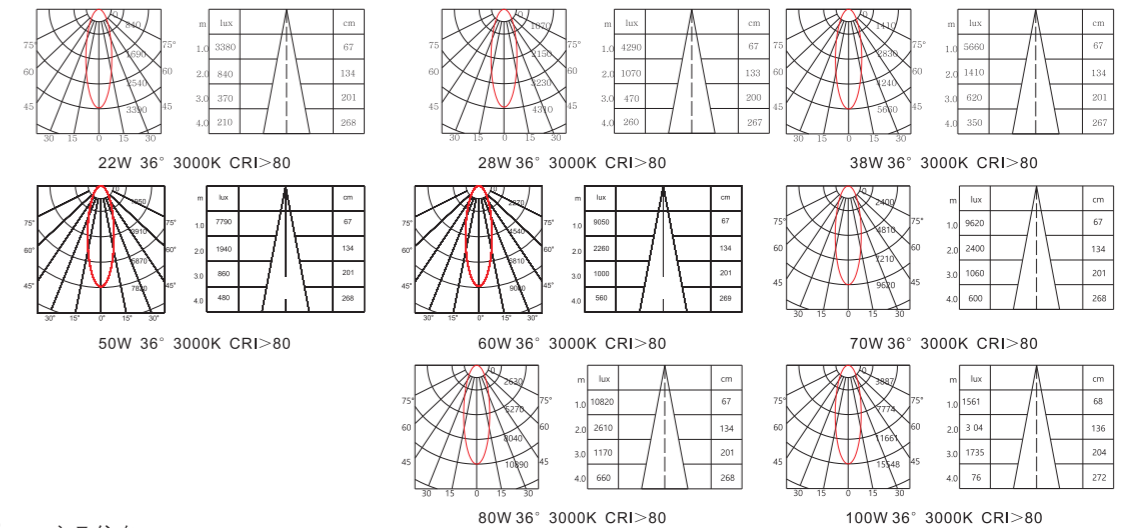

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC1022A-930XY DLC1022A-940XY	22W	520mA	3000K 4000K	1960lm 2050lm	>90	≥0.95
DLC1028A-930XY DLC1028A-940XY	28W	700mA	3000K 4000K	2480lm 2590lm	>90	≥0.95
DLC1038A-930XY DLC1038A-940XY	38W	900mA	3000K 4000K	3230lm 3430lm	>90	≥0.95
DLC1050A-930XY DLC1050A-940XY	50W	1200mA	3000K 4000K	4510lm 4740lm	>90	≥0.95
DLC1060A-930XY DLC1060A-940XY	60W	1500mA	3000K 4000K	5220lm 5380lm	>90	≥0.95
DLC1070A-930XY DLC1070A-940XY	70W	1700mA	3000K 4000K	5570lm 6380lm	>90	≥0.95
DLC1080A-930XY DLC1080A-940XY	80W	1900mA	3000K 4000K	6480lm 6980lm	>90	≥0.95
DLC10100A-930XY DLC10100A-940XY	100W	2400mA	3000K 4000K	8825lm 9166lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度, 低色容差SDCM <3, 低光衰, UGR<19
- 高光效, 高照度, 标准的光束角营造舒适的照明环境
- 精心组装和设计, 保证长达40000小时的使用寿命
- 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
- 易于安装, 适用于飞机场, 火车站, 展示厅, 酒店大堂, 办公室, 商场等场所。



MAX 100W



CITIZEN COB



SDCM <3



22W/28W/38W/50W/
60W/70W/80W/100W



CRI >90



AC100-240/220-240V 50/60Hz



25° /32° /40°



φ 240mm



5 YEAR
5 Years Warranty
5年质保


DLC10-B Series

DLC10-B downlights use high quality original CITIZEN COB LED. The general design requirements with two reflector cups, two times optical principle, frost glass diffuser, pure aluminum heatsink. Many different wattage for options. The max wattage could reach 100W. Glareless, gentle light. Widely to use in industry, high ceiling, high space or glareless requirements exclusive place.


DLC10-B是由金瓦特自主设计研发, 采用纯铝散热器, 总体设计具有两个反光杯, 高效雾面玻璃透光片, 一次光学使用PC反射镜, 反射率>95%, 二次光学采用1090磨砂雾面反光镜, 高品质西铁城光源, 搭配金瓦特高品质外置恒流驱动电源, 可调光, 深度防眩, 散热良好, 质量稳定, 整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

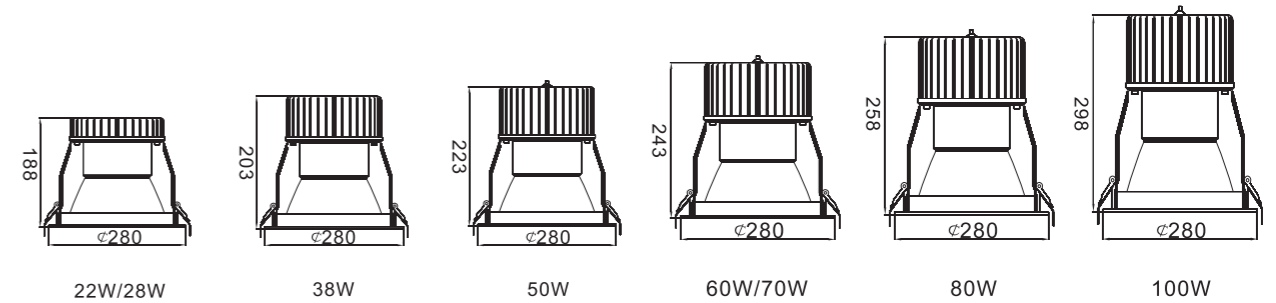

Photometric Diagram 光度分布图

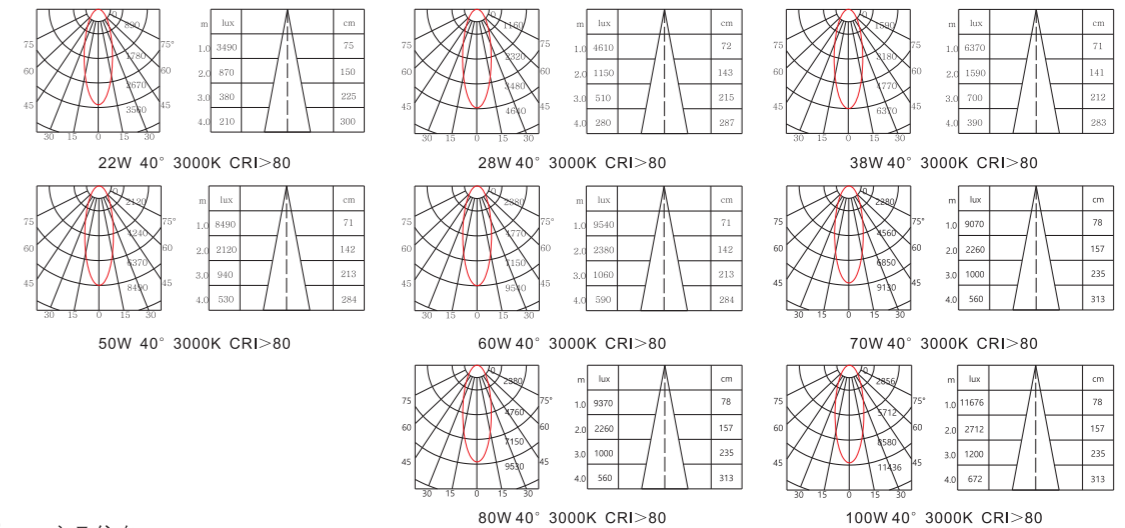

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC1022B-930XY DLC1022B-940XY	22W	520mA	3000K 4000K	25° 2130lm/40° 2120lm 25° 2220lm/40° 2210lm	>90	≥0.95
DLC1028B-930XY DLC1028B-940XY	28W	700mA	3000K 4000K	25° 2730lm/40° 2690lm 25° 2800lm/40° 2800lm	>90	≥0.95
DLC1038B-930XY DLC1038B-940XY	38W	900mA	3000K 4000K	25° 3740lm/40° 3620lm 25° 4160lm/40° 3980lm	>90	≥0.95
DLC1050B-930XY DLC1050B-940XY	50W	1200mA	3000K 4000K	25° 4810lm/40° 4860lm 25° 5220lm/40° 5130m	>90	≥0.95
DLC1060B-930XY DLC1060B-940XY	60W	1500mA	3000K 4000K	25° 5410lm/40° 5470lm 25° 5970lm/40° 5710m	>90	≥0.95
DLC1070B-930XY DLC1070B-940XY	70W	1700mA	3000K 4000K	32° 5710lm/40° 5590lm 32° 6920lm/40° 6820lm	>90	≥0.95
DLC1080B-930XY DLC1080B-940XY	80W	1900mA	3000K 4000K	32° 6825lm/40° 6688lm 32° 7408lm/40° 7294lm	>90	≥0.95
DLC10100B-930XY DLC10100B-940XY	100W	2400mA	3000K 4000K	32° 8506lm/40° 8435lm 32° 9362lm/40° 9258lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, UGR<19
- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac ,0-10v, Dali dimmable is available.
- Easy installation, Widely used in Airport, train station, exhibition center, hotel lobby, office ect.

- 高亮度, 低色容差SDCM <3, 低光衰, UGR<19
- 高光效, 高照度, 标准的光束角营造舒适的照明环境
- 精心组装和设计, 保证长达40000小时的使用寿命
- 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
- 易于安装, 适用于飞机场, 火车站, 展示厅, 酒店大堂, 办公室, 商场等场所。



MAX 100W



CITIZEN COB

SDCM <3



22W/28W/38W/50W/
60W/70W/80W/100W

CRI >90



AC100-240/220-240V 50/60Hz



25° /45° /36° /55° /80°



φ255mm



5 Years Warranty
5年质保

DLC10-D Series


DLC10-D downlights use high quality original CITIZEN COB LED. The general design requirements with two reflector cups, two times optical principle, frost glass diffuser, pure aluminum heatsink. Many different wattage for options. The max wattage could reach 100W. Glareless, gentle light. Widely to use in industry, high ceiling, high space or glareless requirements exclusive place.

DLC10-D是由金瓦特自主设计研发, 采用纯铝散热器, 总体设计采用两个反光杯, 高效雾面玻璃透光片, 一次光学使用PC反射镜, 反射率>95%, 二次光学采用1090磨砂雾面反光镜, 高品质西铁城光源, 搭配金瓦特高品质外置恒流驱动电源, 可调光, 深度防眩, 散热良好, 质量稳定, 整灯寿命超过40,000小时。




Dimensions 产品尺寸

(Unit: mm)

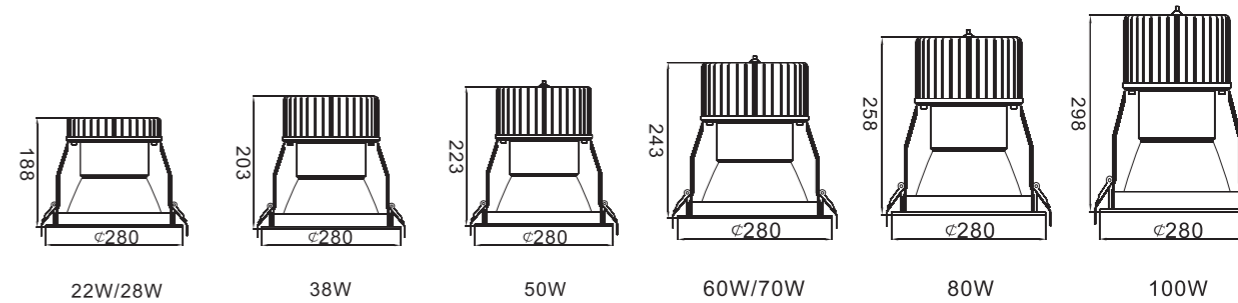

Photometric Diagram 光度分布图

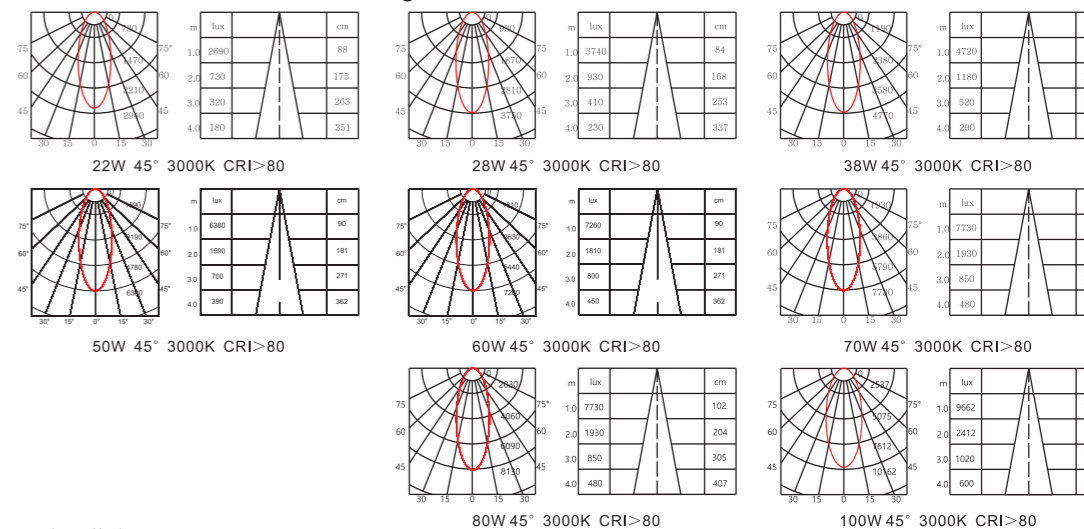

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLC1022D-930XY DLC1022D-940XY	22W	520mA	3000K 4000K	25° 2270lm/45° 2260lm/80° 2300lm 25° 2340lm/45° 2330lm/80° 2390lm	>90	≥0.95
DLC1028D-930XY DLC1028D-940XY	28W	700mA	3000K 4000K	25° 2860lm/45° 2810lm/80° 2860lm 25° 2990lm/45° 2980lm/80° 3020lm	>90	≥0.95
DLC1038D-930XY DLC1038D-940XY	38W	900mA	3000K 4000K	25° 3910lm/45° 3810lm/80° 3920lm 25° 4340lm/45° 4190lm/80° 4320lm	>90	≥0.95
DLC1050D-930XY DLC1050D-940XY	50W	1200mA	3000K 4000K	25° 4760lm/45° 4980lm/80° 5050lm 25° 5550lm/45° 5410lm/80° 5650lm	>90	≥0.95
DLC1060D-930XY DLC1060D-940XY	60W	1500mA	3000K 4000K	25° 5190lm/45° 5660lm/80° 5560lm 25° 6400lm/45° 6100lm/80° 6300lm	>90	≥0.95
DLC1070D-930XY DLC1070D-940XY	70W	1700mA	3000K 4000K	36° 6590lm/45° 6650lm/55° 6680lm/80° 6720lm 36° 7510lm/45° 7160lm/55° 6680lm/80° 7510lm	>90	≥0.95
DLC1080D-930XY DLC1080D-940XY	80W	1900mA	3000K 4000K	36° 7390lm/45° 7240lm/55° 7180lm/80° 7220lm 36° 8010lm/45° 7630lm/55° 7280lm/80° 8010lm	>90	≥0.95
DLC10100D-930XY DLC10100D-940XY	100W	2400mA	3000K 4000K	25° 8510lm/45° 8418lm/80° 8348lm 25° 9010lm/45° 8806lm/80° 8752lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

DIE-CASTING ALUMINIUM DOWNLIGHT SERIES

压铸筒灯系列

Model.型号

DLD04-A
DLD04-B
DLD04-C
DLD06-A
DLD06-B
DLD06-C
DLD08-A
DLD08-B
DLD08-C

Power.功率

16 / 20 / 25W
16 / 20 / 25W
16 / 20 / 25W
18 / 25 / 32W
18 / 25 / 32W
25 / 35W
25 / 32 / 45W
25 / 32 / 45W
25 / 35 / 50 / 55W



Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
- 高亮度, 低色容差SDCM <3, 低光衰
 - 高光效, 高照度, 标准的光束角营造舒适的照明环境
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光 (200-240v输入) 和0-10v可调光 (100-240v输入)
 - 易于安装, 适用于广泛应用
 - 应用于普通照明



SAMSUNG SMD



SDCM <3



16W/20W/25W



CRI >90



AC100-240/220-240V 50/60Hz



87°



φ 125mm



5 YEARS
5 Years Warranty
5年质保


DLD04-A Series

DLD04-A Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness SAMSUNG LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD04-A系列筒灯由金瓦特自主设计研发, 压铸铝外壳, 外表烤漆, 采用高质量1090铝反射器, 反射率>95%, 扩散板透光率>92%, 高亮度三星光源, 搭配金瓦特外置恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。






Dimensions 产品尺寸 (Unit:mm)

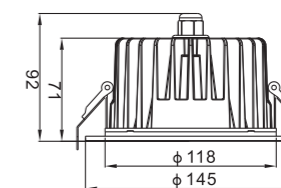

16W/20W/25W

Photometric Diagram 光度分布图

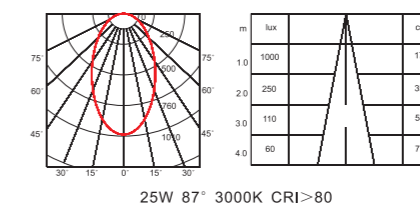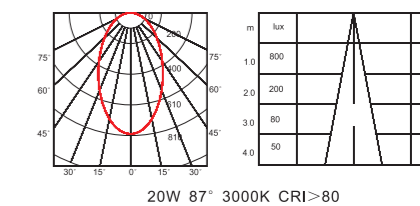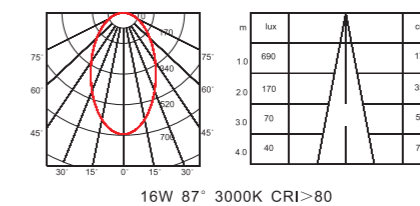

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0416A-930XY DLD0416A-940XY	16W	380mA	3000K 4000K	1420lm 1550lm	>90	≥0.95
DLD0420A-930XY DLD0420A-940XY	20W	480mA	3000K 4000K	1680lm 1800lm	>90	≥0.95
DLD0425A-930XY DLD0425A-940XY	25W	600mA	3000K 4000K	2050lm 2250lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
- 高亮度, 低色容差SDCM <3, 低光衰
 - 高光效, 高照度, 标准的光束角营造舒适的照明环境
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光 (200-240v输入) 和0-10v可调光 (100-240v输入)
 - 易于安装, 适用于广泛应用
 - 应用于普通照明



- SAMSUNG SMD
- SDCM < 3
- 16W/20W/25W
- CRI > 90
- AC100-240/220-240V 50/60Hz
- 84°
- 5 Years Warranty
5年质保
- φ 125mm


DLD04-B Series

DLD04-B Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness SAMSUNG LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD04-B系列筒灯由金瓦特自主设计研发, 压铸铝外壳, 外表烤漆, 采用高质量1090铝反射器, 反射率>95%, 扩散板透光率>92%, 高亮度三星光源, 搭配金瓦特外置恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。




Dimensions 产品尺寸 (Unit: mm)

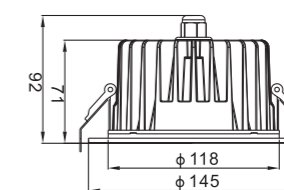

16W/20W/25W

Photometric Diagram 光度分布图

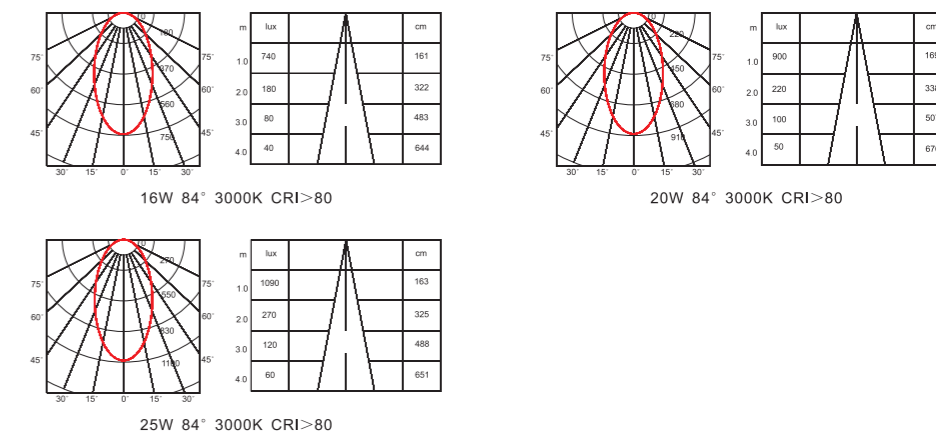

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0416B-930XY DLD0416B-940XY	16W	380mA	3000K 4000K	1280lm 1430lm	>90	≥0.95
DLD0420B-930XY DLD0420B-940XY	20W	480mA	3000K 4000K	1580lm 1700lm	>90	≥0.95
DLD0425B-930XY DLD0425B-940XY	25W	600mA	3000K 4000K	1890lm 2040lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
- 高亮度, 低色容差SDCM <3, 低光衰
 - 高光效, 高照度, 标准的光束角营造舒适的照明环境
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光 (200-240v输入) 和0-10v可调光 (100-240v输入)
 - 易于安装, 适用于广泛应用
 - 应用于普通照明



CITIZEN COB



SDCM <3



15W/20W/25W



CRI >90



AC100-240/220-240V 50/60Hz



27°



φ 125mm



5 YEARS
5 Years Warranty
5年质保


DLD04-C Series

DLD04-C Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness CITIZEN LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD04-C系列筒灯由金瓦特自主设计研发, 压铸铝外壳, 外表烤漆, 采用高质量1090高级铝反射器, 反射率>95%, 扩散板透光率>92%, 高品质西铁城光源, 搭配金瓦特外置恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。




Dimensions 产品尺寸 (Unit:mm)

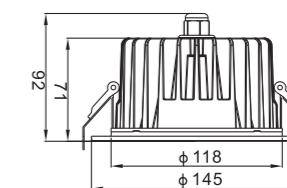

15W/20W/25W

Photometric Diagram 光度分布图

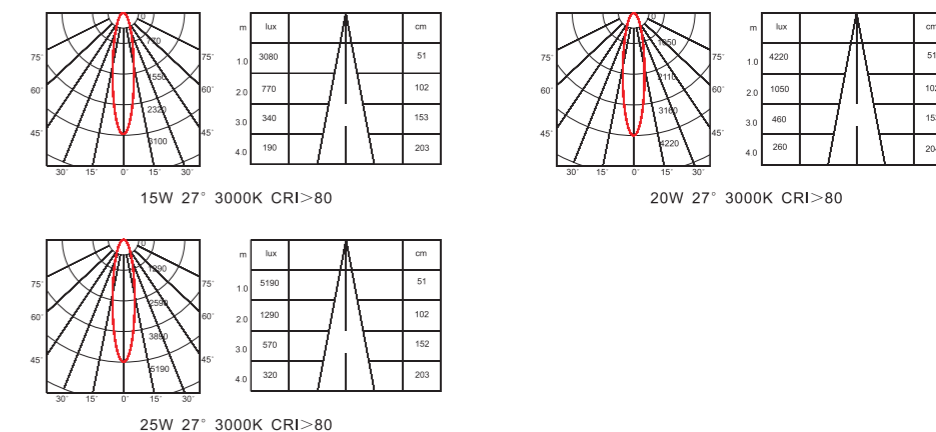

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0415C-930XY DLD0415C-940XY	15W	360mA	3000K 4000K	1490lm 1600lm	>90	≥0.95
DLD0420C-930XY DLD0420C-940XY	20W	480mA	3000K 4000K	2060lm 2130lm	>90	≥0.95
DLD0425C-930XY DLD0425C-940XY	25W	600mA	3000K 4000K	2470lm 2550lm	>90	≥0.95


Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
- 高亮度，低色差SDCM <3，低光衰
 - 高光效，高照度，标准的光束角营造舒适的照明环境
 - 精心组装和设计，保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
 - 易于安装，适用于广泛应用
 - 应用于普通照明




Dimensions 产品尺寸 (Unit: mm)

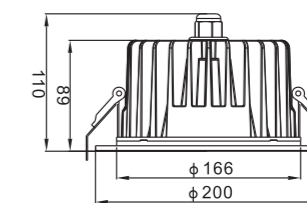

18W/25W/32W

Photometric Diagram 光度分布图

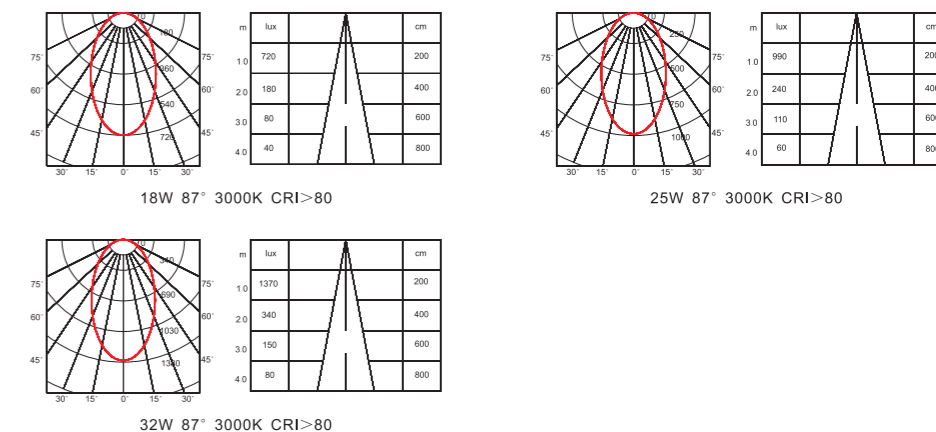

- SAMSUNG SMD
- SDCM < 3
- 18W/25W/32W
- CRI > 90
- AC100-240/220-240V 50/60Hz
- 87°
- ϕ 175mm
- 5 Years Warranty
5年质保

DLD06-A Series

DLD06-A Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness SAMSUNG LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD06-A系列筒灯由金瓦特自主设计研发，压铸铝外壳，外表烤漆，采用高质量1090铝反射器，反射率>95%，扩散板透光率>92%，高亮度三星光源，搭配金瓦特外置恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时以上。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0618A-930XY DLD0618A-940XY	18W	560mA	3000K 4000K	1580lm 1810lm	>90	≥0.95
DLD0625A-930XY DLD0625A-940XY	25W	650mA	3000K 4000K	2180lm 2500lm	>90	≥0.95
DLD0632A-930XY DLD0632A-940XY	32W	750mA	3000K 4000K	3030lm 3150lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
- 高亮度, 低色容差SDCM <3, 低光衰
 - 高光效, 高照度, 标准的光束角营造舒适的照明环境
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光 (200-240v输入) 和0-10v可调光 (100-240v输入)
 - 易于安装, 适用于广泛应用
 - 应用于普通照明



SAMSUNG SMD



SDCM <3



18W/25W/32W



CRI >90



AC100-240/220-240V 50/60Hz



84°



φ 175mm



5 YEARS 5 Years Warranty 5年质保


DLD06-B Series

DLD06-B Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness SAMSUNG LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD06-B系列筒灯由金瓦特自主设计研发, 压铸铝外壳, 外表烤漆, 采用高质量1090铝反射器, 反射率>95%, 扩散板透光率>92%, 高亮度三星光源, 搭配金瓦特外置恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。




Dimensions 产品尺寸 (Unit:mm)

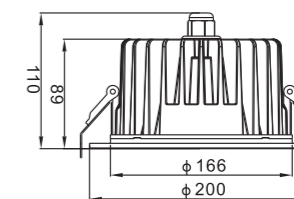

18W/25W/32W

Photometric Diagram 光度分布图

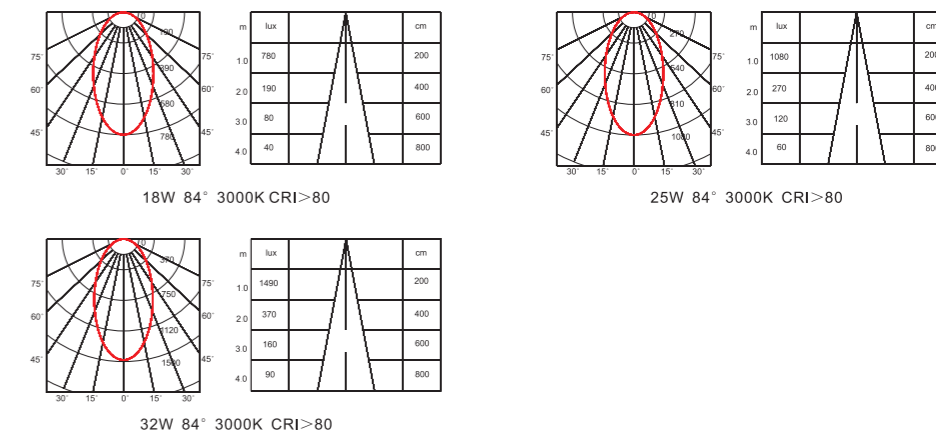

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0618B-930XY DLD0618B-940XY	18W	560mA	3000K 4000K	1450lm 1670lm	>90	≥0.95
DLD0625B-930XY DLD0625B-940XY	25W	650mA	3000K 4000K	2020lm 2300lm	>90	≥0.95
DLD0632B-930XY DLD0632B-940XY	32W	750mA	3000K 4000K	2800lm 3000lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
- 高亮度, 低色容差SDCM <3, 低光衰
 - 高光效, 高照度, 标准的光束角营造舒适的照明环境
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
 - 易于安装, 适用于广泛应用
 - 应用于普通照明



- CITIZEN COB
- SDCM < 3
- 25W/35W
- CRI > 90
- AC100-240/220-240V 50/60Hz
- 27° / 45°
- φ 175mm
- 5 Years Warranty
5年质保


DLD06-C Series

DLD06-C Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness SAMSUNG LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD06-C系列筒灯由金瓦特自主设计研发, 压铸铝外壳, 外表烤漆, 采用高质量1090高级铝反射器, 反射率>95%, 扩散板透光率>92%, 高品质西铁城光源, 搭配金瓦特外置恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。




Dimensions 产品尺寸 (Unit: mm)

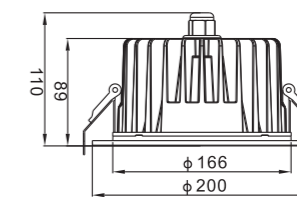

25W/35W

Photometric Diagram 光度分布图

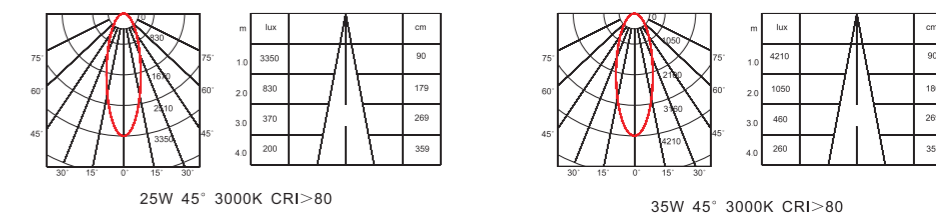

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0625C-930XY DLD0625C-940XY	25W	600mA	3000K 4000K	27° 2740lm/45° 2960lm 27° 2900lm/45° 3100lm	>90	≥0.95
DLD0635C-930XY DLD0635C-940XY	35W	850mA	3000K 4000K	27° 3480lm/45° 3710lm 27° 3740lm/45° 3870lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
- 高亮度, 低色容差SDCM <3, 低光衰
 - 高光效, 高照度, 标准的光束角营造舒适的照明环境
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光 (200-240v输入) 和0-10v可调光 (100-240v输入)
 - 易于安装, 适用于广泛应用
 - 应用于普通照明



SAMSUNG SMD



SDCM <3



25W/32W/45W



CRI >90



AC100-240/220-240V 50/60Hz



87°



φ215mm



5 YEAR 5 Years Warranty 5年质保


DLD08-A Series

DLD08-A Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness SAMSUNG LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD08-A系列筒灯由金瓦特自主设计研发, 压铸铝外壳, 外表烤漆, 采用高质量1090铝反射器, 反射率>95%, 扩散板透光率>92%, 高亮度三星光源, 搭配金瓦特外置恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。




Dimensions 产品尺寸 (Unit:mm)

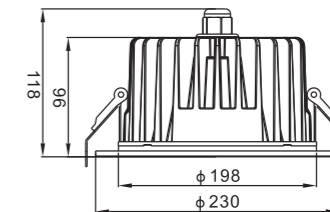

25W/32W/45W

Photometric Diagram 光度分布图

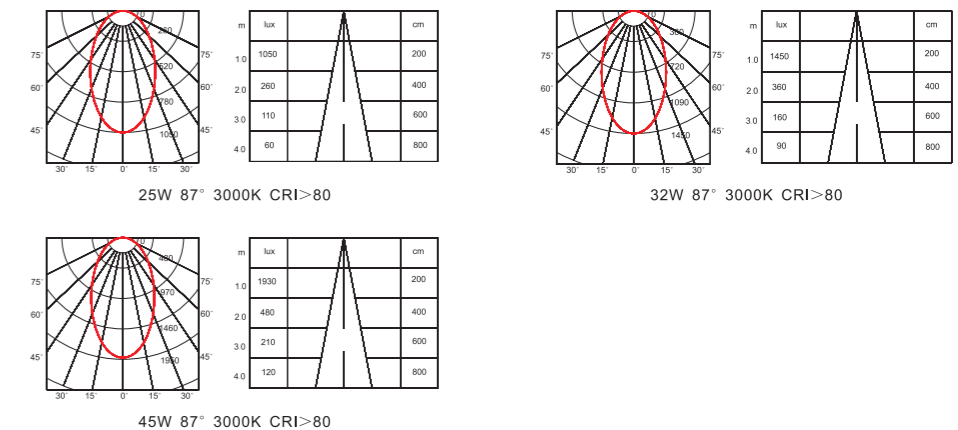

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0825A-930XY DLD0825A-940XY	25W	650mA	3000K 4000K	2190lm 2520lm	>90	≥0.95
DLD0832A-930XY DLD0832A-940XY	32W	750mA	3000K 4000K	3050lm 3280lm	>90	≥0.95
DLD0845A-930XY DLD0845A-940XY	45W	1050mA	3000K 4000K	4080lm 4320lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
- 高亮度, 低色容差SDCM <3, 低光衰
 - 高光效, 高照度, 标准的光束角营造舒适的照明环境
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
 - 易于安装, 适用于广泛应用
 - 应用于普通照明



SAMSUNG SMD



SDCM <3



25W/32W/45W



CRI >90



AC100-240/220-240V 50/60Hz



84°



φ215mm



5 Years Warranty
5年质保


DLD08-B Series

DLD08-B Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness SAMSUNG LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD08-B系列筒灯由金瓦特自主设计研发, 压铸铝外壳, 外表烤漆, 采用高质量1090铝反射器, 反射率>95%, 扩散板透光率>92%, 高亮度三星光源, 搭配金瓦特外置恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。




Dimensions 产品尺寸 (Unit:mm)

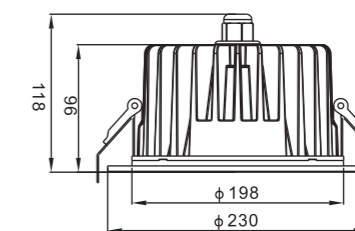

25W/32W/45W

Photometric Diagram 光度分布图

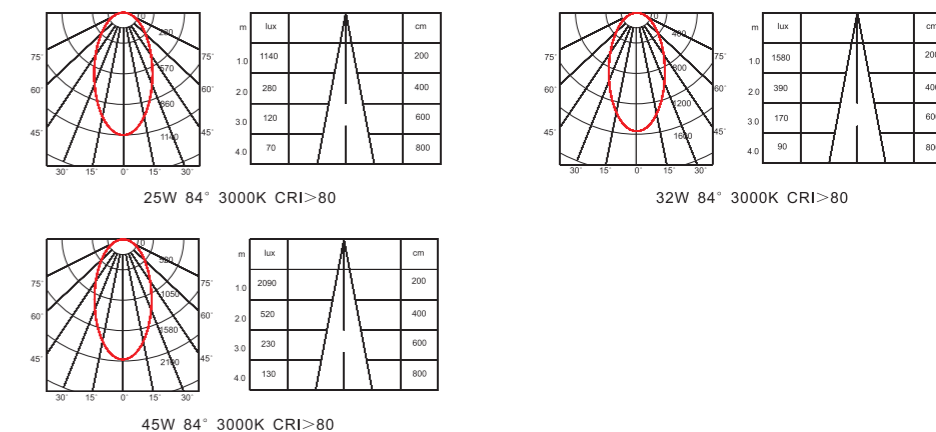

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0825B-930XY DLD0825B-940XY	25W	650mA	3000K 4000K	2130lm 2400lm	>90	≥0.95
DLD0832B-930XY DLD0832B-940XY	32W	750mA	3000K 4000K	2960lm 3160lm	>90	≥0.95
DLD0845B-930XY DLD0845B-940XY	45W	1050mA	3000K 4000K	3910lm 4220lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Triac dimmable and 0-10v dimmable exterior drivers are available.
 - Easy installation, for wide applications
 - For general lighting
-
- 高亮度, 低色容差SDCM <3, 低光衰
 - 高光效, 高照度, 标准的光束角营造舒适的照明环境
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 外置电源可配可控硅调光(200-240v输入)和0-10v可调光(100-240v输入)
 - 易于安装, 适用于广泛应用
 - 应用于普通照明



CITIZEN COB



SDCM <3



25W/35W/50W/55W



CRI >90



AC100-240/220-240V 50/60Hz



27°



φ215mm



5 YEAR 5 Years Warranty 5年质保


DLD08-C Series

DLD08-C Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser,transparent rate>92%,high brightness SAMSUNG LEDs,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLD08-C系列筒灯由金瓦特自主设计研发,压铸铝外壳,外表烤漆,采用高质量1090高级铝反射器,反射率>95%,扩散板透光率>92%,高品质西铁城光源,搭配金瓦特外置恒流驱动电源,可调光,高效率,无频闪,整灯寿命超过40,000小时以上。




Dimensions 产品尺寸 (Unit:mm)

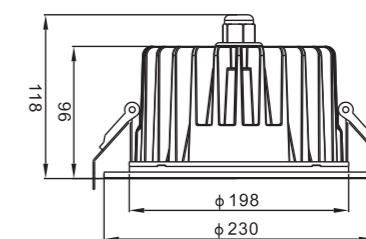

25W/35W/50W/55W

Photometric Diagram 光度分布图

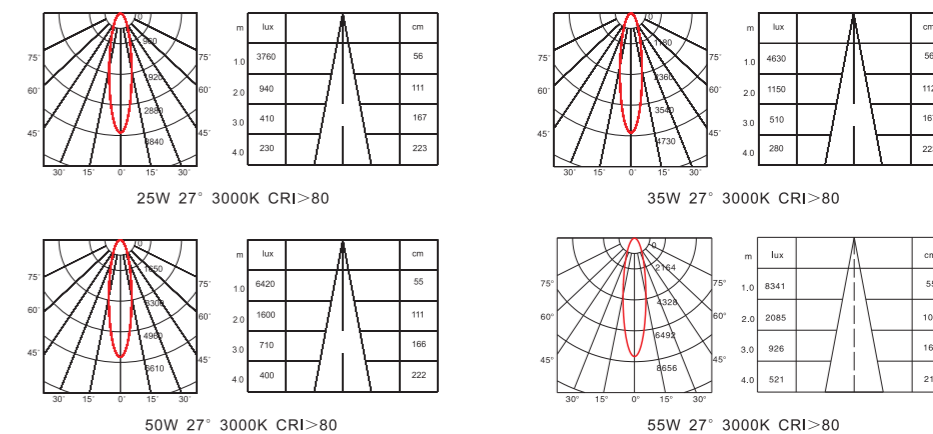

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLD0825C-930XY DLD0825C-940XY	25W	600mA	3000K 4000K	2970lm 3110lm	>90	≥0.95
DLD0835C-930XY DLD0835C-940XY	35W	850mA	3000K 4000K	3660lm 3850lm	>90	≥0.95
DLD0850C-930XY DLD0850C-940XY	50W	1200mA	3000K 4000K	4990lm 5250lm	>90	≥0.95
DLD0855C-930XY DLD0855C-940XY	55W	1300mA	3000K 4000K	6530lm 6232lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

355° ROTATABLE DOWNLIGHT SERIES

355° 转动头系列筒灯

Model.型号

DLE06

Power.功率


35 / 40 / 45 / 50 / 55W



Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac dimmable and 0-10v dimmable exterior drivers are available.
- 25° in right and left
- Easy installation, for wide applications

- 高亮度，低色容差SDCM <3，低光衰
- 高光效，高照度，标准的光束角营造舒适的照明环境
- 精心组装和设计，保证长达40000小时的使用寿命
- 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
- 左右旋转25°
- 易于安装，适用于广泛应用

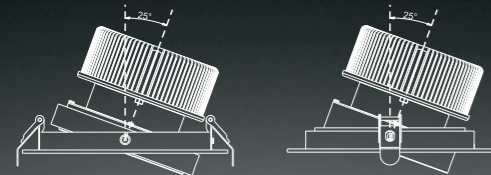

CITIZEN COB



SDCM < 3



35W / 40W / 50W / 55W



CRI > 90



AC100-240/220-240V 50/60Hz



15° / 24° / 36°
45° / 55°



φ 175mm



5 YEAR
5 Years Warranty
5年质保


DLE06 Series

DLE06 Series are originally researched and developed by KWT, pure aluminum housing, anodized finish, use PC reflector, mirror-finish anodized, reflective rate>95% high grade glass, transparent rate>93%, top quality CITIZEN COB, with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLE06系列由金瓦特自主研发，6063纯铝外壳，喷涂氧化处理，PC反射器，镜面阳极氧化处理，反光率>95%高档玻璃，透光率>93%，高品质西铁城光源，搭配金瓦特外置恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时以上。




Dimensions 产品尺寸 (Unit: mm)

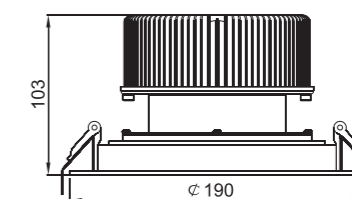


35W/40W/50W/55W


Photometric Diagram 光度分布图

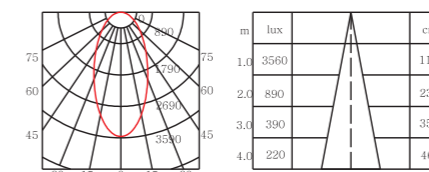


35W 55° 3000K CRI>80

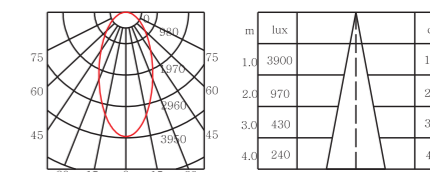

40W 55° 3000K CRI>80

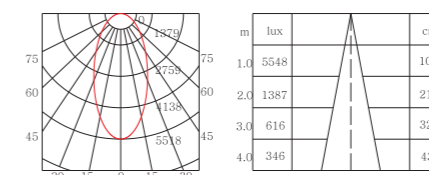

50W 55° 3000K CRI>80

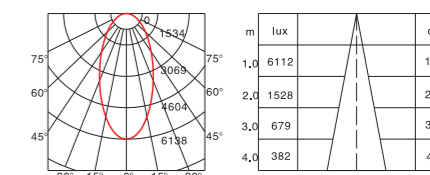

55W 55° 3000K CRI>80

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLE0635-930XY DLE0635-940XY	35W	850mA	3000K 4000K	3963lm 4237lm	>90	≥0.95
DLE0640-930XY DLE0640-940XY	40W	960mA	3000K 4000K	4982lm 4729lm	>90	≥0.95
DLE0650-930XY DLE0650-940XY	50W	1200mA	3000K 4000K	5630lm 5860lm	>90	≥0.95
DLE0655-930XY DLE0655-940XY	55W	1300mA	3000K 4000K	6070lm 6250lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

GIMBAL DOWNLIGHT SERIES

象鼻灯系列

Model.型号

DLG
DLG

Power.功率

9 W / 15W / 30W / 40W
50W




Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac dimmable and 0-10v dimmable exterior drivers are available.
- The lamp turn round 355° in horizontal, 25° in right and left
- Easy installation, for wide applications


- 高亮度，低色容差SDCM <3，低光衰
- 高光效，高照度，标准的光束角营造舒适的照明环境
- 精心组装和设计，保证长达40000小时的使用寿命
- 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
- 在水平方向355°旋转，左右旋转25°
- 易于安装，适用于广泛应用



Dimensions 产品尺寸 (Unit: mm)

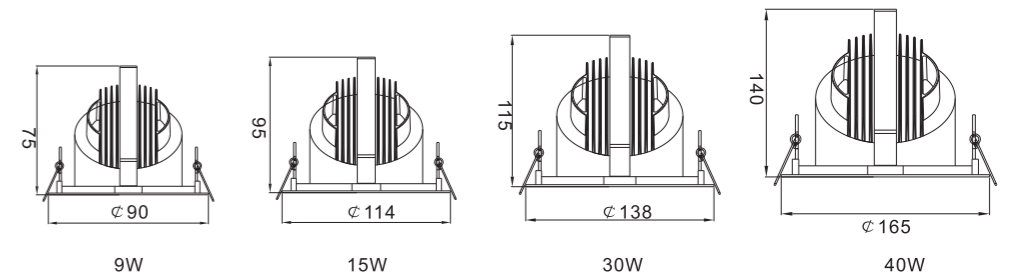

Photometric Diagram 光度分布图

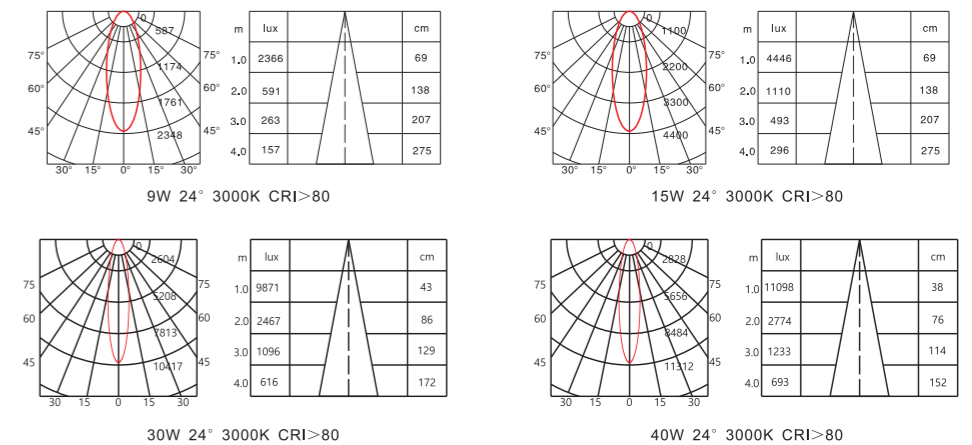

- CITIZEN COB
- SDCM < 3
- 9W/15W/30W/40W
- CRI > 90
- AC100-240/220-240V 50/60Hz
- 15° / 24° / 38° / 45°
- φ 75 / φ 100 / φ 128 / φ 155
- 5 Years Warranty
5年质保

DLG Series

DLG Series are originally researched and developed by KWT, pure aluminum housing, anodized finish, use PC reflector, mirror-finish anodized, reflective rate>95% high grade glass, transparent rate>93%, top quality CITIZEN COB, with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.

DLG系列由金瓦特自主研发，压铸铝外壳，喷涂氧化处理，PC反射器，镜面阳极氧化处理反光率>95%，高档玻璃透光率>93%，高品质西铁城光源，搭配金瓦特外置恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时以上。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLG7509-C930XY DLG7509-C940XY	9W	220mA	3000K 4000K	793lm 820lm	>90	≥0.9
DLG10015-C930XY DLG10015-C940XY	15W	360mA	3000K 4000K	1489lm 1538lm	>90	≥0.9
DLG13030-C930XY DLG13030-C940XY	30W	720mA	3000K 4000K	3170lm 3316lm	>90	≥0.95
DLG15540-C930XY DLG15540-C940XY	40W	940mA	3000K 4000K	4076lm 4620lm	>90	≥0.95









Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 40,000 hours
- Triac dimmable and 0-10v dimmable exterior drivers are available.
- The lamp turn round 355° in horizontal, 25° in right and left
- Easy installation, for wide applications

- 高亮度，低色容差SDCM <3，低光衰
- 高光效，高照度，标准的光束角营造舒适的照明环境
- 精心组装和设计，保证长达40000小时的使用寿命
- 外置电源可配可控硅调光（200-240v输入）和0-10v可调光（100-240v输入）
- 在水平方向355° 旋转，左右旋转25°
- 易于安装，适用于广泛应用



-  CITIZEN COB
-  SDCM < 3
-  50W
-  CRI > 90
-  AC100-240/220-240V 50/60Hz
-  15° / 24° / 38° / 60°
-  φ 175mm
-  5 Years Warranty
5年质保


DLG Series

DLG Series are originally researched and developed by KWT, pure aluminum housing, anodized finish, use PC reflector, mirror-finish anodized, reflective rate>95% high grade glass, transparent rate>93% , top quality CITIZEN COB, with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.


DLG系列由金瓦特自主研发，压铸铝外壳，喷涂氧化处理，PC反射器，镜面阳极氧化处理反光率>95%，高档玻璃透光率>93%，高品质西铁城光源，搭配金瓦特外置恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时以上。



Dimensions 产品尺寸 (Unit: mm)

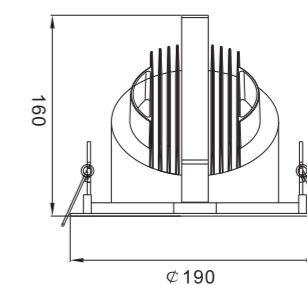

Photometric Diagram 光度分布图

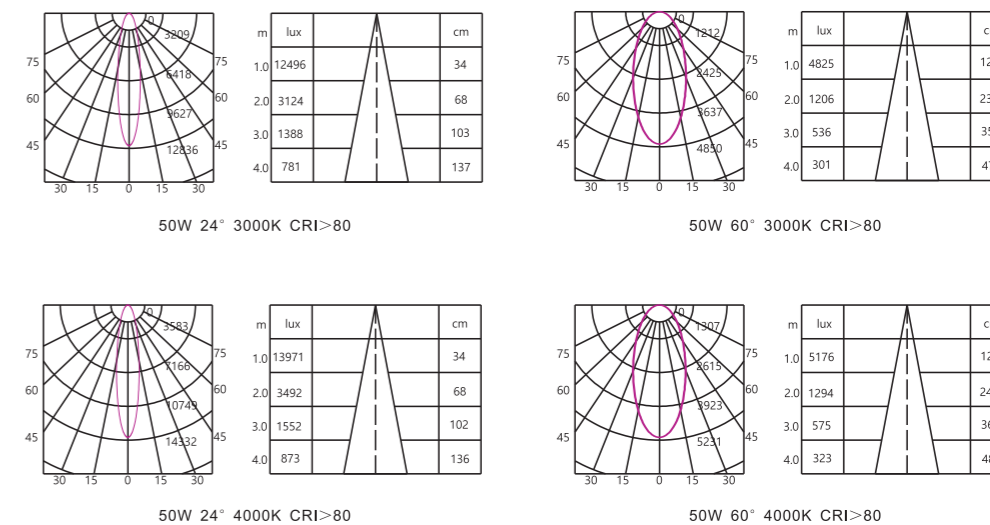

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLG17550-C930XY	50W	1200mA	3000K	4916lm	>90	≥0.95
DLG17550-C940XY			4000K	5465lm		

Remark 备注: X=F(ON-OFF) X=A(1-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

ECONOMIC DOWNLIGHT SERIES

经济型筒灯系列

Model.型号

DLT02
DLT03 / 05 / 06
DLT08

Power.功率

3 / 5 / 7W
10 / 15 / 20W
25 / 30 / 45W



Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 30,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Easy installation, for wide applications
- For general lighting

- 高亮度，低色容差SDCM小于3，光衰低
- 高光效，高光通量，精准的发光角度营造舒适的光环境
- 精准的结构设计，保证了灯具寿命超过30,000小时
- 外置可调光（输入电压200-240V）和0-10V（输入电压100-240V）驱动可选
- 安装简易，广泛适用
- 适合普通照明



San'an COB



SDCM < 3



3W/5W/7W



CRI > 90



45°



φ 75mm



AC100-240/220-240V 50/60Hz



3 YEARS
3 Years Warranty
3年质保


DLT02 Series

DLT02 Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser, transparent rate>92%,high brightness COB,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.


DLT02系列是金瓦特自主研发，压铸铝套件，表面烤漆，1090压铸反光杯，反射率95%，优质扩散板，透光率高达92%，高亮度COB光源，配置金瓦特外置恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过30,000小时。



Dimensions 产品尺寸 (Unit: mm)

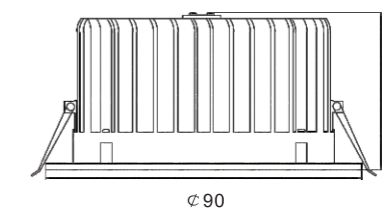

Photometric Diagram 光度分布图

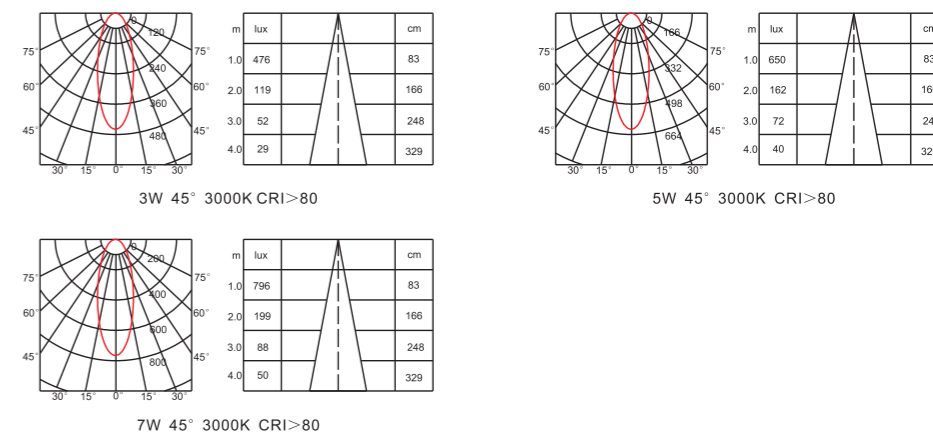

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLT0203-C930XY	3W	260mA	3000K	317lm	>90	≥0.9
DLT0205-C930XY	5W	280mA	3000K	442lm	>90	≥0.9
DLT0207-C930XY	7W	280mA	3000K	522lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 30,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Easy installation, for wide applications
- For general lighting

- 高亮度，低色容差SDCM小于3，光衰低
- 高光效，高光通量，精准的发光角度营造舒适的光环境
- 精准的结构设计，保证了灯具寿命超过30,000小时
- 外置可调光（输入电压200-240V）和0-10V（输入电压100-240V）驱动可选
- 安装简易，广泛适用
- 适合普通照明



San'an COB



SDCM < 3



10W/15W/20W



CRI > 90



90° / 120°



φ95/φ145/φ170mm



AC100-240/220-240V 50/60Hz



3 Years Warranty
3年质保




DLT03/05/06 Series

DLT03/05/06 Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser, transparent rate>92%,high brightness COB,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.




DLT03/05/06系列是金瓦特自主研发，压铸铝套件，表面烤漆，1090压铸反光杯，反射率95%，优质扩散板，透光率高达92%，高亮度COB光源，配置金瓦特外置恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过30,000小时。



Dimensions 产品尺寸 (Unit: mm)



Photometric Diagram 光度分布图

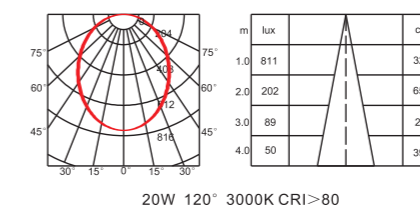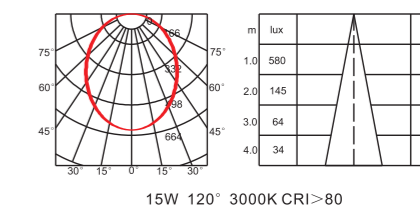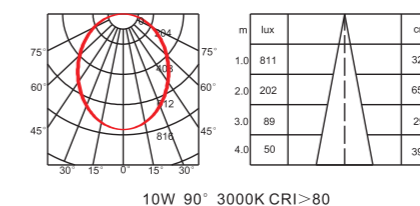

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLT0310-930XY	10W	300mA	3000K	839lm	>90	≥0.9
DLT0515-930XY	15W	300mA	3000K	1649lm	>90	≥0.9
DLT0620-930XY	20W	600mA	3000K	2158lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 30,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Easy installation, for wide applications
- For general lighting

- 高亮度，低色容差SDCM小于3，光衰低
- 高光效，高光通量，精准的发光角度营造舒适的光环境
- 精准的结构设计，保证了灯具寿命超过30,000小时
- 外置可调光（输入电压200-240V）和0-10V（输入电压100-240V）驱动可选
- 安装简易，广泛适用
- 适合普通照明



San'an COB



SDCM < 3



25W/30W/45W



CRI > 90



90° / 110°



φ 205mm



AC100-240/220-240V 50/60Hz



3 YEARS
3 Years Warranty
3年质保


DLT08 Series

DLT08 Series are originally researched and developed by KWT, die-casting aluminum housing, baking finished surface, use 1090 aluminum reflector, reflective rate>95%,high-grade diffuser, transparent rate>92%,high brightness COB,with KWT high quality exterior driver, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.


DLT08系列是金瓦特自主研发，压铸铝套件，表面烤漆，1090压铸反光杯，反射率95%，优质扩散板，透光率高达92%，高亮度COB光源，配置金瓦特外置恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过30,000小时。



Dimensions 产品尺寸 (Unit: mm)

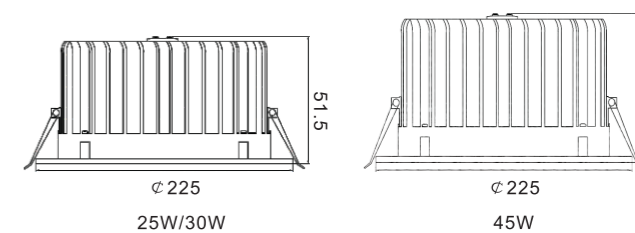

Photometric Diagram 光度分布图

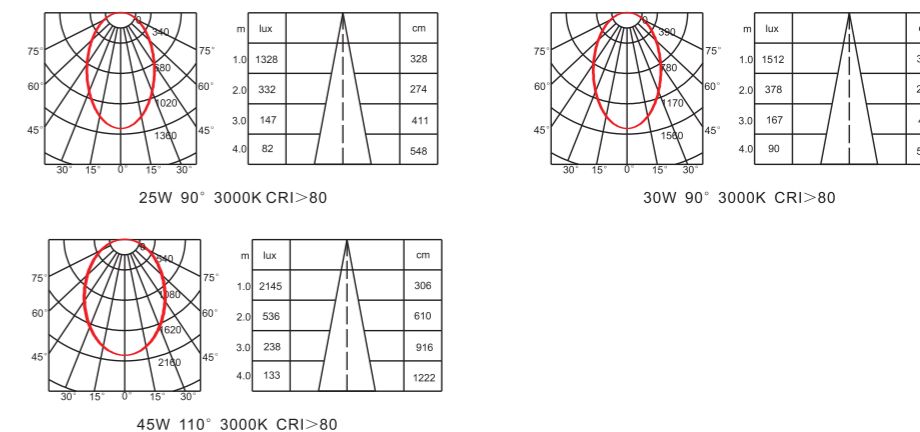

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
DLT0825-930XY	25W	750mA	3000K	2797lm	>90	≥0.9
DLT0830-930XY	30W	900mA	3000K	3189lm	>90	≥0.9
DLT0845-930XY	45W	1350mA	3000K	4548lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

MINI DOWNLIGHT SERIES

迷你筒灯系列

Model.型号

RC40
RC60

Power.功率

3 / 5 / 7W
10 / 12W



Advantages 产品优势

- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
 - Small-sized, graceful and delicate appearance
 - Exterior driver triac dimmable (200-240v input)
 - Refined components and design, guarantee a long life span of over 40,000 hours
- 高光效, 高照度, 准确的光束角使照明氛围更加舒适
 - 外观小巧优雅
 - 外置电源三端双向可控可调光 (200-240V输入)
 - 精密元件设计, 整灯寿命超过40,000小时以上



CITIZEN COB



SDCM <3



3W



CRI >90



12°



φ40mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保


RC40 Series

RC40 Series originally researched and developed by KWT, high-rank aluminum integrated heat sink. baking finished surface, fashionable and special appearance, top quality CITIZEN COB, KWT exclusive exterior driver of super quality, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.


RC40系列是金瓦特自主研发, 使用高级铝一体化散热器, 表面烤漆, 拥有时尚独特的外观, 高品质的西铁城光源, 搭配金瓦特外置恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。



Dimensions 产品尺寸 (Unit: mm)

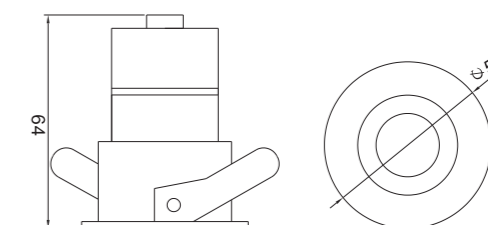

Photometric Diagram 光度分布图

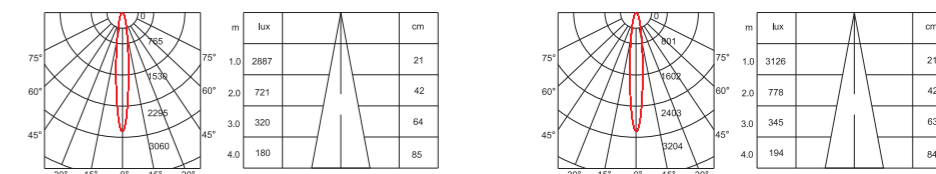

3W 12° 3000K CRI>80

3W 12° 4000K CRI>80

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC4003-930XY	3W	700mA	3000K	189lm	>90	≥0.9
RC4003-940XY	3W	700mA	4000K	226lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) Y=B(Black) Y=W(White)

Advantages 产品优势

- High efficacy, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Small-sized, graceful and delicate appearance
- Rotatable 30° to right and to left
- Exterior driver triac dimmable (200-240v input)
- Refined components and design, guarantee a long life span of over 40,000 hours

- 高光效，高照度，准确的光束角使照明氛围更加舒适
- 外观小巧优雅
- 可左右旋转30°
- 外置电源三端双向可控可调光（200-240V输入）
- 精密元件设计，整灯寿命超过40,000小时以上



CITIZEN COB



SDCM <3



6W



CRI >90



20° /30°



φ 60mm



AC100-240/220-240V 50/60Hz



5 YEAR 5 Years Warranty 5年质保


RC60 Series

RC60 Series originally researched and developed by KWT, high-rank aluminum integrated heat sink, baking finished surface, fashionable and special appearance, can be left and right spiral 0-30°, top quality CITIZEN COB, KWT exclusive exterior driver of super quality, dimmable, good heat sink, brilliant quality, more than 40,000 hours life span.


RC60系列是金瓦特自主研发，使用高级铝一体化散热器，表面烤漆，拥有时尚独特的外观，可左右旋转0-30°，高品质的西铁城光源，搭配金瓦特外置恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时以上。



Dimensions 产品尺寸 (Unit: mm)

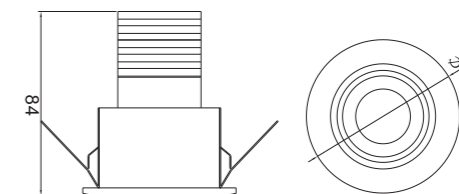

Photometric Diagram 光度分布图

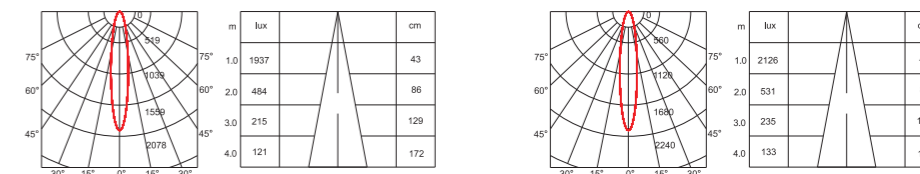

6W 20° 3000K CRI>80

6W 20° 4000K CRI>80

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC6006-930XY	6W	135mA	3000K	20° 474lm/30° 501lm	>90	≥0.9
RC6006-940XY	6W	135mA	4000K	20° 498lm/30° 530lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) Y=B(Black) Y=W(White)

2019 NEW DOWNLIGHT SERIES

2019新款筒灯系列

Model.型号

RCE
DLS
DLW
DWW
SD04

Power.功率

11 / 15 W
12 / 22 / 32 / 42 W
12 / 22 / 32 / 42 W
12 / 22 / 32W
8W




Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline, IP54
- High efficiency, high illuminance, accurate beam angle makes comfortable illumination atmosphere
- Refined components and design, guarantee a long life span of over 30,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Easy installation, for wide applications
- For general lighting

- 高亮度, 低色容差SDCM小于3, 光衰低, 防护等级IP54
- 高光效, 高光通量, 精准的发光角度营造舒适的光环境
- 精准的结构设计, 保证了灯具寿命超过30,000小时
- 外置可调光 (输入电压200-240V) 和0-10V (输入电压100-240V) 驱动可选
- 安装简易, 广泛适用
- 适合普通照明



Dimensions 产品尺寸 (Unit: mm)

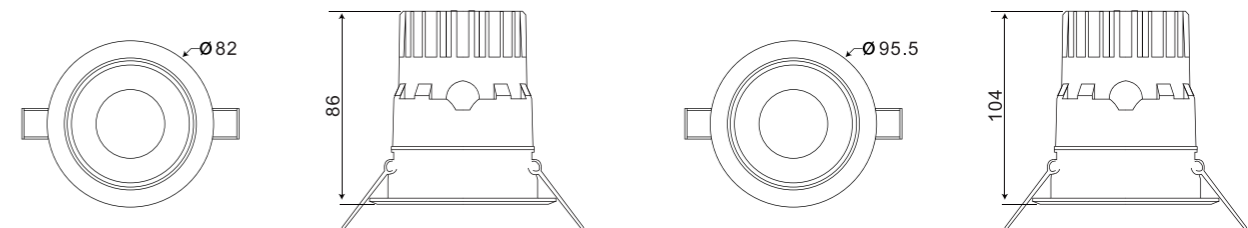

CITIZEN COB



SDCM < 3



11W / 15W



CRI > 90



15°/24°/36°/45°/55° (11W)
18°/24°/36°/50°/60° (15W)



φ 75 / φ 90mm




AC100-240/220-240V 50/60Hz



5 YEAR 5 Years Warranty
5年质保

Photometric Diagram 光度分布图

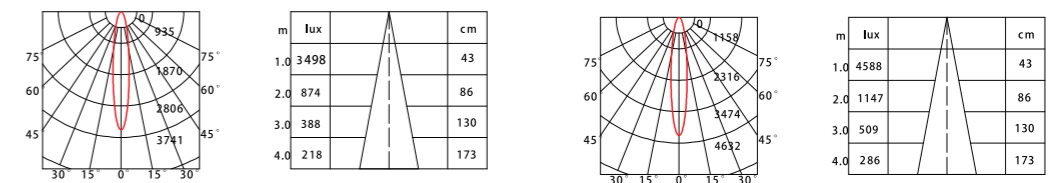

11W 24° 3000K CRI>90

15W 24° 3000K CRI>90

RCE Series

RCE series LED Downlight: RCE Series originally researched and developed KWT. 82mm diameter round face cover, use international top COB CITIZEN chip, and various beam angle 15°, 24°, 36°, 45°, 55° for option brilliant quality, anti-glare design with various free replacement accessories, non-flicker driver, triac dimmable and 0-10V dimmable to fit different dimming system, more than 50,000 hours life span, 5 years warranty.

RCE系列是KWT自主研发的82MM圆形酒店筒灯, 采用西铁城光源, 15° 24° 36° 45° 55° 各种光束角可选, 防眩光设计; 各种配件更换方便, 可选配无频闪不调光电源; 可控硅调光电源以及0-10V调光电源, 适合不同的调光系统, 50000小时寿命, 5年保修。

Order Information 产品信息


Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
RC7511E-C927XY	11W	300mA	2700K	15° 764lm/24° 927lm/36° 945lm	>90	≥0.95
RC7511E-C930XY			3000K	15° 785lm/24° 948lm/36° 961lm		
RC7511E-C940XY			4000K	15° 796lm/24° 969lm/36° 982lm		
RC7515E-C927XY	15W	350mA	2700K	18° 1310lm/24° 1289lm/36° 1269lm	>90	≥0.95
RC7515E-C930XY			3000K	18° 1330lm/24° 1313lm/36° 1298lm		
RC7515E-C940XY			4000K	18° 1354lm/24° 1335lm/36° 1326lm		

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- One unit piece for light fixture up to IP44 protection rate
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 一体式灯体设计，防护等级高达IP44
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



CITIZEN COB



SDCM <3



12W/22W/32W/42W



CRI >90



55°



110x110/135x135/155x155/185x185mm



AC100-240/220-240V 50/60Hz




5 YEAR WARRANTY
5年质保


DLS Series

DLS Series downlight too meet all applications includes Hotel, Shopping Mall , Hospital , Metro Station ,Apartment etc . Glare free UGR<19 . No flickery , 5 Years warranty for options . Life time over 50,000hrs .Operation temperature -25℃-+50℃.


DLS 系列筒灯可广泛应用于酒店，商场，医院，地铁，火车站等。防眩光设计，无频闪，5年质保。寿命长达50000小时，工作温度-25℃-+50℃。

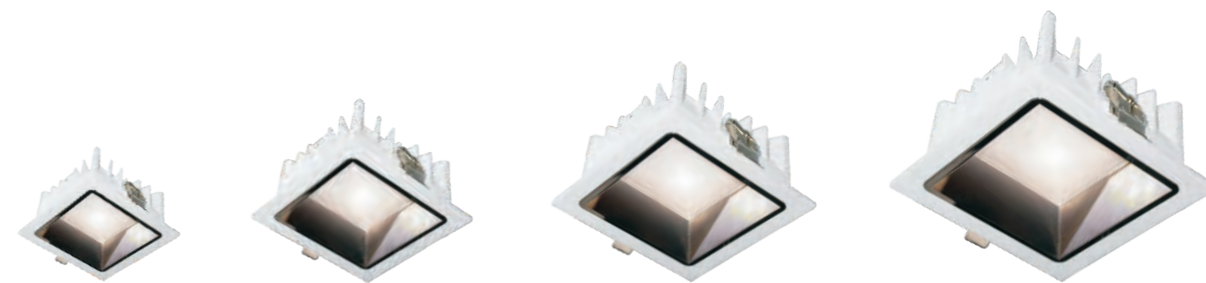

Dimensions 产品尺寸 (Unit: mm)

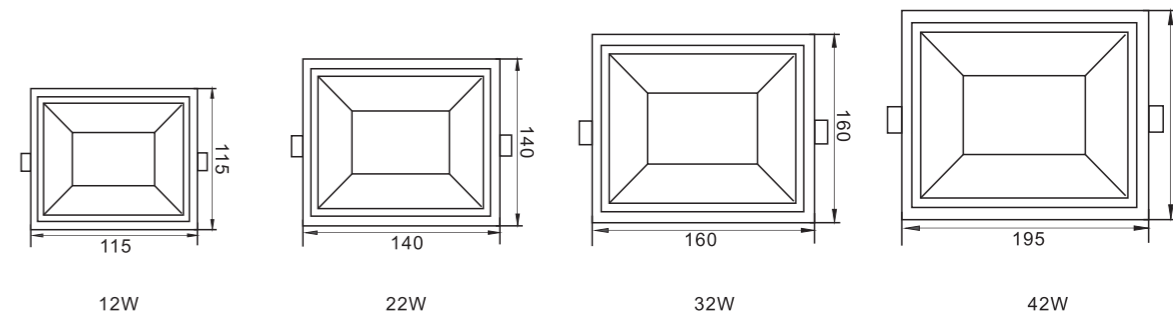

Photometric Diagram 光度分布图

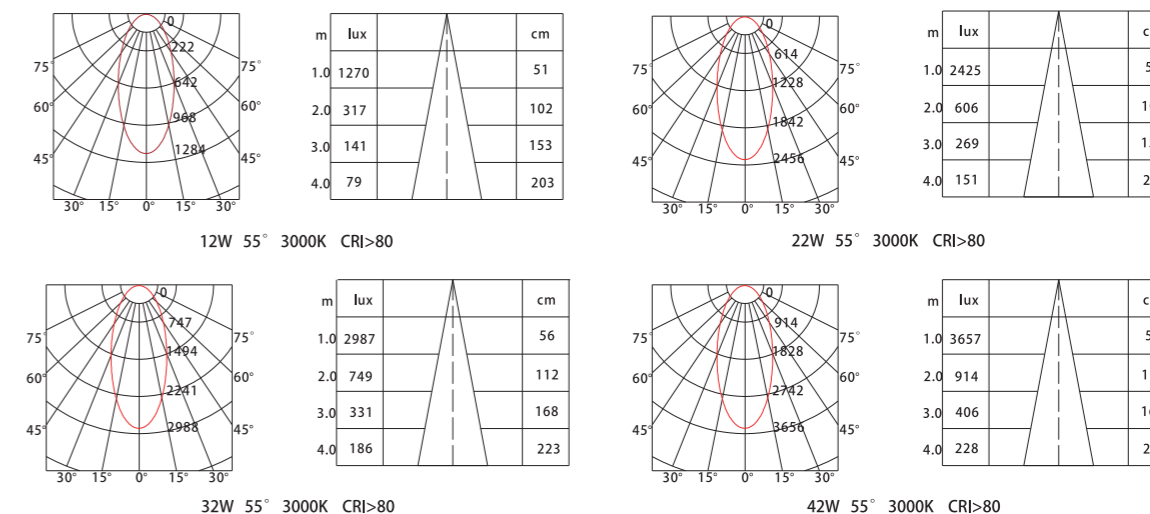

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
DLS0812C-930XY	12W	290mA	3000K	1069lm	>90	≥0.95
DLS0812C-940XY			4000K	1189lm		
DLS0812C-950XY			5000K	1159lm		
DLS0822C-930XY	22W	520mA	3000K	1989lm	>90	≥0.95
DLS0822C-940XY			4000K	2120lm		
DLS0822C-950XY			5000K	2114lm		
DLS0832C-930XY	32W	760mA	3000K	3159lm	>90	≥0.95
DLS0832C-940XY			4000K	3219lm		
DLS0832C-950XY			5000K	3349lm		
DLS0842C-930XY	42W	1000mA	3000K	4027lm	>90	≥0.95
DLS0842C-940XY			4000K	4167lm		
DLS0842C-950XY			5000K	4371lm		

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- One unit piece for light fixture up to IP67 protection rate
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Waterproof design. Outdoor application for option.
- Customized function is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 一体式灯体设计，防护等级高达IP67
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 防水设计，可用于室外
- 接受定制



Reflector color(反光杯颜色):



	CITIZEN COB		SDCM <3		IP IP67
	12W/22W/32W/42W		CRI >90		45° / 55°
	45° / 55°		φ 90/φ 130/φ 170/φ 200mm		5 Years Warranty 5年质保
	AC100-240/220-240V 50/60Hz				


DLW Series

DLW series downlights uses high-quality Nippon CITIZEN LED with high display finger, high light efficiency and low color tolerance; the lamp body uses high-purity integrated die-casting aluminum, high-grade beautiful and fast heat dissipation; 1090 aluminum reflector, bright silver, sand, black, rose gold and other colors are optional; anti-glare design, soft and non-dazzling; the whole lamp adopts waterproof design, protection grade IP67; it is a high-end commercial lighting. Tube lamp can be widely used in hotels, hospitals, subway, railway stations and other indoor and outdoor places.


DLW系列筒灯使用高品质日本西铁城LED，高显指、高光效，低色容差；灯体使用高纯度一体化压铸铝，高档美观散热快；1090铝反射器，亮银、砂银、黑色、玫瑰金多种颜色可选；防眩光设计，出光柔和不炫目；整灯采用防水设计，防护等级IP67；是一款高端的商业照明筒灯，可广泛用于酒店、医院、地铁、火车站等户内户外场所。



Dimensions 产品尺寸 (Unit: mm)

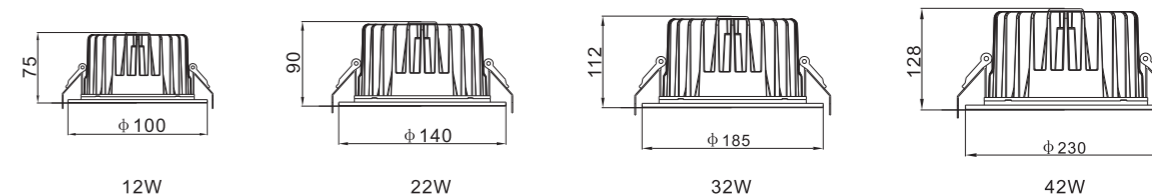

Photometric Diagram 光度分布图

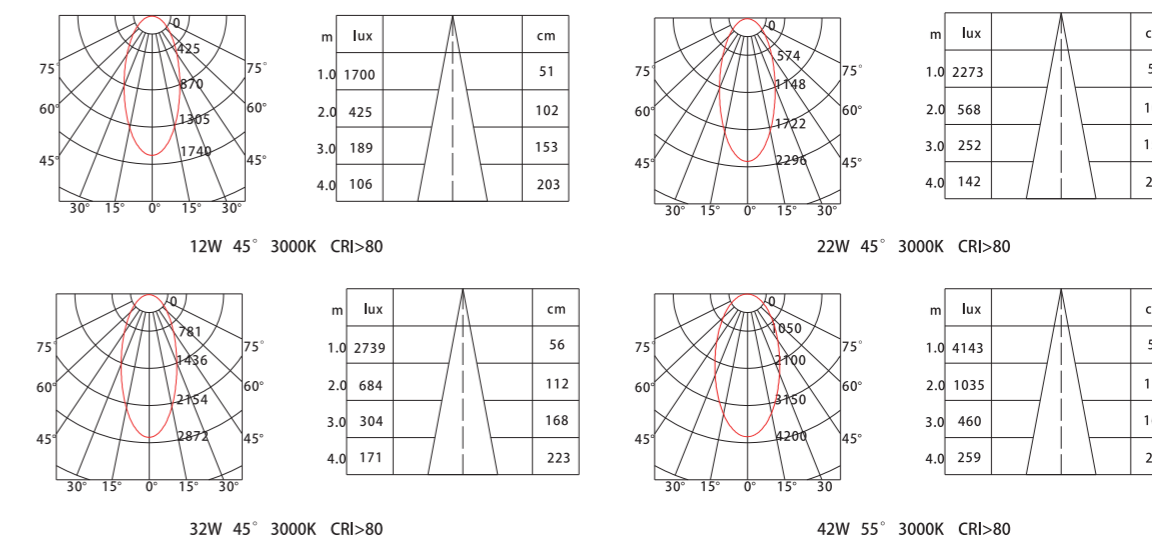

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
DLW0412C-930XY DLW0412C-940XY DLW0412C-950XY	12W	290mA	3000K 4000K 5000K	1105lm 1216lm 1199lm	>90	≥0.95
DLW0522C-930XY DLW0522C-940XY DLW0522C-950XY	22W	520mA	3000K 4000K 5000K	1472lm 1546lm 1502lm	>90	≥0.95
DLW0632C-930XY DLW0632C-940XY DLW0632C-950XY	32W	760mA	3000K 4000K 5000K	2335lm 2470lm 2477lm	>90	≥0.95
DLW0842C-930XY DLW0842C-940XY DLW0842C-950XY	42W	1000mA	3000K 4000K 5000K	3492lm 3338lm 3536lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- One unit piece for light fixture up to IP44 protection rate
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Unique wall washer design
- Customized function is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 一体式灯体设计，防护等级高达IP44
- 西铁城2步光源，确保色差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 独特的洗墙结构设计
- 接受定制



CITIZEN COB

SDCM <3



12W/22W/32W

CRI >90



80°

φ 75/φ 95/φ 125mm



AC100-240/220-240V 50/60Hz

5 YEAR 5 Years Warranty 5年质保


DWW Series

DWW Series downlight too meet all applications includes Hotel, Shopping Mall , Hospital , Metro Station,Apartment etc . Glare free UGR<19 . No flickery , 5 Years warranty for options . Life time over 50,000hrs .Operation temperature -25℃-+50℃.

DWW 系列偏光筒灯可广泛应用于酒店，商场，医院，地铁，火车站等墙壁的照明。防眩光偏光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25℃-+50℃。



Dimensions 产品尺寸 (Unit: mm)

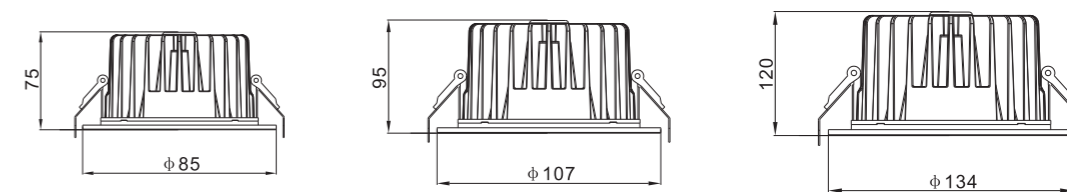


12W

22W


32W

Photometric Diagram 光度分布图




12W 80° 3000K CRI>80

m	lux	cm
1.0	583	51
2.0	145	102
3.0	64	153
4.0	36	203



22W 80° 3000K CRI>80

m	lux	cm
1.0	1021	51
2.0	255	102
3.0	113	153
4.0	63	203



32W 80° 3000K CRI>80

m	lux	cm
1.0	1451	51
2.0	362	102
3.0	161	153
4.0	90	203

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
DWW0312C-930XY	12W	290mA	3000K	1105lm	>90	≥0.95
DWW0312C-940XY			4000K	1216lm		
DWW0312C-950XY			5000K	1199lm		
DWW3522C-930XY	22W	520mA	3000K	1800lm	>90	≥0.95
DWW3522C-940XY			4000K	1904lm		
DWW3522C-950XY			5000K	1845lm		
DWW0432C-930XY	32W	760mA	3000K	2335lm	>90	≥0.95
DWW0432C-940XY			4000K	2470lm		
DWW0432C-950XY			5000K	2477lm		

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Aluminium profile heatsink to meet best heat dissipation
- Different Length and power to meet project request
- Recessed type with trim and trimless
- Gimbal and fixed type for option
- Osram LED with step 3 to ensure the SDCM <3
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized function is available


- 所有配件均由KWT自己设计、自己开模生产
- 型材灯体，散热更好
- 根据应用场所可选择不同长度和功率
- 嵌入式安装，有边和无边供选择
- 固定和转动灯体可选
- 欧司朗3步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



Dimensions 产品尺寸 (Unit: mm)

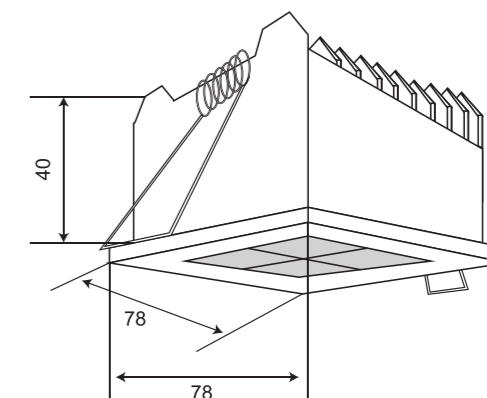

Photometric Diagram 光度分布图

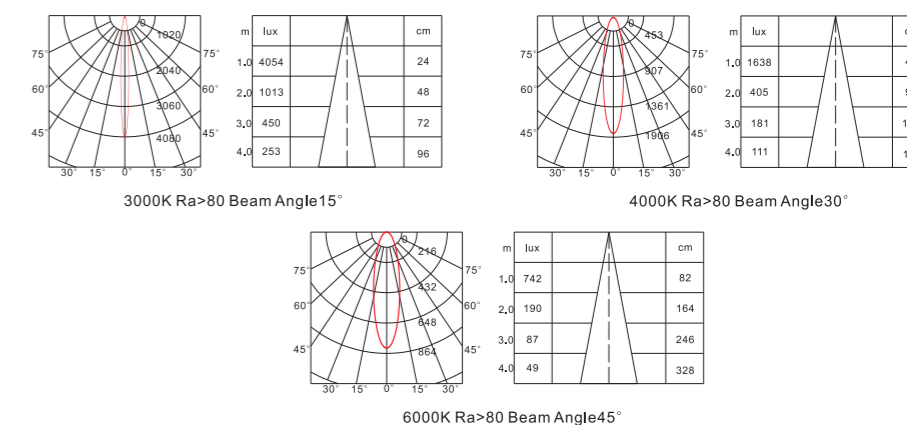

CITIZEN COB



SDCM <3



8W



CRI >90



15° / 30° / 45°



68*68mm



AC 220-240V 50/60Hz



5 Years Warranty
5年质保

SD04 Series

SD04 Series Recessed Downlight to meet any applications includes Hotel, Shopping Mall , Hospital , Metro Station ,Apartment etc . Glare free UGR<19 . No flickery , 5 Years warranty for options . Life time over 50,000hrs . Operation temperature -25°C~+50°C.

SD04 系列嵌入式筒灯可广泛应用于酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25°C~+50°C。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
SD04-930XY	8W	240mA	3000K	15° 565lm/30° 555lm/45° 545lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

GRILLE LIGHT SERIES

格栅灯系列

Model.型号

AR02-A
AR02-B
AR02-1
AR02-2
AR02-3
AR02-4

Power.功率

10 / 12 / 16W
10 / 12 / 16W
10 / 12 / 16W
10*2 / 12*2 / 16*2W
10*3 / 12*3 / 16*3W
10*4 / 12*4 / 16*4W



Advantages 产品优势

- High luminous intensity, high efficiency
- High CRI>90, SDCM<3, for high-quality lighting surroundings
- Top quality CITIZEN LED, long life span of over 40000 hours
- Interior driver, 12V dimmable, compatible with traditional electronic transformer
- Originally new appearance, cinquefoil holes for convective dissipation, to guarantee long life span

- 高亮度, 高光效
- 显指大于90, 低色容差SDCM小于3, 适用于高质量光环境
- 高品质西铁城光源
- 内置恒流驱动电源, 12V调光, 兼容传统电子变压器
- 新颖的外观, 对流的散热孔, 整灯保证40,000小时以上寿命

AR111 DIMMABLE



CITIZEN COB



SDCM <3



10W/12W/16W



CRI >90



AC/DC 12V



15° /30°




5 Years Warranty
5年质保


AR02-A Series

AR02-A design features KWT exclusive glare-free lens, same size of traditional G53 light, international top COB CITIZEN chip, KWT exclusive high-quality driver, interior driver 12v dimmable, also capable to work with traditional lamps to be grille stable specifications, good heat sink, brilliant quality, more than 40,000 hours life span.

AR02-A系列采用金瓦特独特的防眩透镜, 与传统的G53尺寸保持一致, 高品质的西铁城光源, 搭配金瓦特高效率恒流驱动电源, 内置DC12V调光电源, 外置电源高压调光, 高效率, 无频闪, 也可匹配传统的格栅灯, 在商业照明中广泛应用, 整灯寿命超过40,000以上。

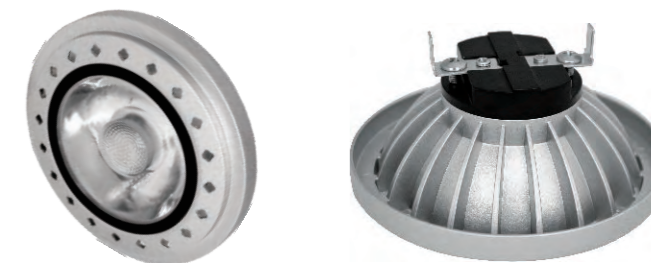


Dimensions 产品尺寸 (Unit: mm)

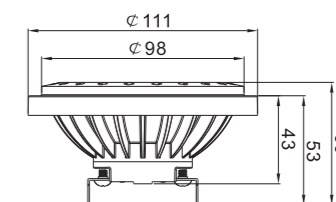

10W/12W/16W

Photometric Diagram 光度分布图

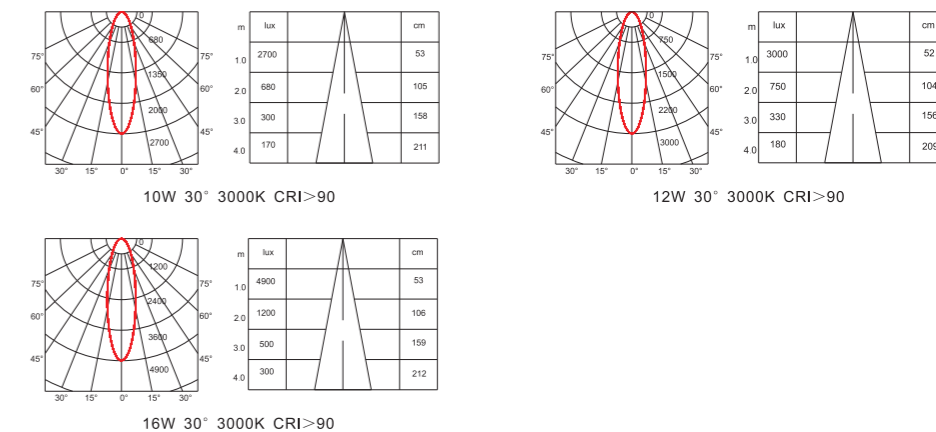

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
AR0210-AC927XY	10W	240mA	2700K	15° 550lm/30° 766lm	>90	≥0.9
AR0210-AC930XY			3000K	15° 577lm/30° 808lm		
AR0210-AC940XY			4000K	15° 672lm/30° 955lm		
AR0212-AC927XY	12W	270mA	2700K	15° 609lm/30° 808lm	>90	≥0.9
AR0212-AC930XY			3000K	15° 661lm/30° 871lm		
AR0212-AC940XY			4000K	15° 1050lm/30° 1407lm		
AR0216-AC927XY	16W	380mA	2700K	15° 966lm/30° 1365lm	>90	≥0.9
AR0216-AC930XY			3000K	15° 1050lm/30° 1407lm		
AR0216-AC940XY			4000K	15° 1113lm/30° 1459lm		

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=S(Silver)


Advantages 产品优势

- High luminous intensity, high efficiency
- High CRI>90, SDCM<3, for high-quality lighting surroundings
- Top quality CITIZEN LED, long life span of over 40000 hours
- Interior driver, 12V dimmable, compatible with traditional electronic transformer
- Originally new appearance, cinquefoil holes for convective dissipation, to guarantee long life span

- 高亮度, 高光效
- 显指大于90, 低色容差SDCM小于3, 适用于高质量光环境
- 高品质西铁城光源
- 内置恒流驱动电源, 12V调光, 兼容传统电子变压器
- 新颖的外观, 对流的散热孔, 整灯保证40,000小时以上寿命




Dimensions 产品尺寸 (Unit: mm)

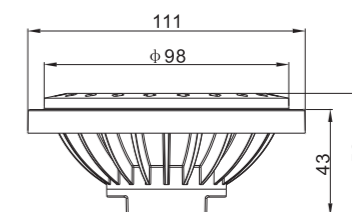

10W/12W/16W

Photometric Diagram 光度分布图

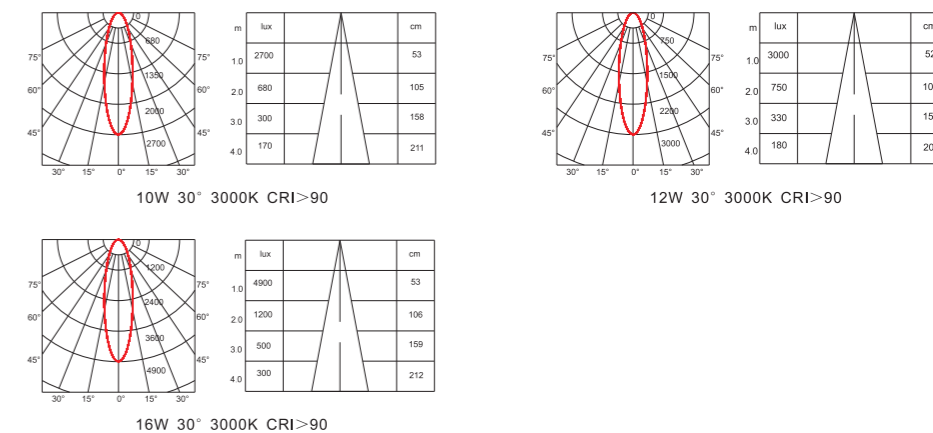

CITIZEN COB



SDCM <3



10W/12W/16W



CRI >90



AC100-240/220-240V 50/60Hz



15° / 30°



5 Years Warranty
5年质保

AR02-B Series

AR02-B design features KWT exclusive glare-free lens, same size of traditional G53 light, international top COB CITIZEN chip, KWT exclusive high-quality driver, interior driver 12v dimmable, also capable to work with traditional lamps to be grille stable specifications, good heat sink, brilliant quality, more than 40,000 hours life span.

AR02-B系列采用金瓦特独特的防眩透镜, 与传统的G53尺寸保持一致, 高品质的西铁城光源, 搭配金瓦特高效率恒流驱动电源, 内置DC12V调光电源, 外置电源高压调光, 高效率, 无频闪, 也可匹配传统的格栅灯, 在商业照明中广泛应用, 整灯寿命超过40,000以上。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
AR0210-BC927XY	10W	240mA	2700K	15° 556lm/30° 766lm	>90	≥0.9
AR0210-BC930XY			3000K	15° 577lm/30° 808lm		
AR0210-BC940XY			4000K	15° 672lm/30° 955lm		
AR0212-BC927XY	12W	270mA	2700K	15° 609lm/30° 808lm	>90	≥0.9
AR0212-BC930XY			3000K	15° 661lm/30° 871lm		
AR0212-BC940XY			4000K	15° 1050lm/30° 1407lm		
AR0216-BC927XY	16W	380mA	2700K	15° 966lm/30° 1365lm	>90	≥0.9
AR0216-BC930XY			3000K	15° 1050lm/30° 1407lm		
AR0216-BC940XY			4000K	15° 1113lm/30° 1459lm		

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=S(Silver)


Advantages 产品优势

- High luminous intensity, high efficiency
- High CRI > 90, SDCM < 3, for high-quality lighting surroundings
- Top quality CITIZEN LED, long life span of over 40000 hours
- Interior driver, 12V dimmable, compatible with traditional electronic transformer
- Originally new appearance, cinquefoil holes for convective dissipation, to guarantee long life span

- 高亮度, 高光效
- 显指大于90, 低色容差SDCM小于3, 适用于高质量光环境
- 高品质西铁城光源
- 内置恒流驱动电源, 12V调光, 兼容传统电子变压器
- 新颖的外观, 对流的散热孔, 整灯保证40,000小时以上寿命




Dimensions 产品尺寸 (Unit: mm)

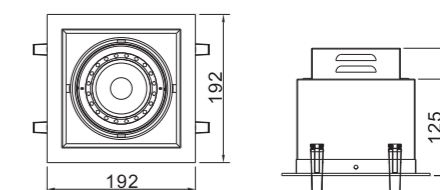

10W/12W/16W

Photometric Diagram 光度分布图

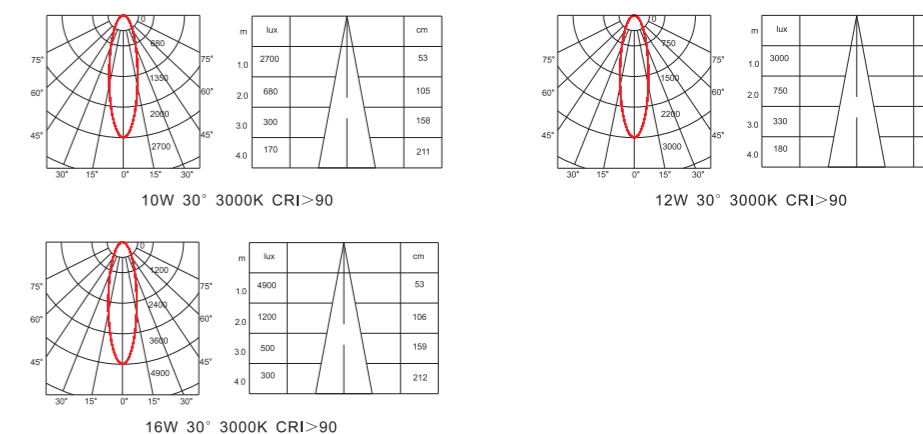

CITIZEN COB



SDCM < 3



10W / 12W / 16W



CRI > 90



AC100-240/220-240V 50/60Hz



15° / 30°



165x165mm



5 YEAR 5 Years Warranty
5年质保

AR02-1 Series

AR02-1 design features KWT exclusive glare-free lens, same size of traditional G53 light, international top COB CITIZEN chip, KWT exclusive high-quality driver, interior driver 12V dimmable or exterior driver high voltage dimmable, also capable to work with traditional lamps to be grille stable specifications, good heat sink, brilliant quality, more than 40,000 hours life span.

AR02-1系列采用金瓦特独特的防眩透镜, 与传统的G53尺寸保持一致, 高品质的西铁城光源, 搭配金瓦特高效率恒流驱动电源, 内置DC12V调光电源, 外置电源高压调光, 高效率, 无频闪, 也可匹配传统的格栅灯, 在商业照明中广泛应用, 整灯寿命超过40,000以上。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
AR0210-1-C927XY	10W	240mA	2700K	15° 556lm/30° 766lm	>90	≥0.9
AR0210-1-C930XY			3000K	15° 577lm/30° 808lm		
AR0210-1-C940XY			4000K	15° 672lm/30° 955lm		
AR0212-1-C927XY	12W	270mA	2700K	15° 609lm/30° 808lm	>90	≥0.9
AR0212-1-C930XY			3000K	15° 661lm/30° 871lm		
AR0212-1-C940XY			4000K	15° 1050lm/30° 1407lm		
AR0216-1-C927XY	16W	380mA	2700K	15° 966lm/30° 1365lm	>90	≥0.9
AR0216-1-C930XY			3000K	15° 1050lm/30° 1407lm		
AR0216-1-C940XY			4000K	15° 1113lm/30° 1459lm		

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=S(Silver)

Advantages 产品优势

- High luminous intensity, high efficiency
- High CRI>90, SDCM<3, for high-quality lighting surroundings
- Top quality CITIZEN LED, long life span of over 40000 hours
- Interior driver, 12V dimmable, compatible with traditional electronic transformer
- Originally new appearance, cinquefoil holes for convective dissipation, to guarantee long life span

- 高亮度, 高光效
- 显指大于90, 低色容差SDCM小于3, 适用于高质量光环境
- 高品质西铁城光源
- 内置恒流驱动电源, 12V调光, 兼容传统电子变压器
- 新颖的外观, 对流的散热孔, 整灯保证40,000小时以上寿命



CITIZEN COB



SDCM <3



10W*2/12W*2/16W*2



CRI >90



AC100-240/220-240V 50/60Hz



15° /30°



310x165mm



5 YEAR 5 Years Warranty 5年质保


AR02-2 Series

AR02-2 design features KWT exclusive glare-free lens, same size of traditional G53 light, international top COB CITIZEN chip, KWT exclusive high-quality driver, interior driver 12V dimmable or exterior driver high voltage dimmable, also capable to work with traditional lamps to be grille stable specifications, good heat sink, brilliant quality, more than 40,000 hours life span.

AR02-2系列采用金瓦特独特的防眩透镜, 与传统的G53尺寸保持一致, 高品质的西铁城光源, 搭配金瓦特高效率恒流驱动电源, 内置DC12V调光电源, 外置电源高压调光, 高效率, 无频闪, 也可匹配传统的格栅灯, 在商业照明中广泛应用, 整灯寿命超过40,000以上。




Dimensions 产品尺寸 (Unit: mm)

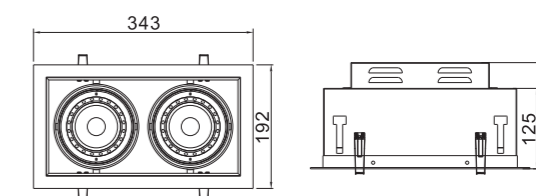

10W/12W/16W

Photometric Diagram 光度分布图

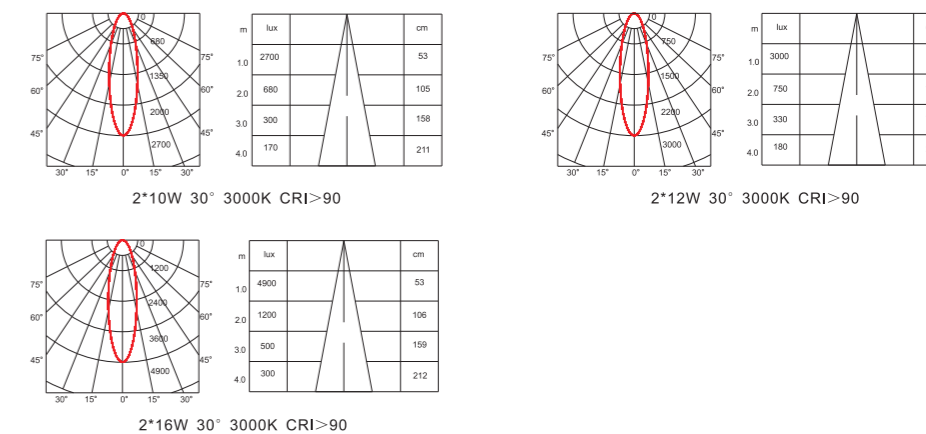

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
AR0210-2-C927XY	10W*2	480mA	2700K	15° 1112lm/30° 1532lm	>90	≥0.9
AR0210-2-C930XY			3000K	15° 1154lm/30° 1616lm		
AR0210-2-C940XY			4000K	15° 1344lm/30° 1910lm		
AR0212-2-C927XY	12W*2	540mA	2700K	15° 1218lm/30° 1616lm	>90	≥0.9
AR0212-2-C930XY			3000K	15° 1322lm/30° 1742lm		
AR0212-2-C940XY			4000K	15° 2100lm/30° 2814lm		
AR0216-2-C927XY	16W*2	760mA	2700K	15° 1932lm/30° 2730lm	>90	≥0.9
AR0216-2-C930XY			3000K	15° 2100lm/30° 2814lm		
AR0216-2-C940XY			4000K	15° 2226lm/30° 2918lm		

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=S(Silver)

Advantages 产品优势

- High luminous intensity, high efficiency
- High CRI>90, SDCM<3, for high-quality lighting surroundings
- Top quality CITIZEN LED, long life span of over 40000 hours
- Interior driver, 12V dimmable, compatible with traditional electronic transformer
- Originally new appearance, cinquefoil holes for convective dissipation, to guarantee long life span

- 高亮度, 高光效
- 显指大于90, 低色容差SDCM小于3, 适用于高质量光环境
- 高品质西铁城光源
- 内置恒流驱动电源, 12V调光, 兼容传统电子变压器
- 新颖的外观, 对流的散热孔, 整灯保证40,000小时以上寿命



CITIZEN COB

SDCM <3



10W*3/12W*3/16W*3

CRI >90



AC100-240/220-240V 50/60Hz

15° /30°



460x165mm

5 YEAR
5 Years Warranty
5年质保


AR02-3 Series

AR02-3 design features KWT exclusive glare-free lens, same size of traditional G53 light, international top COB CITIZEN chip, KWT exclusive high-quality driver, interior driver 12V dimmable or exterior driver high voltage dimmable, also capable to work with traditional lamps to be grille stable specifications, good heat sink, brilliant quality, more than 40,000 hours life span.

AR02-3系列采用金瓦特独特的防眩透镜, 与传统的G53尺寸保持一致, 高品质的西铁城光源, 搭配金瓦特高效率恒流驱动电源, 内置DC12V调光电源, 外置电源高压调光, 高效率, 无频闪, 也可匹配传统的格栅灯, 在商业照明中广泛应用, 整灯寿命超过40,000以上。




Dimensions 产品尺寸 (Unit: mm)

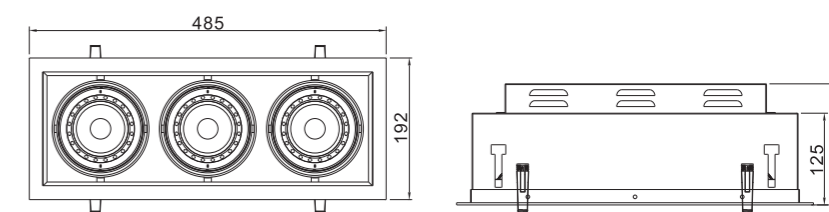


10W*3/12W*3/16W*3

Photometric Diagram 光度分布图

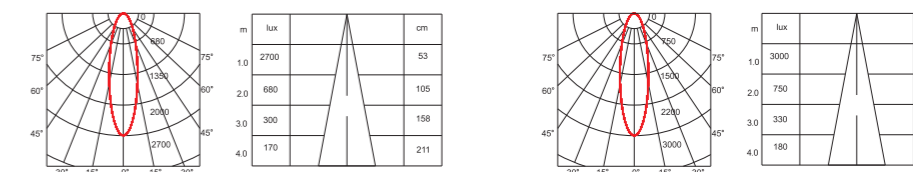

3°*10W 30° 3000K CRI>90

3°*12W 30° 3000K CRI>90

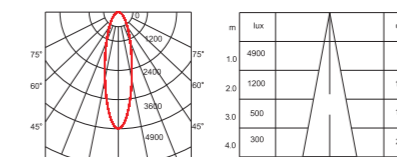

3°*16W 30° 3000K CRI>90

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
AR0210-3-C927XY	10W*3	720mA	2700K	15° 1668lm/30° 2298lm	>90	≥0.9
AR0210-3-C930XY			3000K	15° 1731lm/30° 2424lm		
AR0210-3-C940XY			4000K	15° 2016lm/30° 2865lm		
AR0212-3-C927XY	12W*3	870mA	2700K	15° 1827lm/30° 2424lm	>90	≥0.9
AR0212-3-C930XY			3000K	15° 1983lm/30° 2613lm		
AR0212-3-C940XY			4000K	15° 3150lm/30° 4221lm		
AR0216-3-C927XY	16W*3	1100mA	2700K	15° 2898lm/30° 4095lm	>90	≥0.9
AR0216-3-C930XY			3000K	15° 3150lm/30° 4221lm		
AR0216-3-C940XY			4000K	15° 3339lm/30° 4377lm		

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=S(Silver)


Advantages 产品优势

- High luminous intensity, high efficiency
- High CRI>90, SDCM<3, for high-quality lighting surroundings
- Top quality CITIZEN LED, long life span of over 40000 hours
- Interior driver, 12V dimmable, compatible with traditional electronic transformer
- Originally new appearance, cinquefoil holes for convective dissipation, to guarantee long life span

- 高亮度, 高光效
- 显指大于90, 低色容差SDCM小于3, 适用于高质量光环境
- 高品质西铁城光源
- 内置恒流驱动电源, 12V调光, 兼容传统电子变压器
- 新颖的外观, 对流的散热孔, 整灯保证40,000小时以上寿命




Dimensions 产品尺寸 (Unit: mm)

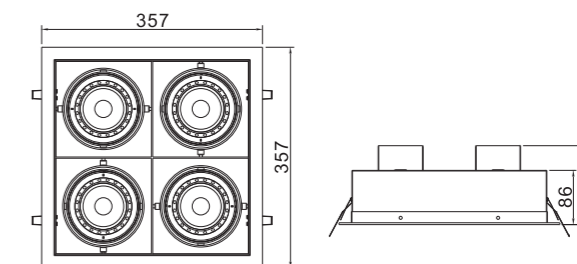

10W*4/12W*4/16W*4

Photometric Diagram 光度分布图

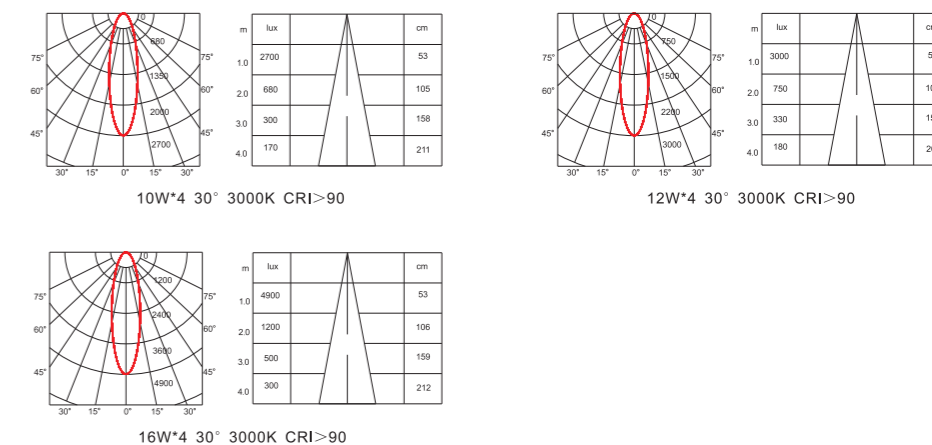

CITIZEN COB



SDCM <3



10W*4/12W*4/16W*4



CRI >90



AC100-240/220-240V 50/60Hz



15° /30°



340x340mm



5 Years Warranty
5年质保

AR02-4 Series

AR02-4 design features KWT exclusive glare-free lens, same size of traditional G53 light, international top COB CITIZEN chip, KWT exclusive high-quality driver, interior driver 12V dimmable or exterior driver high voltage dimmable, also capable to work with traditional lamps to be grille stable specifications, good heat sink, brilliant quality, more than 40,000 hours life span.

AR02-4系列采用金瓦特独特的防眩透镜, 与传统的G53尺寸保持一致, 高品质的西铁城光源, 搭配金瓦特高效率恒流驱动电源, 内置DC12V调光电源, 外置电源高压调光, 高效率, 无频闪, 也可匹配传统的格栅灯, 在商业照明中广泛应用, 整灯寿命超过40,000以上。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
AR0210-4-C927XY	10W*4	960mA	2700K	15° 2224lm/30° 3064lm	>90	≥0.9
AR0210-4-C930XY			3000K	15° 2308lm/30° 3232lm		
AR0210-4-C940XY			4000K	15° 2688lm/30° 3820lm		
AR0212-4-C927XY	12W*4	1150mA	2700K	15° 2436lm/30° 3232lm	>90	≥0.9
AR0212-4-C930XY			3000K	15° 2644lm/30° 3484lm		
AR0212-4-C940XY			4000K	15° 4200lm/30° 5628lm		
AR0216-4-C927XY	16W*4	1520mA	2700K	15° 3864lm/30° 5460lm	>90	≥0.9
AR0216-4-C930XY			3000K	15° 4200lm/30° 5628lm		
AR0216-4-C940XY			4000K	15° 4452lm/30° 5836lm		

Remark: X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=S(Silver)

GRILLE LIGHT SERIES

格栅灯系列

Model.型号

GLS/M/L01
GLS/M/L02
GLS/M/L03
TRS/M/L01
TRS/M/L02

Power.功率

10 / 15 / 20W
2*10 / 2*15 / 2*20W
3*10 / 3*15 / 3*20W
10 / 15 / 20 W
2*10 / 2*15 / 2*20W




Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Equipped with KWT independent research and development of high-quality driver


- 高亮度, 低色容差SDCM小于3, 低光衰
- 使用透镜和反光镜组合的光学原理
- 配置金瓦特独立研发的高品质恒流驱动电源
- 外置电源可配控可调光 (200-240v输入) 和0-10v (100-240v输入)
- 精密元件设计, 保证使用寿命长达40,000小时以上



Dimensions 产品尺寸 (Unit: mm)

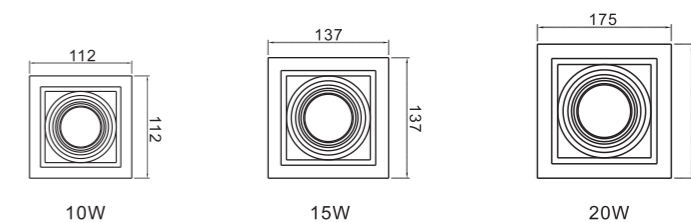

Photometric Diagram 光度分布图

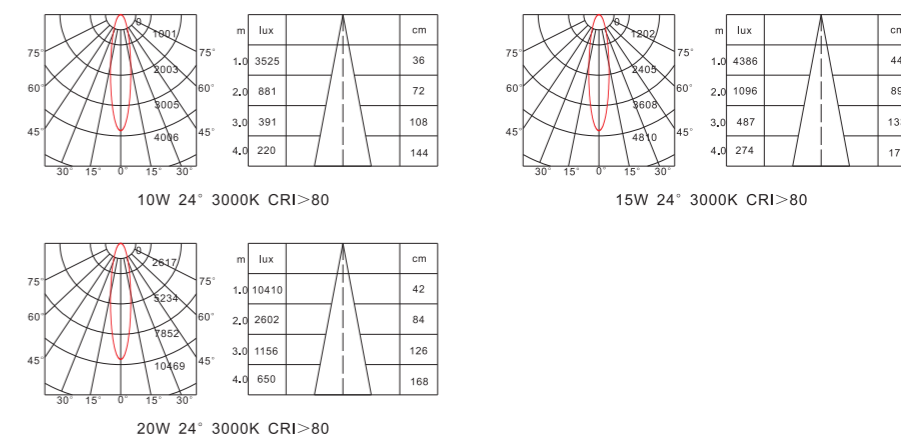

CITIZEN COB



SDCM <3



10W/15W/20W



Color Black/White



15° /24°



100*100/120*120/160*160mm



AC100-240/220-240V 50/60Hz



5 YEAR 5 Years Warranty 5年质保



CRI >90

GLS/M/L01 Series

GLseries of face frames using die-casting molding, advanced aluminum radiator, use lens and reflector combination of optical systems, top COB CITIZEN chip, Equipped with KWT independent research and development of high-quality driver. convenient, more than 40,000 hours.

GL系列面框采用压铸成型, 使用先进的铝合金散热器, 采用透镜和反光镜组合的光学原理, 角度精准。高品质西铁城光源, 搭配金瓦特自主研发的高品质恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
GLS0110-930XY	10W	240mA	3000K	15° 910lm/24° 929lm	>90	≥0.9
GLS0110-940XY	10W	240mA	4000K	15° 982lm/24° 1085lm	>90	≥0.9
GLM0115-930XY	15W	360mA	3000K	15° 1470lm/24° 1577lm	>90	≥0.9
GLM0115-940XY	15W	360mA	4000K	15° 1507lm/24° 1635lm	>90	≥0.9
GLL0120-930XY	20W	480mA	3000K	15° 2286lm/24° 2394lm	>90	≥0.95
GLL0120-940XY	20W	480mA	4000K	15° 2312lm/24° 2436lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Equipped with KWT independent research and development of high-quality driver

- 高亮度，低色容差SDCM小于3，低光衰
- 使用透镜和反光镜组合的光学系统
- 配置金瓦特独立研发的高品质恒流驱动电源
- 外置电源可配可控可调光（200-240v输入）和0-10v（100-240v输入）
- 精密元件设计，保证使用寿命长达40,000小时以上



CITIZEN COB

SDCM <3



2*15W/2*15W/2*20W

Color Black/White



15° /24°



200*100/230*120/305*160mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保



>90


GLS/M/L02 Series

GL series of face frames using die-casting molding, advanced aluminum radiator, use lens and reflector combination of optical systems, top COB CITIZEN chip, Equipped with KWT independent research and development of high-quality driver. convenient, more than 40,000 hours.


GL系列面框采用压铸成型，使用先进的铝合金散热器，采用透镜和反光镜组合的光学原理，角度精准。高品质西铁城光源，搭配金瓦特自主研发的高品质恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

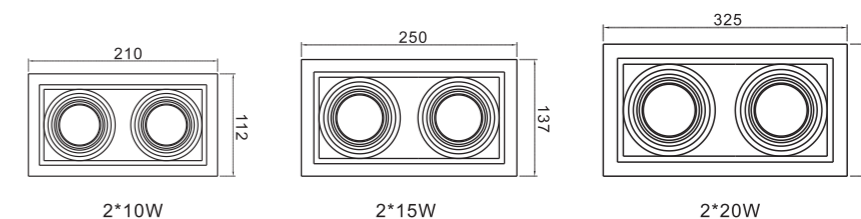


Photometric Diagram 光度分布图

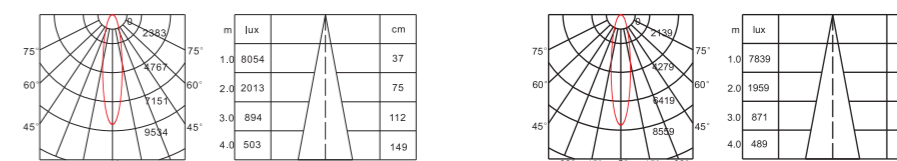

2*10W 24° 3000K CRI>80

2*15W 24° 3000K CRI>80

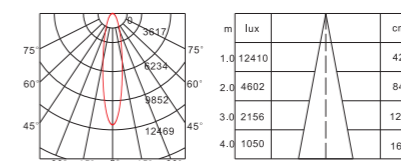

2*20W 24° 3000K CRI>80

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
GLS0210-930XY	2*10W	480mA	3000K	15° 2007lm/24° 2114lm	>90	≥0.95
GLS0210-940XY	2*10W	480mA	4000K	15° 2085lm/24° 2212lm	>90	≥0.95
GLM0215-930XY	2*15W	720mA	3000K	15° 3057lm/24° 3125lm	>90	≥0.95
GLM0215-940XY	2*15W	720mA	4000K	15° 3112lm/24° 3187lm	>90	≥0.95
GLL0220-930XY	2*20W	960mA	3000K	15° 3820lm/24° 3864lm	>90	≥0.95
GLL0220-940XY	2*20W	960mA	4000K	15° 3856lm/24° 3942lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Equipped with KWT independent research and development of high-quality driver

- 高亮度，低色容差SDCM小于3，低光衰
- 使用透镜和反光镜组合的光学系统
- 配置金瓦特独立研发的高品质恒流驱动电源
- 外置电源可配可控可调光（200-240v输入）和0-10v（100-240v输入）
- 精密元件设计，保证使用寿命长达40,000小时以上



Dimensions 产品尺寸 (Unit: mm)

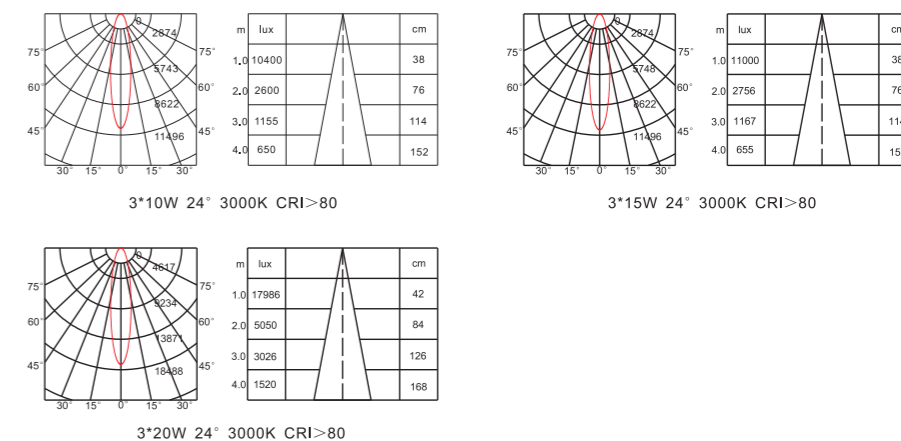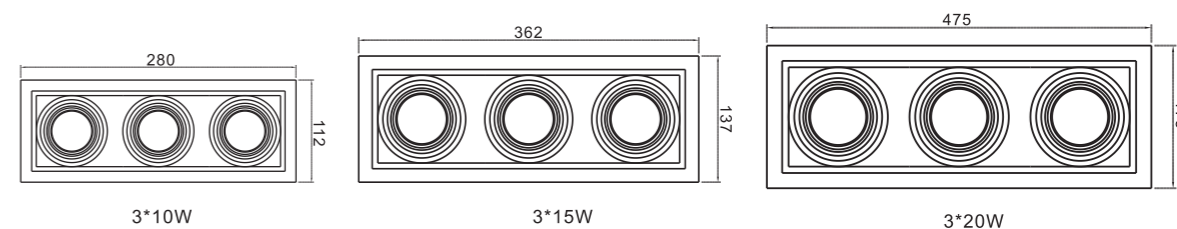

CITIZEN COB



<3



3*10W/3*15W/3*20W



Black/White



15° / 24°



260*100/345*120/460*160mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保



>90

GLS/M/L03 Series

GL series of face frames using die-casting molding, advanced aluminum radiator, use lens and reflector combination of optical systems, top COB CITIZEN chip, Equipped with KWT independent research and development of high-quality driver. convenient, more than 40,000 hours.

GL系列面框采用压铸成型，使用先进的铝合金散热器，采用透镜和反光镜组合的光学原理，角度精准。高品质西铁城光源，搭配金瓦特自主研发的高品质恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
GLS0310-930XY	3*10W	720mA	3000K	15° 2714lm/24° 2867lm	>90	≥0.95
GLS0310-940XY	3*10W	720mA	4000K	15° 2912lm/24° 3030lm	>90	≥0.95
GLM0315-930XY	3*15W	1080mA	3000K	15° 4526lm/24° 4612lm	>90	≥0.95
GLM0315-940XY	3*15W	1080mA	4000K	15° 4589lm/24° 4674lm	>90	≥0.95
GLL0320-930XY	3*20W	1400mA	3000K	15° 6410lm/24° 6534lm	>90	≥0.95
GLL0320-940XY	3*20W	1400mA	4000K	15° 6480lm/24° 6614lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Equipped with KWT independent research and development of high-quality driver

- 高亮度，低色容差SDCM小于3，低光衰
- PC反光杯和高档玻璃，透光率高达95%
- 配置金瓦特独立研发的高品质恒流驱动电源
- 内置电源可配可控可调光（200-240v输入）和0-10v（100-240v输入）
- 精密元件设计，保证使用寿命长达40,000小时以上



CITIZEN COB



SDCM <3



10W/15W/20W



Color Black



15° /24°



100*100/113*113/158*158



AC100-240/220-240V 50/60Hz



5 YEAR 5 Years Warranty 5年质保



CRI >90


TRS/M/L01 Series

TR series of face frames using die-casting molding, advanced aluminum radiator, use lens and reflector combination of optical systems, top COB CITIZEN chip, Equipped with KWT independent research and development of high-quality driver. convenient, more than 40,000 hours.


TR系列面框采用压铸成型，使用先进的铝合金散热器，PC反光杯和高档玻璃，透光率高达95%，角度精准。高品质西铁城光源，搭配金瓦特自主研发的高品质恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

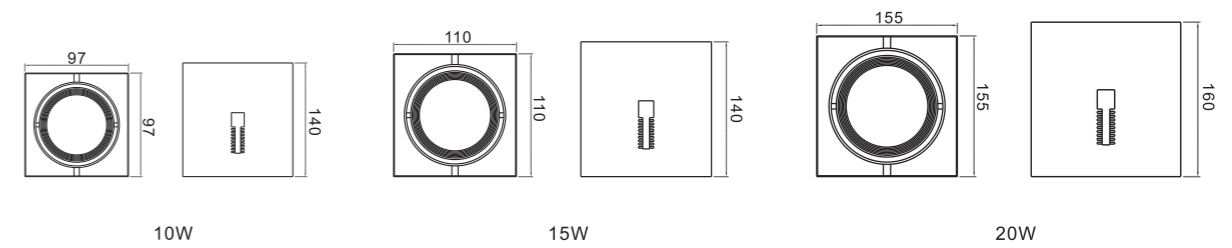

Photometric Diagram 光度分布图

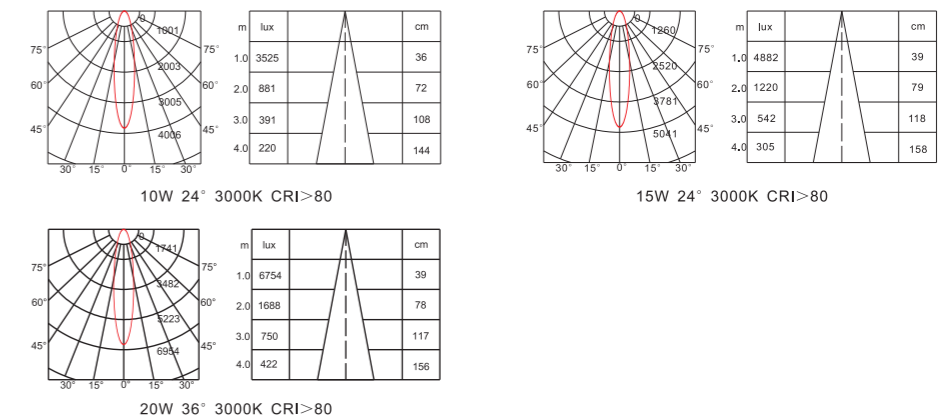

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
TRS0110-930XY	10W	240mA	3000K	15° 810lm/24° 885lm	>90	≥0.9
TRS0110-940XY	10W	240mA	4000K	15° 912lm/24° 994lm	>90	≥0.9
TRM0115-930XY	15W	360mA	3000K	15° 1210lm/24° 1278lm	>90	≥0.95
TRM0115-940XY	15W	360mA	4000K	15° 1220lm/24° 1275lm	>90	≥0.95
TRL0120-930XY	20W	480mA	3000K	24° 2316lm/36° 2375lm	>90	≥0.95
TRL0120-940XY	20W	480mA	4000K	24° 2490lm/36° 2512lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- The use of lens and reflector combination of optical systems
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 0-10v Dimmable (100-240v input)
- Equipped with KWT independent research and development of high-quality driver

- 高亮度，低色容差SDCM小于3，低光衰
- PC反光杯和高档玻璃，透光率高达95%
- 配置金瓦特独立研发的高品质恒流驱动电源
- 内置电源可配可控可调光（200-240v输入）和0-10v（100-240v输入）
- 精密元件设计，保证使用寿命长达40,000小时以上



CITIZEN COB

SDCM <3



2*10W/2*15W/2*20W

Color Black



15° / 24°



200*100/243*113/338*158



AC100-240/220-240V 50/60Hz



5 YEARS 5 Years Warranty 5年质保



>90


TRS/M/L02 Series

TR series of face frames using die-casting molding, advanced aluminum radiator, use lens and reflector combination of optical systems, top COB CITIZEN chip, Equipped with KWT independent research and development of high-quality driver. convenient, more than 40,000 hours.


TR系列面框采用压铸成型，使用先进的铝合金散热器，PC反光杯和高档玻璃，透光率高达95%，角度精准。高品质西铁城光源，搭配金瓦特自主研发的高品质恒流驱动电源，可调光，高效率，无频闪，整灯寿命超过40,000小时。



Dimensions 产品尺寸 (Unit: mm)

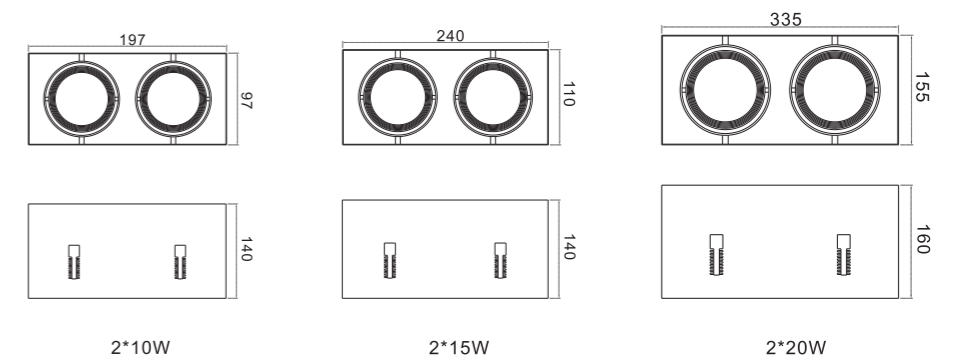

Photometric Diagram 光度分布图

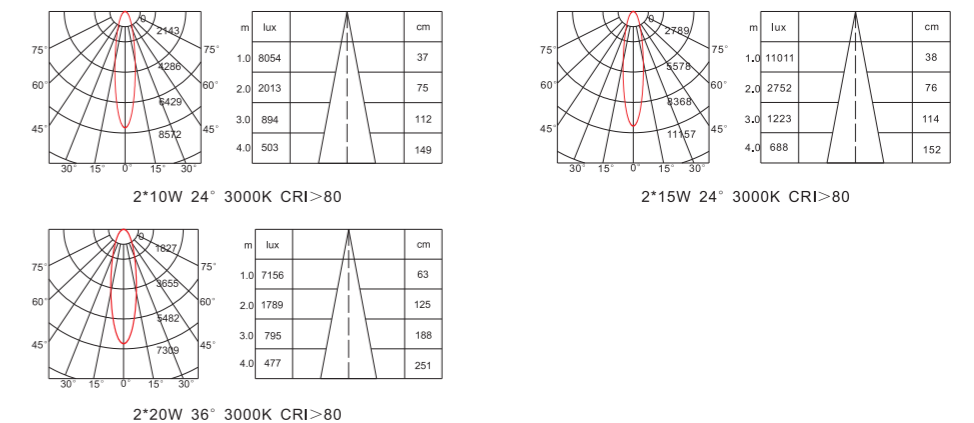

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
TRS0210-930XY	2*10W	480mA	3000K	15° 1751lm/24° 1800lm	>90	≥0.95
TRS0210-940XY	2*10W	480mA	4000K	15° 1786lm/24° 1850lm	>90	≥0.95
TRM0215-930XY	2*15W	720mA	3000K	15° 2468lm/24° 2592lm	>90	≥0.95
TRM0215-940XY	2*15W	720mA	4000K	15° 2612lm/24° 2738lm	>90	≥0.95
TRL0220-930XY	2*20W	960mA	3000K	24° 4134lm/36° 4215lm	>90	≥0.95
TRL0220-940XY	2*20W	960mA	4000K	24° 4444lm/36° 4532lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

PULL-OUT DOWNLIGHT SERIES

抽拉式系列

Model.型号

PORC7312
PORM6212
POR9812
POS10012
POD100-2*12
POT100-3*12
POR13025
POS13025
POD130-2*25
POT130-3*25

Power.功率

12W
12W
12W
12W
2*12W
3*12W
25W
25W
2*25W
3*25W



Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



CITIZEN COB



SDCM <3



12W



Color Black/White



Lens(透镜): 12° /24° /36°

Reflector(反光杯): 15° /24° /38° /60°



φ 65mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

PORC7312 Series


PO Series Recessed Spotlight to meet any applications includes Hotel, Shopping Mall , Hospital , Metro Station,Apartment etc. Glare free UGR<19. No flickery , 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25℃~+50℃.


PO 系列嵌入式射灯可广泛应用于酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25℃~+50℃。



Dimensions 产品尺寸 (Unit: mm)

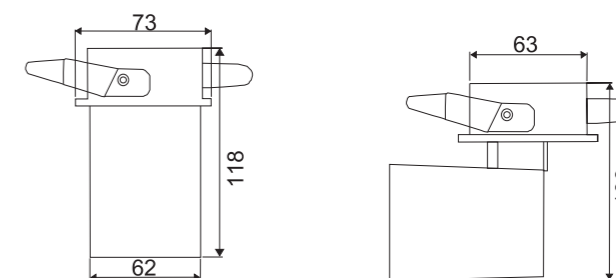

Photometric Diagram 光度分布图

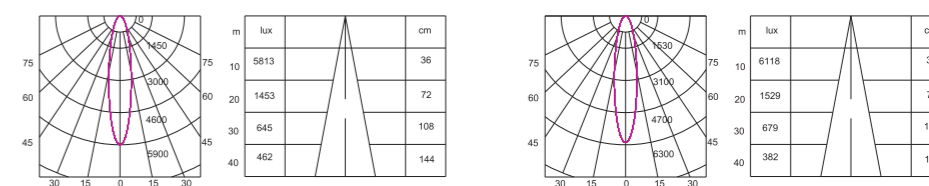

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
PORC7312-927XY	12W	290mA	2700K	12° 1112lm/24° 1088lm/36° 1036lm	>90	≥0.9
PORC7312-930XY	12W	290mA	3000K	12° 1144lm/24° 1102lm/36° 1075lm	>90	≥0.9
PORC7312-940XY	12W	290mA	4000K	12° 1178lm/24° 1120lm/36° 1091lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available


- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



Dimensions 产品尺寸 (Unit: mm)

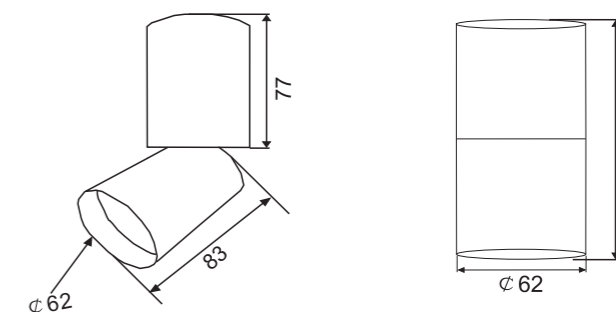

Photometric Diagram 光度分布图

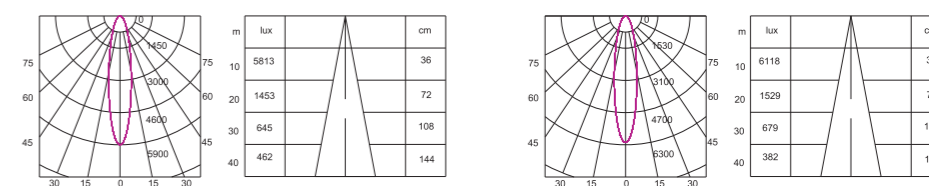

12W 24° 3000K CRI>90

12W 24° 4000K CRI>90



CITIZEN COB



SDCM <3



12W



Color Black/White



Lens(透镜): 12° /24° /36°
Reflector(反光杯): 15° /24° /38° /60°



Surface Mounted (明装)



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

PORM6212 Series

PORM Series Surface Mounted Spotlight to meet any applications includes Hotel, Shopping Mall, Hospital, Metro Station, Apartment etc. Glare free UGR<19. No flickery, 5 Years warranty for options. Life time over 50,000hrs. Operation temperature -25°C-+50°C.

PORM系列明装射灯可广泛应用于酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25°C-+50°C。

Order Information 产品信息


Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
PORM6212-927XY	12W	290mA	2700K	12° 1112lm/24° 1088lm/36° 1036lm	>90	≥0.9
PORM6212-930XY	12W	290mA	3000K	12° 1144lm/24° 1102lm/36° 1075lm	>90	≥0.9
PORM6212-940XY	12W	290mA	4000K	12° 1178lm/24° 1120lm/36° 1091lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制

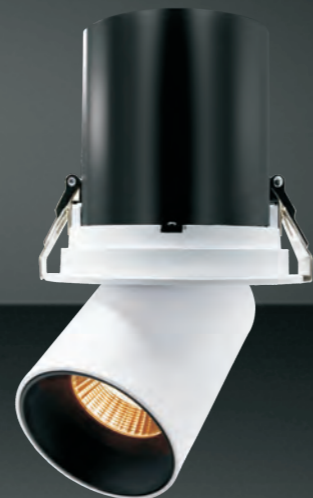

CITIZEN COB



SDCM <3



12W



Color Black/White



Lens(透镜): 12° /24° /36°
Reflector(反光杯): 15° /24° /38° /60°



φ90mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

POR9812 Series


PO Series Recessed Spotlight to meet any applications includes Hotel, Shopping Mall, Hospital, Metro Station, Apartment etc. Glare free UGR<19. No flickery, 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25°C~+50°C.


PO系列嵌入式射灯可广泛应用于酒店、商场、医院、地铁、火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25°C~+50°C。



Dimensions 产品尺寸 (Unit: mm)

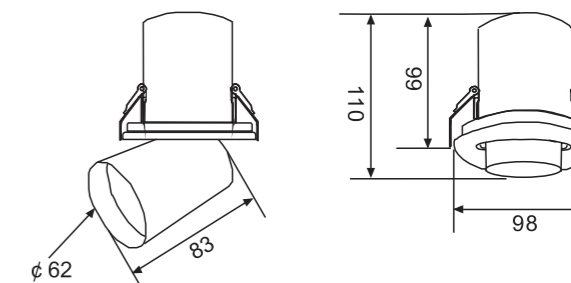

Photometric Diagram 光度分布图

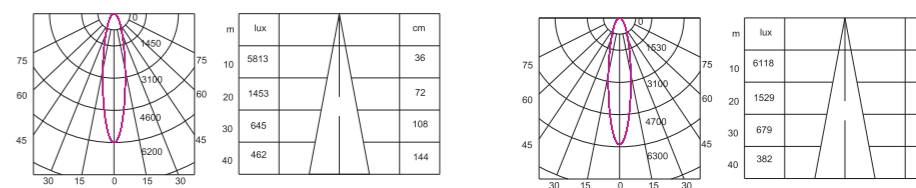

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
POR9812-927XY	12W	290mA	2700K	12° 1112lm/24° 1088lm/36° 1036lm	>90	≥0.9
POR9812-930XY	12W	290mA	3000K	12° 1144lm/24° 1102lm/36° 1075lm	>90	≥0.9
POR9812-940XY	12W	290mA	4000K	12° 1178lm/24° 1120lm/36° 1091lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



CITIZEN COB



SDCM <3



12W



Color Black/White



Lens(透镜): 12° /24° /36°
Reflector(反光杯): 15° /24° /38° /60°



90*90mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

POS10012 Series


PO Series Recessed Spotlight to meet any applications includes Hotel, Shopping Mall, Hospital, Metro Station, Apartment etc. Glare free UGR<19. No flickery, 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25°C~+50°C.


PO系列嵌入式射灯可广泛应用于酒店、商场、医院、地铁、火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25°C~+50°C。



Dimensions 产品尺寸 (Unit: mm)

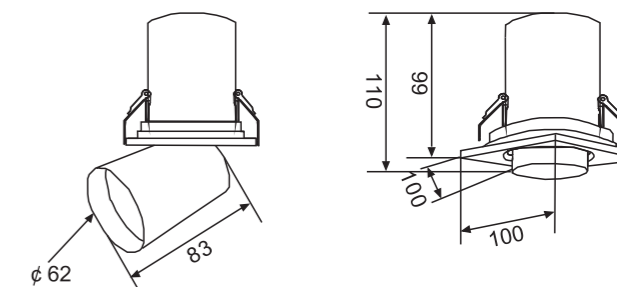

Photometric Diagram 光度分布图

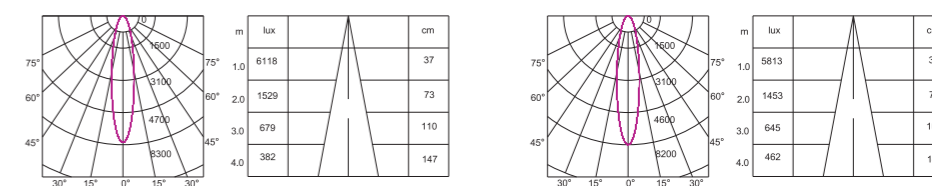

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
POS10012-927XY	12W	290mA	2700K	12° 1112lm/24° 1088lm/36° 1036lm	>90	≥0.9
POS10012-930XY	12W	290mA	3000K	12° 1144lm/24° 1102lm/36° 1075lm	>90	≥0.9
POS10012-940XY	12W	290mA	4000K	12° 1178lm/24° 1120lm/36° 1091lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



CITIZEN COB



SDCM <3



2*12W



Color Black/White



Lens(透镜): 12° /24° /36°
Reflector(反光杯): 15° /24° /38° /60°



175*90mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

POD100-2*12 Series


PO Series Recessed Spotlight to meet any applications includes Hotel, Shopping Mall, Hospital, Metro Station, Apartment etc. Glare free UGR<19. No flickery, 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25°C~+50°C.


PO系列嵌入式射灯可广泛应用于酒店、商场、医院、地铁、火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25°C~+50°C。



Dimensions 产品尺寸 (Unit: mm)

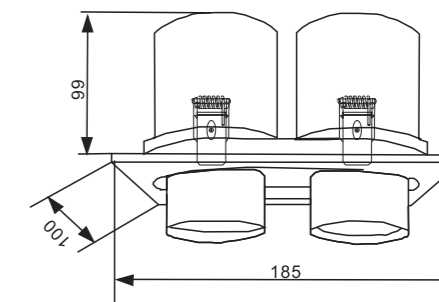

Photometric Diagram 光度分布图

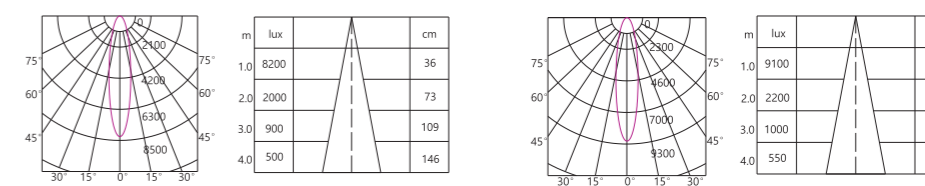

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
POD100-2*12-927XY	2*12W	570mA	2700K	12° 2380lm/24° 2330lm/36° 2310lm	>90	≥0.9
POD100-2*12-930XY	2*12W	570mA	3000K	12° 2230lm/24° 2470lm/36° 2640lm	>90	≥0.9
POD100-2*12-940XY	2*12W	570mA	4000K	12° 2910lm/24° 2730lm/36° 3020lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available



- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



CITIZEN COB



SDCM <3



3*12W



Color Black/White



Lens(透镜): 12° /24° /36°

Reflector(反光杯): 15° /24° /38° /60°



260*90mm



AC100-240/220-240V 50/60Hz



5 YEAR 5 Years Warranty
5年质保

POT100-3*12 Series


PO Series Recessed Spotlight to meet any applactions includes Hotel, Shopping Mall , Hospital , Metro Station,Apartment etc. Glare free UGR<19. No flickery , 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25℃-+50℃.


PO 系列嵌入式射灯可广泛应用于酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25℃-+50℃。




Dimensions 产品尺寸 (Unit: mm)

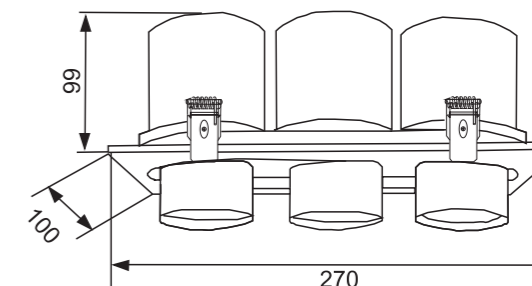

Photometric Diagram 光度分布图



3*12W 36° 2700K CRI>90



3*12W 36° 3000K CRI>90

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
POT100-3*12-927XY	3*12W	850mA	2700K	12° 3375lm/24° 3420lm/36° 3415lm	>90	≥0.9
POT100-3*12-930XY	3*12W	850mA	3000K	12° 3456lm/24° 3566lm/36° 3545lm	>90	≥0.9
POT100-3*12-940XY	3*12W	850mA	4000K	12° 3521lm/24° 3608lm/36° 3597lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available


- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



Dimensions 产品尺寸 (Unit: mm)

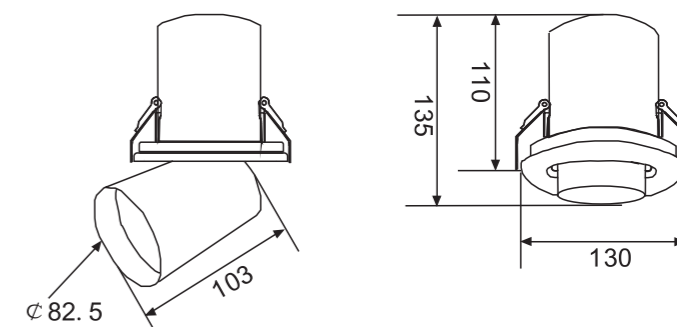

Photometric Diagram 光度分布图

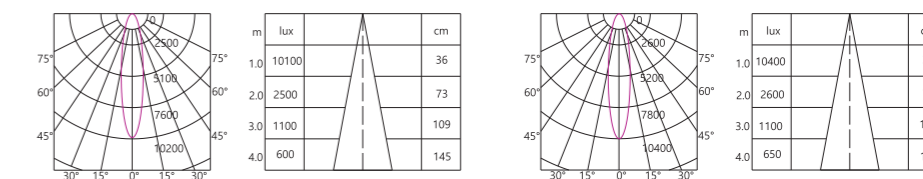

CITIZEN COB



SDCM <3



25W



Color Black/White



15° /24° /36°



φ 120mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

POR13025 Series

PO Series Recessed Spotlight to meet any applications includes Hotel, Shopping Mall, Hospital, Metro Station, Apartment etc. Glare free UGR<19. No flickery, 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25°C~+50°C.

PO系列嵌入式射灯可广泛应用于酒店、商场、医院、地铁、火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25°C~+50°C。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
POR13025-927XY	25W	600mA	2700K	15° 1770lm/24° 1860lm/36° 2010lm	>90	≥0.9
POR13025-930XY	25W	600mA	3000K	15° 2120lm/24° 2156lm/36° 2170lm	>90	≥0.9
POR13025-940XY	25W	600mA	4000K	15° 2300lm/24° 2331lm/36° 2450lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available


- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



Dimensions 产品尺寸 (Unit: mm)

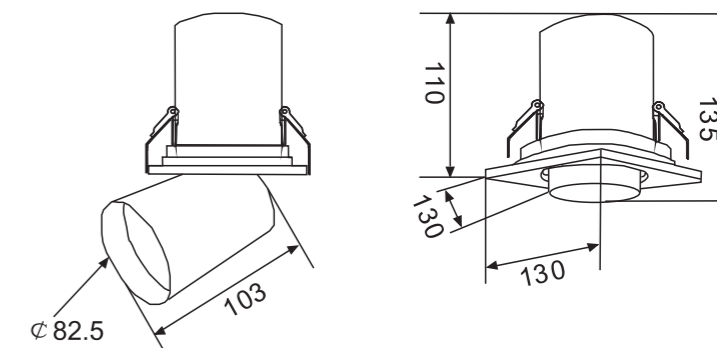

Photometric Diagram 光度分布图

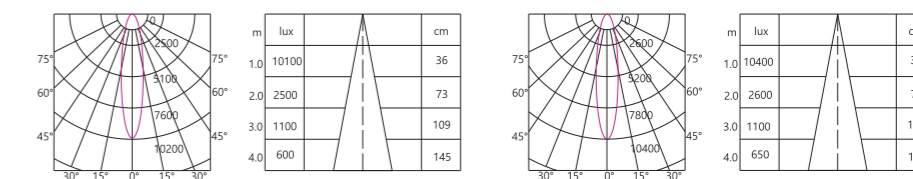

CITIZEN COB



SDCM <3



25W



Color Black/White



15° /24° /36°



120*120 mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

POS13025 Series

PO Series Recessed Spotlight to meet any applications includes Hotel, Shopping Mall, Hospital, Metro Station, Apartment etc. Glare free UGR<19. No flickery, 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25°C~+50°C.

PO系列嵌入式射灯可广泛应用于酒店、商场、医院、地铁、火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25°C~+50°C。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
POS13025-927XY	25W	600mA	2700K	15° 1770lm/24° 1860lm/36° 2010lm	>90	≥0.9
POS13025-930XY	25W	600mA	3000K	15° 2120lm/24° 2156lm/36° 2170lm	>90	≥0.9
POS13025-940XY	25W	600mA	4000K	15° 2300lm/24° 2331lm/36° 2450lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000K / 2700K-5000K
- 接受定制



CITIZEN COB



SDCM <3



2*25W



Color Black/White



15° /24° /36°



120*230 mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

POD130-2*25 Series


PO Series Recessed Spotlight to meet any applications includes Hotel, Shopping Mall , Hospital , Metro Station,Apartment etc. Glare free UGR<19. No flickery , 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25℃~+50℃.


PO 系列嵌入式射灯可广泛应用于酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25℃~+50℃。



Dimensions 产品尺寸 (Unit: mm)

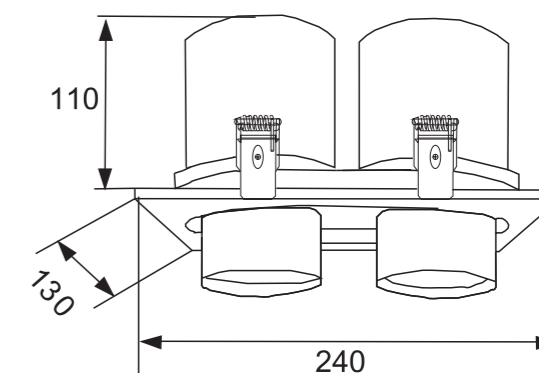

Photometric Diagram 光度分布图

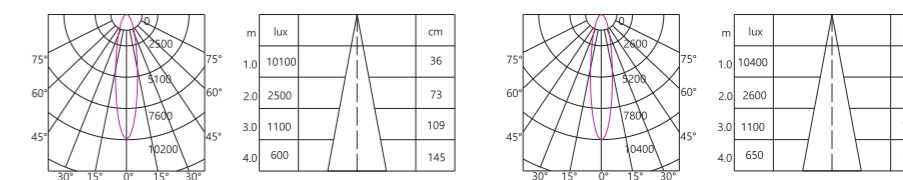

Order Information 产品信息


Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
POD130-2*25-927XY	2*25W	1200mA	2700K	12° 4992lm/24° 4960lm/36° 4782lm	>90	≥0.9
POD130-2*25-930XY	2*25W	1200mA	3000K	12° 5095lm/24° 5004lm/36° 4826lm	>90	≥0.9
POD130-2*25-940XY	2*25W	1200mA	4000K	12° 5165lm/24° 5100lm/36° 4982lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square , Round ,Single head and double heads type for options
- The light head can stretch out and draw back base on project request
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形、方形单头和双头款式供选择
- 根据使用方式和将灯头拉出和缩进去选择功能
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制

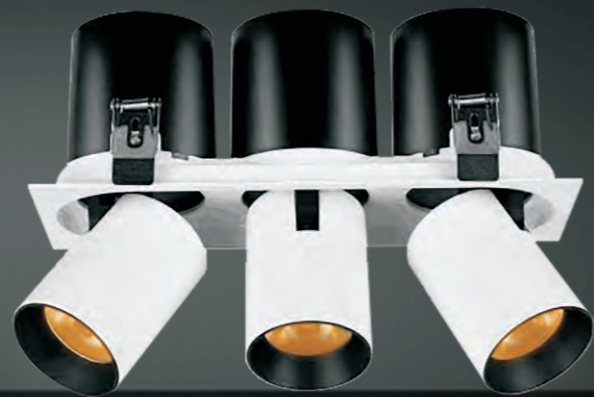

CITIZEN COB



SDCM <3



3*25W



Color Black/White



15° /24° /36°



120*335mm



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

POT130-3*25 Series


PO Series Recessed Spotlight to meet any applications includes Hotel, Shopping Mall , Hospital , Metro Station,Apartment etc. Glare free UGR<19. No flickery , 5 Years warranty for options. Life time over 50,000hrs.

Operation temperature -25℃~+50℃.


PO 系列嵌入式射灯可广泛应用于酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25℃~+50℃。



Dimensions 产品尺寸 (Unit: mm)

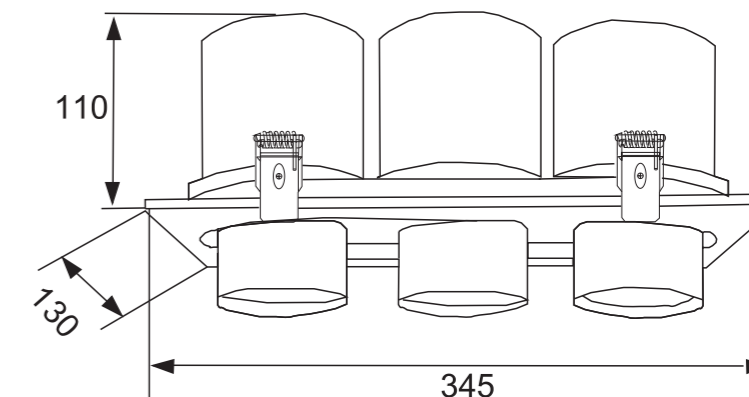


Photometric Diagram 光度分布图



m	lux	cm
1.0	10922	63
2.0	2282	125
3.0	755	188
4.0	423	251

3*25W 36° 2700K CRI>90



m	lux	cm
1.0	11530	62
2.0	2513	124
3.0	786	187
4.0	453	249

3*25W 36° 3000K CRI>90

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
POT130-3*25-927XY	3*25W	1800mA	2700K	15° 6375lm/24° 6288lm/36° 6201lm	>90	≥0.9
POT130-3*25-930XY	3*25W	1800mA	3000K	15° 6665lm/24° 6587lm/36° 6423lm	>90	≥0.9
POT130-3*25-940XY	3*25W	1800mA	4000K	15° 6825lm/24° 6738lm/36° 6695lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

TRACK LIGHT SERIES

轨道灯系列

Model.型号

RT80
RT80P
RT95
RT95P
RT95N
RT95NP

Power.功率

15 / 20 / 28W
15 / 20 / 28W
30 / 35 / 40 W
30 / 35 W
15 / 20 / 25 / 35 W
15 / 20 / 25 / 35 W




Advantages 产品优势

- High quality citizen COB, CRI>90, SDCM<3
- Advanced design of ultra-thin hybrid optical lens, with first-rate lighting control effect
- A variety of spot shapes due to optical accessories, to meet the different lighting demand
- Anti-glare design with different anti-glare accessories
- Modularity structure, easier to assemble, install and disassemble
- Long life, >50,000 hours, 5 years warranty


- 高品质西铁城光源, 显指大于90, 低色容差SDCM小于3
- 先进的超薄光效透镜, 极佳的照明控制效果
- 各种不同的光学变光片配件来满足不同的照明需求
- 防眩设计, 配有各种不同的防眩配件
- 模块化结构, 易于组装、安装和拆卸
- 使用寿命>50,000小时, 5年质保



Dimensions 产品尺寸 (Unit: mm)

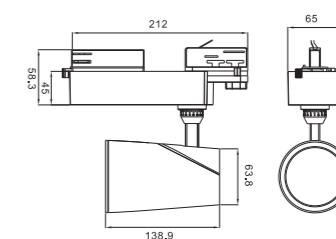

Photometric Diagram 光度分布图

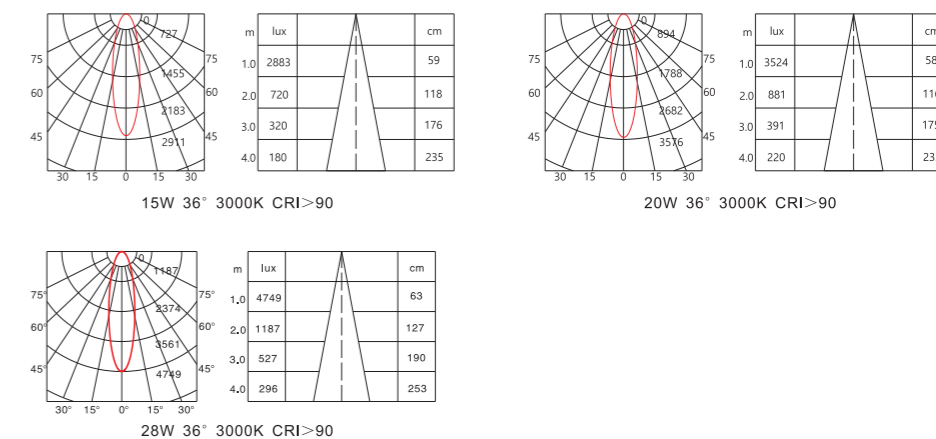

CITIZEN COB



Color Black/White



SDCM <3



15W/20W/28W



12° / 22° / 36°



CRI >90



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

RT80 Series

RT80 series track spotlights use high-purity aluminum radiator, good heat treatment, long service life; Japan imported Citizen LED, high index, high luminous efficiency, low color tolerance; products meet international certification standards; rich optical dimming Accessories, can achieve a variety of lighting effects through simple lens replacement; a variety of beam angles are optional; bracket unique scale design, convenient for precise angle adjustment; flexible body rotation, horizontal 355°, vertical 90° adjustment; support for thyristor 0-10V, DALI dimming, energy-saving custom lighting; the whole lamp can be removed and replaced by hand, easy to install, can meet the high-end lighting needs of shops, clubs, furniture stores, museums and other places.

RT80系列轨道射灯使用高纯度铝散热器, 良好的散热处理, 超长使用寿命; 日本进口西铁城LED, 高显指, 高光效, 低色容差; 产品符合国际认证标准; 丰富的光学变光配件, 可以通过简单的镜片更换达到多种照明效果; 多种光束角可选; 支架独有刻度设计, 方便精准角度调节; 灯体旋转灵活, 水平355°, 垂直90°调节; 支持可控硅、0-10V、DALI调光, 实现节能定制照明; 整灯可徒手拆卸更换, 安装方便, 能满足店铺、会所、家具店、博物馆等不同场所高端照明需求。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT8015-930XY	15W	360mA	3000K	12° 1328lm/22° 1296lm/36° 1222lm	>90	≥0.95
RT8020-930XY	20W	480mA	3000K	12° 1684lm/22° 1586lm/36° 1533lm	>90	≥0.95
RT8025-930XY	28W	700mA	3000K	12° 2241lm/22° 2200lm/36° 2174lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality citizen COB, CRI>90, SDCM<3
- Advanced design of ultra-thin hybrid optical lens, with first-rate lighting control effect
- Avariety of spot shapes due to optical accessories, to meet the different lighting demand
- Anti-glare design with different anti-glare accessories
- Modularity structure, easier to assemble, install and disassemble
- Long life, >50,000 hours, 5 years warranty

- 高品质西铁城光源, 显指大于90, 低色容差SDCM小于3
- 先进的超薄光效透镜, 极佳的照明控制效果
- 各种不同的光学变光片配件来满足不同的照明需求
- 防眩设计, 配有各种不同的防眩配件
- 模块化结构, 易于组装、安装和拆卸
- 使用寿命>50,000小时, 5年质保



CITIZEN COB



Color Black/White



SDCM <3



15W/20W/28W



12° / 22° / 36°



CRI >90



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保


RT80P Series

RT80P series track spotlights use high-purity aluminum radiator, good heat treatment, long service life; Japan imported Citizen LED, high index, high luminous efficiency, low color tolerance; products meet international certification standards; rich optical dimming Accessories, can achieve a variety of lighting effects through simple lens replacement; a variety of beam angles are optional; bracket unique scale design, convenient for precise angle adjustment; flexible body rotation, horizontal 355°, vertical 90° adjustment; support for support none dimmable, DALI dimmable, energy-saving custom lighting; the whole lamp can be removed and replaced by hand, easy to install, can meet the high-end lighting needs of shops, clubs, furniture stores, museums and other places.


RT80P系列轨道射灯使用高纯度铝散热器, 良好的散热处理, 超长使用寿命; 日本进口西铁城LED, 高显指, 高光效, 低色容差; 产品符合国际认证标准; 丰富的光学变光配件, 可以通过简单的镜片更换达到多种照明效果; 多种光束角可选; 支架独有刻度设计, 方便精准角度调节; 灯体旋转灵活, 水平355°, 垂直90°调节; 支持不调光, DALI调光, 实现节能定制照明; 整灯可徒手拆卸更换, 安装方便, 能满足店铺、会所、家具店、博物馆等不同场所高端照明需求。



Dimensions 产品尺寸 (Unit: mm)

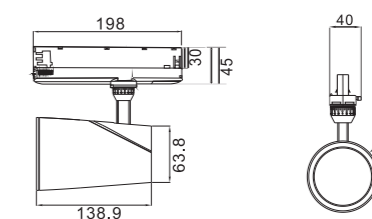

Photometric Diagram 光度分布图

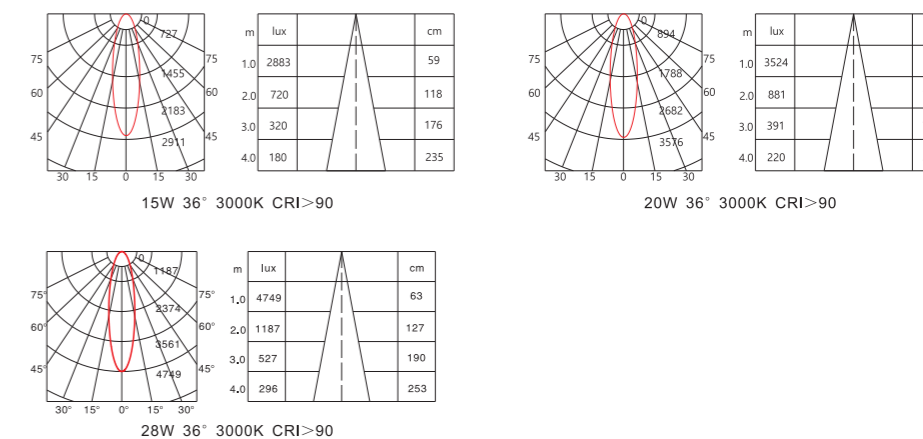


Order Information 产品信息


Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT8015P-930XY	15W	360mA	3000K	12° 1328lm/22° 1296lm/36° 1222lm	>90	≥0.95
RT8020P-930XY	20W	480mA	3000K	12° 1684lm/22° 1586lm/36° 1533lm	>90	≥0.95
RT8025P-930XY	28W	700mA	3000K	12° 2241lm/22° 2200lm/36° 2174lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Adsorbed optics lens
可选光学变光片
RT80

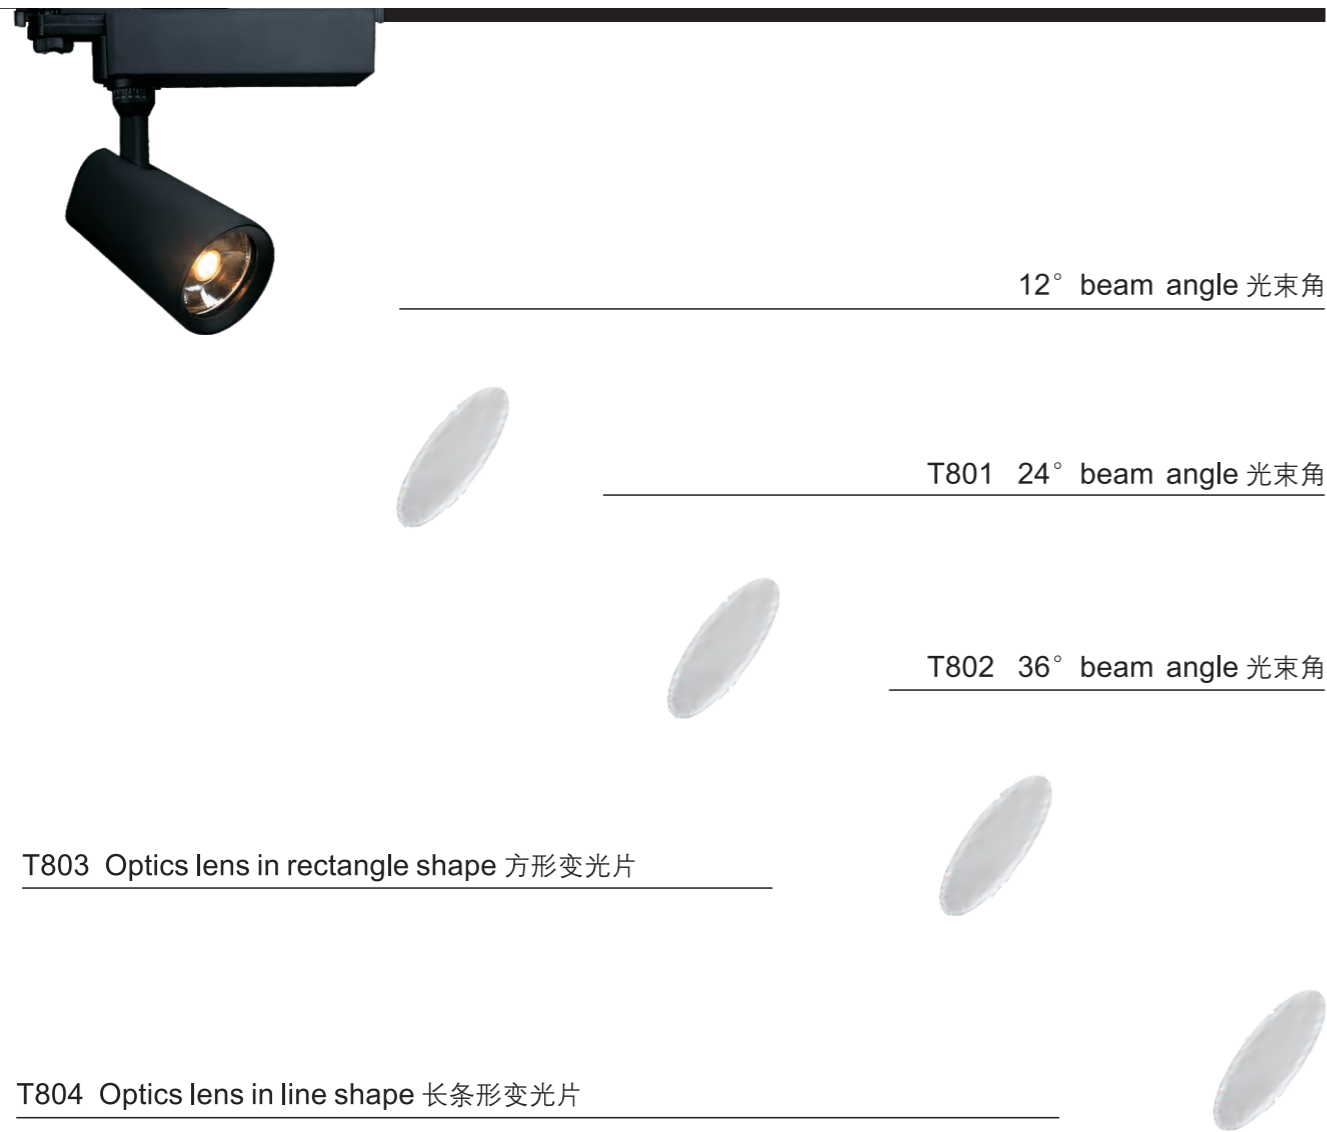

Different diffuser make different light spot shape 不同变光片不同光斑形状效果

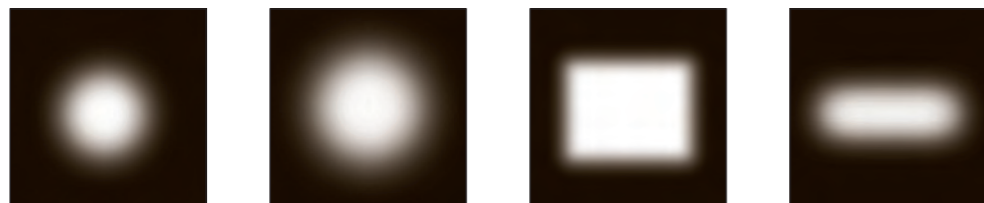

The Perfect Replace 替代金属卤素灯
Metal Halide 35W/70W 35W/70W
RT95

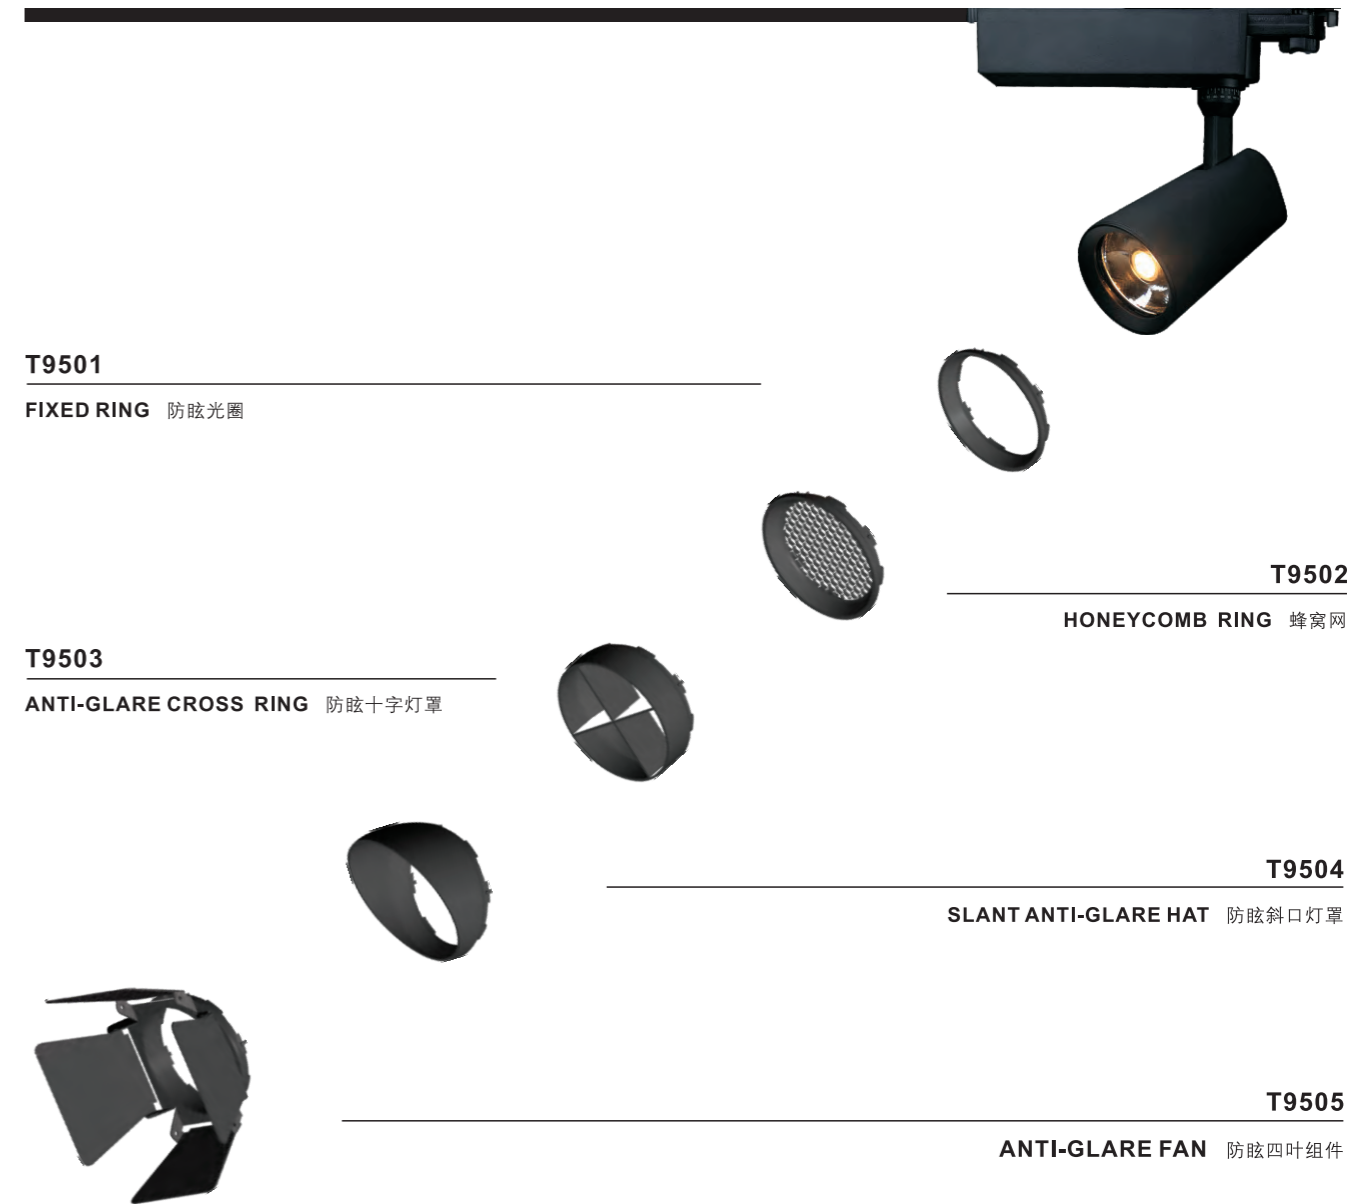


Advantages 产品优势

- High quality citizen COB, CRI>90, SDCM<3
- Advanced design of ultra-thin hybrid optical lens, with first-rate lighting control effect
- Avariety of spot shapes due to optical accessories, to meet the different lighting demand
- Anti-glare design with different anti-glare accessories
- Modularity structure, easier to assemble, install and disassemble
- Long life, >50,000 hours, 5 years warranty


- 高品质西铁城光源, 显指大于90, 低色容差SDCM小于3
- 先进的超薄光效透镜, 极佳的照明控制效果
- 各种不同的光学变光片配件来满足不同的照明需求
- 防眩设计, 配有各种不同的防眩配件
- 模块化结构, 易于组装、安装和拆卸
- 使用寿命>50,000小时, 5年质保



Dimensions 产品尺寸 (Unit: mm)

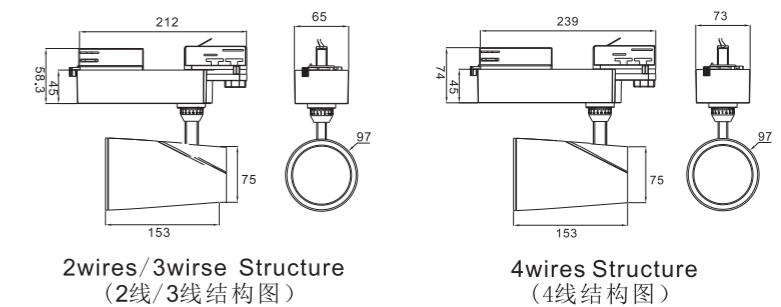

Photometric Diagram 光度分布图

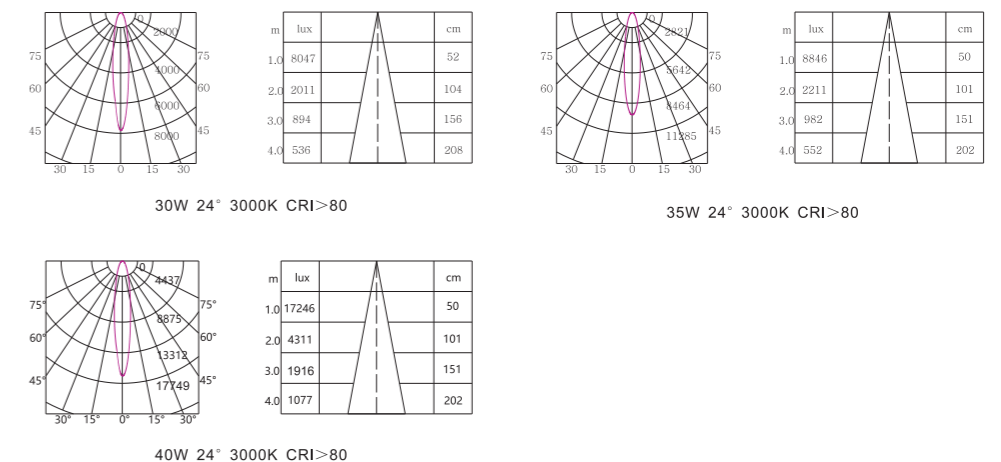

	CITIZEN COB		Color Black/White		SDCM <3
	30W/35W/40W		12° /24° /36°		CRI >90
	AC100-240/220-240V 50/60Hz		5 Years Warranty 5年质保		

RT95 Series

RT95 series track spotlights use high-purity aluminum radiator, good heat treatment, long service life; Japan imported Citizen LED, high index, high luminous efficiency, low color tolerance; products meet international certification standards;a full range of anti-glare accessories can be used with achieve a variety of anti-glare effects; a variety of beam angles are optional; the bracket has a unique scale design, convenient for precise angle adjustment; the lamp body is flexible, horizontal 355°, vertical 90° adjustment; support thyristor, 0-10V, DALI dimming, to achieve energy-saving custom lighting; the whole lamp can be removed and replaced by hand, easy to install, powerful, to meet the high-end lighting needs of shops, clubs, furniture stores, museums and other places.

RT95系列轨道射灯使用高纯度铝散热器, 良好的散热处理, 超长使用寿命; 日本进口西铁城LED, 高显指, 高光效, 低色容差; 产品符合国际认证标准; 种类齐全的防眩配件, 可随心搭配达到多种防眩效果; 多种光束角可选; 支架独有刻度设计, 方便精准角度调节; 灯体旋转灵活, 水平355°, 垂直90° 调节; 支持可控硅、0-10V、DALI调光, 实现节能定制照明; 整灯可徒手拆卸更换, 安装方便, 能满足店铺、会所、家具店、博物馆等不同场所高端照明需求。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT9530-930XY RT9530-940XY	30W	720mA	3000K 4000K	12° 2840lm/24° 2728lm 12° 2934lm/24° 2810lm	>80	≥0.95
RT9535-930XY RT9535-940XY	35W	850mA	3000K 4000K	12° 3125lm/24° 3001lm 12° 3260lm/24° 3156lm	>80	≥0.95
RT9540-930XY RT9540-940XY	40W	960mA	3000K 4000K	12° 3586lm/24° 3820lm 12° 3750lm/24° 3835lm	>80	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality citizen COB, CRI>90, SDCM<3
- Advanced design of ultra-thin hybrid optical lens, with first-rate lighting control effect
- Avariety of spot shapes due to optical accessories, to meet the different lighting demand
- Anti-glare design with different anti-glare accessories
- Modularity structure, easier to assemble, install and disassemble
- Long life, >50,000 hours, 5 years warranty

- 高品质西铁城光源, 显指大于90, 低色容差SDCM小于3
- 先进的超薄光效透镜, 极佳的照明控制效果
- 各种不同的光学变光片配件来满足不同的照明需求
- 防眩设计, 配有各种不同的防眩配件
- 模块化结构, 易于组装、安装和拆卸
- 使用寿命>50,000小时, 5年质保



CITIZEN COB



Color Black/White



SDCM <3



30W/35W



12° /24° /36°



CRI >90



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保


RT95P Series

RT95P series track spotlights use high-purity aluminum radiator, good heat treatment, long service life; Japan imported Citizen LED, high index, high luminous efficiency, low color tolerance; products meet international certification standards;a full range of anti-glare accessories can be used with achieve a variety of anti-glare effects; a variety of beam angles are optional; the bracket has a unique scale design, convenient for precise angle adjustment; the lamp body is flexible, horizontal 355°, vertical 90° adjustment; support for none dimmable DALI dimmable, to achieve energy-saving custom lighting; the whole lamp can be removed and replaced by hand, easy to install, powerful, to meet the high-end lighting needs of shops, clubs, furniture stores, museums and other places.

RT95P系列轨道射灯使用高纯度铝散热器, 良好的散热处理, 超长使用寿命; 日本进口西铁城LED, 高显指, 高光效, 低色容差; 产品符合国际认证标准; 种类齐全的防眩配件, 可随心搭配达到多种防眩效果; 多种光束角可选; 支架独有刻度设计, 方便精准角度调节; 灯体旋转灵活, 水平355°, 垂直90°调节; 支持不调光, DALI调光, 实现节能定制照明; 整灯可徒手拆卸更换, 安装方便, 能满足店铺、会所、家具店、博物馆等不同场所高端照明需求。




Dimensions 产品尺寸 (Unit: mm)

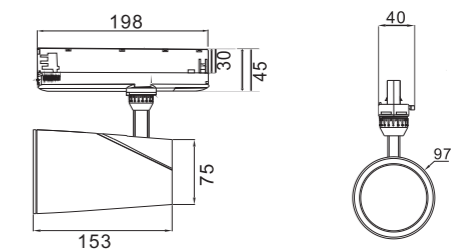


3wires/4wirse Structure
(3线/4线结构图)

Photometric Diagram 光度分布图



30W 24° 3000K CRI>80



35W 24° 3000K CRI>80

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT9530P-930XY RT9530P-940XY	30W	720mA	3000K 4000K	12° 2840lm/24° 2728lm 12° 2934lm/24° 2810lm	>90	≥0.95
RT9535P-930XY RT9535P-940XY	35W	850mA	3000K 4000K	12° 3125lm/24° 3001lm 12° 3260lm/24° 3156lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- LENS & Reflector for options
- Anti-glare Accessories is available
- The light shape could be square, oval and linear.
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : None/0-10V/Dali/Wifi dimmable
- CCT dimmable is available : 2700K-6000K
- Customized function is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有透镜和反光杯款式方形供选择
- 防眩配件可自由更换
- 光斑由方形，椭圆和线性选择
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：不调光/0-10V调光/Dali调光/Wifi调光
- 调色温可选：2700K-6000K
- 接受定制




- | | | | | | |
|--|--|--|---------------------------------------|--|---------------------------|
| | CITIZEN COB | | SDCM <3 | | Depth anti-glare (深度防眩) |
| | 15W/20W/25W/35W | | Color Black/White(黑/白) | | High luminous flux (高效配光) |
| | 15°/24°/36°(Lens 透镜)
18°/24°/38°/45°/60°(Reflector 反光杯) | | CRI >90 | | 5 Years Warranty (5年质保) |
| | AC100-240/220-240V 50/60Hz | | Various optics accessories (丰富的光学配件) | | Nonradiative(无辐射) |
| | 1-Phase/3-Phase 2/3/4wirse (1相/3相 2/3/4线) | | Good heat dissipation (完美的散热处理) | | CCT 2700K-6000K |
| | 355° in horizontal(水平旋转355°) | | 90° Adjustable in vertical (可垂直90°调节) | | IP IP20 |
| | None/0-10V/Dali/Wifi dimmable | | Lifespan(超长寿命>50000hrs.) | | |

RT95N Series


RT95N series track spotlights use high-purity aluminum radiator, good heat treatment, long service life; Japan imported Citizen LED, high index, high luminous efficiency, low color tolerance; products meet international certification standards; rich optical dimming Accessories can be used to achieve a variety of spot requirements through simple lens replacement; the unique lens and reflector can be easily replaced to meet the needs of different users for the different shapes of the lens and the light cup; a full range of anti-glare accessories can be used with achieve a variety of anti-glare effects; a variety of beam angles are optional; the bracket has a unique scale design, convenient for precise angle adjustment; the lamp body is flexible, horizontal 355°, vertical 90° adjustment; support thyristor, 0-10V, DALI dimming, to achieve energy-saving custom lighting; the whole lamp can be removed and replaced by hand, easy to install, powerful, to meet the high-end lighting needs of shops, clubs, furniture stores, museums and other places.

RT95N系列轨道射灯使用高纯度铝散热器，良好的散热处理，超长使用寿命；日本进口西铁城LED，高显指，高光效，低色容差；产品符合国际认证标准；丰富的光学变光配件，可以通过简单的镜片更换达到多种光斑需求；独有的透镜与反光杯便捷更换设计，可轻松满足不同用户对透镜和光杯不同光形的挑剔；种类齐全的防眩配件，可随心搭配达到多种防眩效果；多种光束角可选；支架独有刻度设计，方便精准角度调节；灯体旋转灵活，水平355°，垂直90°调节；支持可控硅、0-10V、DALI调光，实现节能定制照明；整灯可徒手拆卸更换，安装方便，功能强大，能满足店铺、会所、家具店、博物馆等不同场所高端照明需求。

Dimensions 产品尺寸

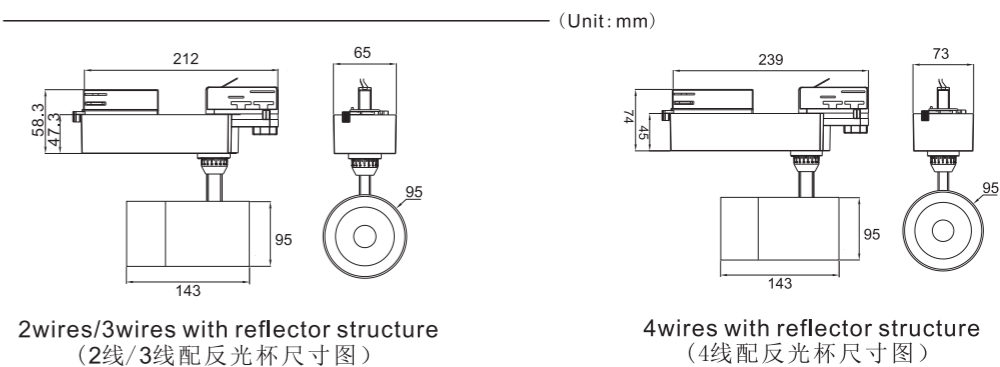

Photometric Diagram 光度分布图

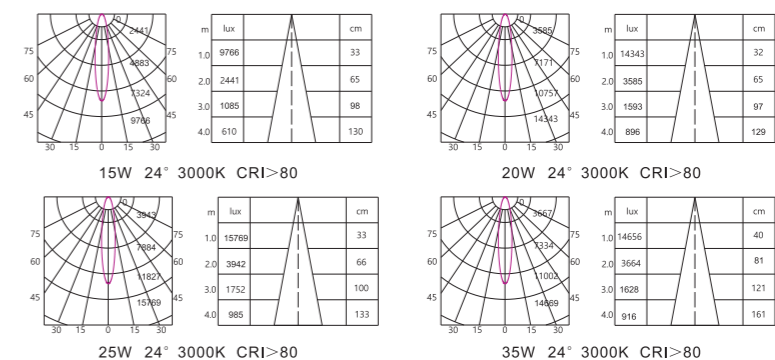

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT9515N-930	15W	360mA	3000K	15° 1268lm/24° 1263lm/36° 1320lm	>90	≥0.96
RT9520N-930	20W	480mA	3000K	15° 1949lm/24° 1902lm/36° 1897lm	>90	≥0.96
RT9525N-930	25W	600mA	3000K	15° 2195lm/24° 2129lm/36° 2143lm	>90	≥0.96
RT9535N-930	35W	850mA	3000K	15° 3031lm/24° 3068lm/36° 3055lm	>90	≥0.96

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- LENS & Reflector for options
- Anti-glare Accessories is available
- The light shape could be square, oval and linear.
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line.
- Dimmable type : None/Dali/Wifi dimmable
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized function is available

- 所有配件均由KWT自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有透镜和反光杯款式方形供选择
- 防眩配件可自由更换
- 光斑由方形，椭圆和线性选择
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：不调光/Dali调光
- 调色温可选：2700K-6000K
- 接受定制



Reflector (反光杯) Lens (透镜)



CITIZEN COB



SDCM <3



Depth anti-glare (深度防眩)



15W/20W/25W/35W



Color Black/White(黑 / 白)



High luminous flux (高效配光)



15°/24°/36°(Lens 透镜)
18°/24°/38°/45°/60°(Reflector 反光杯)



CRI >90



5 Years Warranty (5年质保)



AC100-240/220-240V 50/60Hz



Various optics accessories (丰富的光学配件)



Nonradiative(无辐射)



1-Phase/3-Phase 2/3/4wire (1相/3相 2/3/4线)



Good heat dissipation (完美的散热处理)



CCT 2700K-6000K



355° in horizontal(水平旋转355°)



90° Adjustable in vertical (可垂直90° 调节)



IP IP20



None dimmable/Dali dimmable




Lifespan(超长寿命>50000hrs.)

RT95NP Series


RT95NP series track spotlights use high-purity aluminum radiator, good heat treatment, long service life; Japan imported Citizen LED, high index, high luminous efficiency, low color tolerance; products meet international certification standards; rich optical dimming Accessories can be used to achieve a variety of spot requirements through simple lens replacement; the unique lens and reflector can be easily replaced to meet the needs of different users for the different shapes of the lens and the light cup; a full range of anti-glare accessories can be used with achieve a variety of anti-glare effects; a variety of beam angles are optional; the bracket has a unique scale design, convenient for precise angle adjustment; the lamp body is flexible, horizontal 355°, vertical 90° adjustment; support for none dimmable, DALI dimmable, to achieve energy-saving custom lighting; the whole lamp can be removed and replaced by hand, easy to install, powerful, to meet the high-end lighting needs of shops, clubs, furniture stores, museums and other places.

RT95NP系列轨道射灯使用高纯度铝散热器，良好的散热处理，超长使用寿命；日本进口西铁城LED，高显指，高光效，低色容差；产品符合国际认证标准；丰富的光学变光配件，可以通过简单的镜片更换达到多种光斑需求；独有的透镜与反光杯便捷更换设计，可轻松满足不同用户对透镜和光杯不同光形的挑剔；种类齐全的防眩配件，可随心搭配达到多种防眩效果；多种光束角可选；支架独有刻度设计，方便精准角度调节；灯体旋转灵活，水平355°，垂直90°调节；支持不调光、DALI调光，实现节能定制照明；整灯可徒手拆卸更换，安装方便，功能强大，能满足店铺、会所、家具店、博物馆等不同场所高端照明需求。

Dimensions 产品尺寸

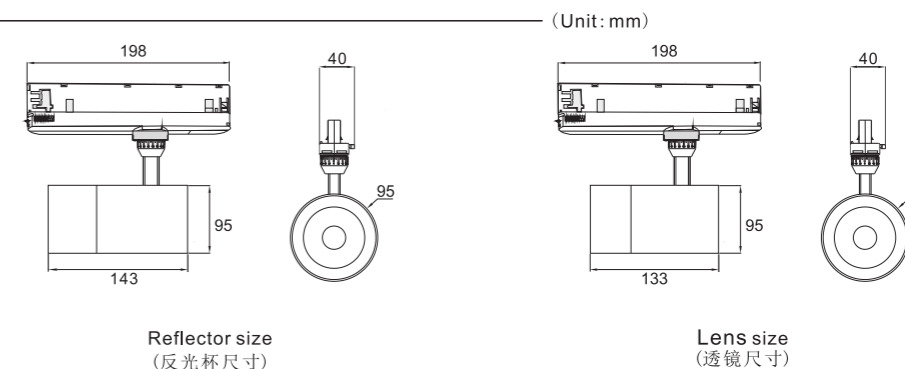

Photometric Diagram 光度分布图

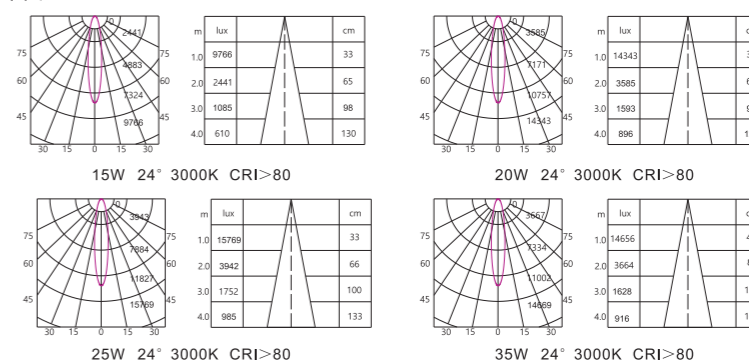

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT9515NP-930	15W	360mA	3000K	15° 1268lm/24° 1263lm/36° 1320lm	>90	≥0.96
RT9520NP-930	20W	480mA	3000K	15° 1949lm/24° 1902lm/36° 1897lm	>90	≥0.96
RT9525NP-930	25W	600mA	3000K	15° 2195lm/24° 2129lm/36° 2143lm	>90	≥0.96
RT9535NP-930	35W	850mA	3000K	15° 3031lm/24° 3068lm/36° 3055lm	>90	≥0.96


Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Optical accessories(光学配件)





Different diffuser make different light spot shape 不同变光片不同光斑形状效果

Optics lens in round shape
圆形光斑效果

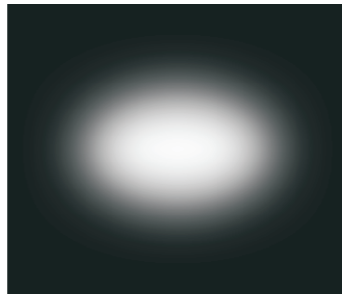

Optics lens in elliptic shape
椭圆形光斑效果


Optics lens in rectangle shape
方形光斑效果

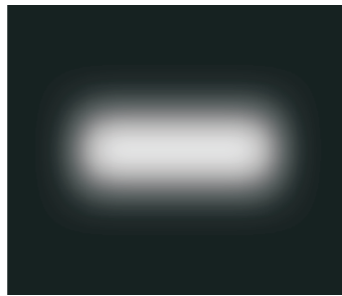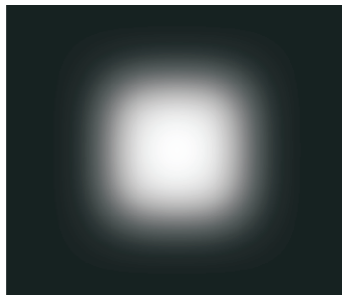


Optics lens in line shape
长形光斑效果

Beam angle(光束角)


Multiple beam angles to choose from 多种光束角供选择。

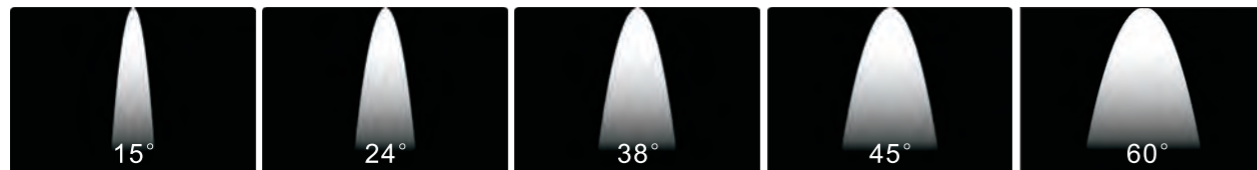

Anti-glare accessories(防眩配件)



The hidden position of the light source and the optical accessories provided prevent glare, provide a comfortable light environment and protect your eyes. Can be used alone or with a variety of dimmers
光源的隐藏位置和所提供的光学附件能防止眩光，提供舒适的光环境，呵护你的双眼。可单独使用，或搭配各种变光片。

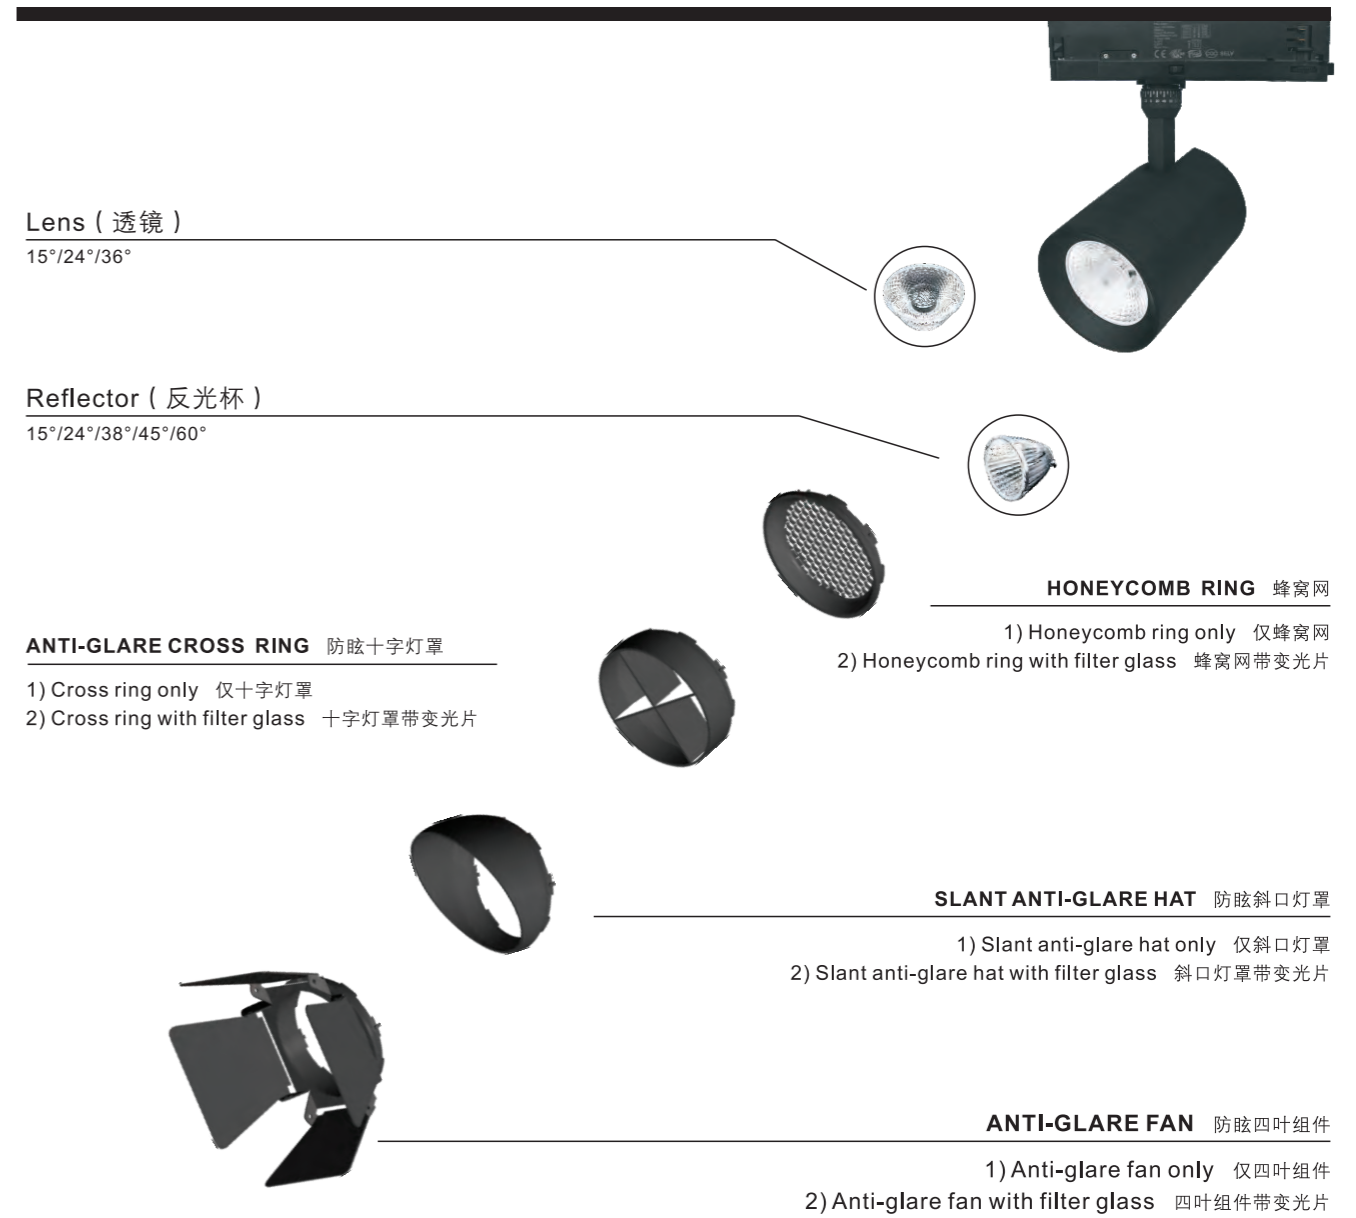

TRACK LIGHT SERIES

轨道灯系列

Model.型号

RT55

Power.功率

8 / 12 / 15W





Advantages 产品优势

- High Ra > 90, Low SDCM < 3
- High efficiency, high illuminance
- Glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination
- Non-flicker driver for superior surrounding lighting requirement
- Integrated molded light housing with convective holes for better heat dissipation, interior driver, low-temperature operation guaranteed
- Refined components and design, guarantee a long life span of over 40,000 hours
- Rotatable horizontal 355° and vertical 90°
- 高显指大于90, 低色容差SDCM小于3
- 高光效, 高亮度
- 防眩设计, 光斑均匀并光束角精准来制造舒适的照明环境
- 使用无频闪电源去达到优质的照明环境需求
- 使用对流散热孔的一体式散热器来实现更好的散热, 内置恒流驱动电源, 低温, 确保品质需求
- 精致的部件和设计, 保证使用寿命超过40,000小时
- 水平可旋转355° 和垂直90°











RT55-B
Black fixed ring
(黑色防眩圈)



RT55-W
White fixed ring
(白色防眩圈)



RT55-E
Gold fixed ring
(金色防眩圈)

- | | | | |
|---|----------------------------|---|--------------------------|
|  | CITIZEN COB |  | SDCM < 3 |
|  | 8W/12W/15W |  | Color Black/White |
|  | 12° / 22° / 36° |  | CRI > 90 |
|  | AC100-240/220-240V 50/60Hz |  | 5 Years Warranty
5年质保 |


RT55 Series

RT55 Series originally researched and developed by KWT, high-end spotlight with interior driver. 55mm diameter face cover, integrated molded lamp housing of CNC aluminum, use international top COB CITIZEN chip. Advanced design of ultra-thin hybrid optical lens, with first-rate lighting control effect, various beam angle 12°, 22°, 36° for option, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.


RT55系列采用高导热的铝散热器, 高品质西铁城光源, 防眩光透镜, 可匹配白色、黑色、金色三种反光杯, 内置恒流驱动电源, 可旋转水平355° 和垂直90°, 以满足不同的需求。防眩光的设计, 完美的光斑和准确的光束角度, 营造舒适的光环境。整灯寿命超过40,000小时的使用寿命。



Dimensions 产品尺寸 (Unit: mm)

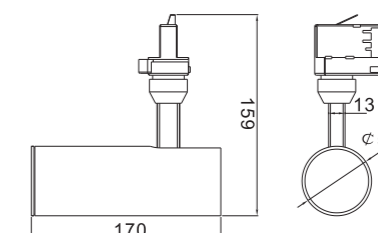

Photometric Diagram 光度分布图

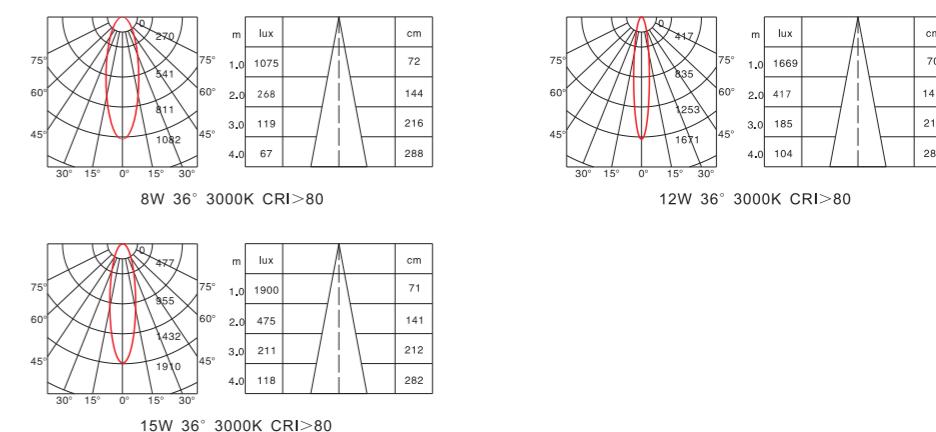

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT5508-930XY RT5508-940XY	8W	210mA	3000K 4000K	12° 652lm/22° 656lm/36° 631lm 12° 680lm/22° 700lm/36° 654lm	>90	≥0.95
RT5512-930XY RT5512-940XY	12W	330mA	3000K 4000K	12° 1012lm/22° 986lm/36° 958lm 12° 1101lm/22° 1002lm/36° 1006lm	>90	≥0.95
RT5515-930XY RT5515-940XY	15W	400mA	3000K 4000K	12° 1166lm/22° 1119lm/36° 1068lm 12° 1232lm/22° 1202lm/36° 1147lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) Y=B(Black) Y=W(White)

TRACK LIGHT SERIES

轨道灯系列

Model.型号

RT76
RT105-A
RT105-B

Power.功率

15 / 20W
30 / 35 / 45 / 56W
30 / 35 / 45 / 56W



Advantages 产品优势

- High Ra > 90, Low SDCM < 3
- High efficiency, high illuminance
- Glare-free design, perfect light spot and accurate beamangle, make surroundings of comfortable illumination
- Refined components and design, guarantee a long life span of over 40,000 hours
- Rotatable horizontal 355° and vertical 180°
- Perfect combination of spherical heat sink and cambered driver box, smooth and concise appearance, fit for different occasions

- 高显指大于90, 低色容差SDCM小于3
- 高亮度, 高照度
- 无眩光设计, 完美的光点和准确的束角, 使周围环境舒适
- 精美的部件和设计, 保证使用寿命长超过40,000小时
- 可旋转水平355°和垂直180°, 以满足不同的需求
- 高纯度铝散热器与弧形驱动盒完美结合, 外观光滑简洁, 适合不同场合



CITIZEN COB



SDCM <3



15W/20W



Color Black/White



12° /24° /40°



CRI >90



AC 220-240V 50/60Hz



5 YEAR 5 Years Warranty 5年质保


RT76 Series

RT76 Series originally researched and developed by KWT, high-rank aluminum integrated heat sink. Driver shell of fire-proof PC material, international top COB CITIZEN chip, combined with KWT exclusive optical system of glare-free lens, standard driver originally researched and developed by KWT, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.


RT76系列由金瓦特自主研发, 采用高纯度的铝散热器, 防火PC材料驱动外壳, 高品质西铁城光源, 结合金瓦特专用光学系统防眩光透镜, 搭配金瓦特高品质恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。



Dimensions 产品尺寸 (Unit: mm)

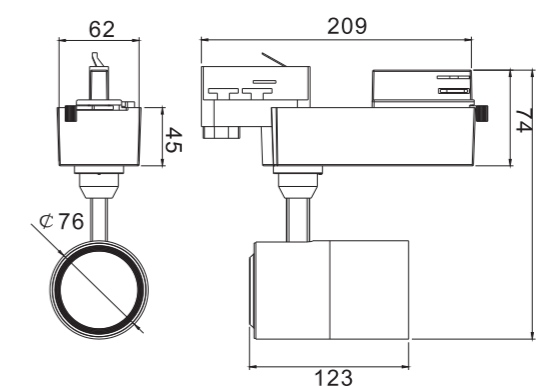

Photometric Diagram 光度分布图

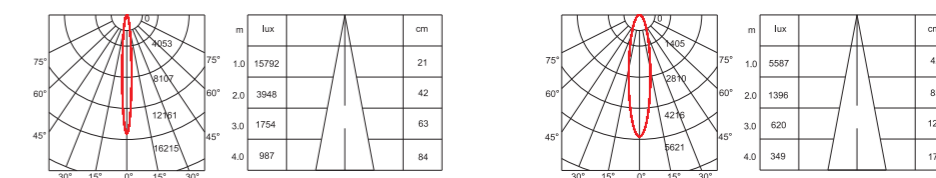

15W 24° 3000K CRI>90

20W 24° 3000K CRI>90

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT7615-930XY RT7615-940XY	15W	360mA	3000K 4000K	12° 1181lm/24° 1225lm/40° 1184lm 12° 1229lm/24° 1347lm/40° 1302lm	>90	≥0.95
RT7620-930XY RT7620-940XY	20W	480mA	3000K 4000K	12° 1559lm/24° 1537lm/40° 1543lm 12° 1714lm/24° 1690lm/40° 1697lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- High Ra > 90, Low SDCM < 3
- High efficiency, high illuminance
- Glare-free design, perfect light spot and accurate beamangle, make surroundings of comfortable illumination
- Refined components and design, guarantee a long life span of over 40,000 hours
- Rotatable horizontal 355° and vertical 180°
- Perfect combination of spherical heat sink and cambered driver box, smooth and concise appearance, fit for different occasions


- 高显指大于90, 低色容差SDCM小于3
- 高亮度, 高照度
- 无眩光设计, 完美的光点和准确的束角, 使周围环境舒适
- 精美的部件和设计, 保证使用寿命长超过40,000小时
- 可旋转水平355°和垂直180°, 以满足不同的需求
- 高纯度铝散热器与弧形驱动盒完美结合, 外观光滑简洁, 适合不同场合



Dimensions 产品尺寸 (Unit:mm)

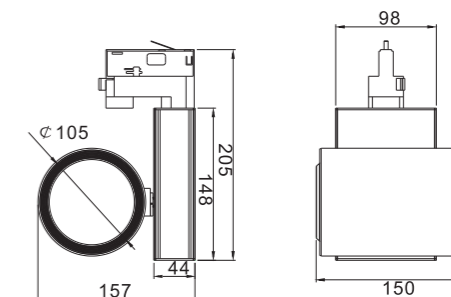

Photometric Diagram 光度分布图

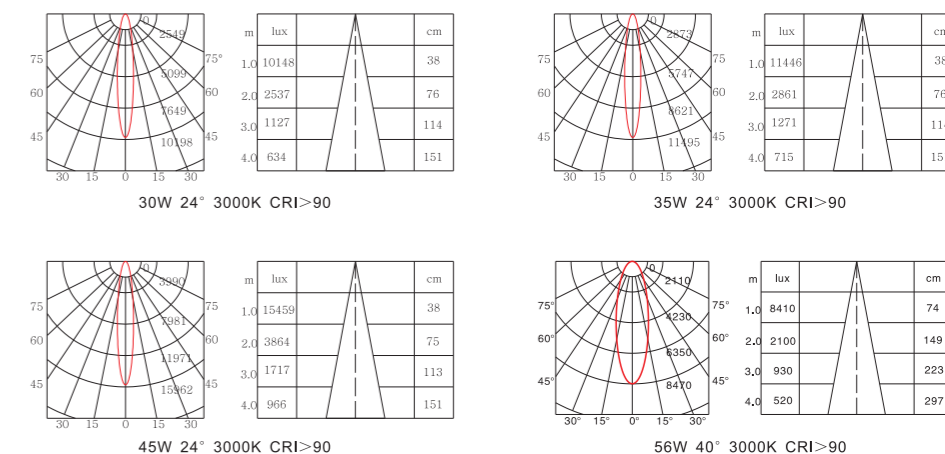

CITIZEN COB

SDCM <3



30W/35W/45W/56W

Color Black/White



12°/24°/40°/60°

CRI >90



AC100-240/220-240V 50/60Hz

5 YEAR 5 Years Warranty 5年质保

RT105-A Series

RT105-A Series originally researched and developed by KWT, aluminum integrated heat sink. Driver shell of refined CNC 6063 aluminum, international top COB CITIZEN chip, PET reflector, mirror-finish anodized, reflective rate>95%, High-grade translucent panels, transparent rate>93%, Standard driver originally researched and developed by KWT, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.

RT105-A系列由KWT自主研发, 6063铝合金散热器, 铝合金驱动外壳, 高品质西铁城光源, PC反光镜, 镜面抛阳极氧化, 反射率>95%, 高档透明面板, 透光率>93%, 搭配KWT高品质恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT10530A-930XY RT10530A-940XY	30W	720mA	3000K 4000K	12° 2722lm/24° 2679lm/40° 2668lm 12° 2980lm/24° 2961lm/40° 2940lm	>90	≥0.95
RT10535A-930XY RT10535A-940XY	35W	850mA	3000K 4000K	12° 2967lm/24° 3020lm/40° 2952lm 12° 3370lm/24° 3365lm/40° 3279lm	>90	≥0.95
RT10545A-930XY RT10545A-940XY	45W	1100mA	3000K 4000K	12° 4128lm/24° 4065lm/40° 3990lm 12° 4473lm/24° 4478lm/40° 4329lm	>90	≥0.95
RT10556A-930XY RT10556A-940XY	56W	1400mA	3000K 4000K	12° 5566lm/24° 5482lm/40° 5318lm 12° 6011lm/24° 5919lm/36° 5743lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- High Ra > 90, Low SDCM < 3
- High efficiency, high illuminance
- Glare-free design, perfect light spot and accurate beamangle, make surroundings of comfortable illumination
- Refined components and design, guarantee a long life span of over 40,000 hours
- Rotatable horizontal 355° and vertical 180°
- Perfect combination of spherical heat sink and cambered driver box, smooth and concise appearance, fit for different occasions

- 高显指大于90, 低色容差SDCM小于3
- 高亮度, 高照度
- 无眩光设计, 完美的光点和准确的束角, 使周围环境舒适
- 精美的部件和设计, 保证使用寿命超过40,000小时
- 可旋转水平355°和垂直180°, 以满足不同的需求
- 高纯度铝散热器与弧形驱动盒完美结合, 外观光滑简洁, 适合不同场合




Dimensions 产品尺寸 (Unit: mm)

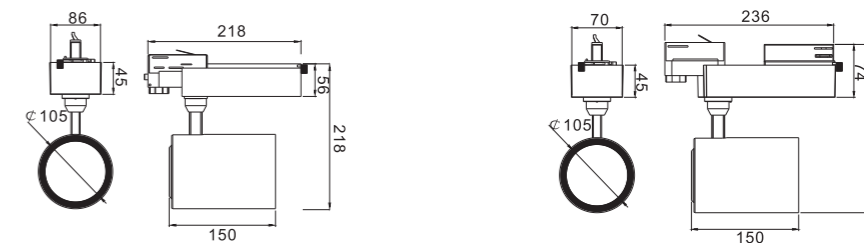

2wires/3wires Structure

4wires Structure

Photometric Diagram 光度分布图

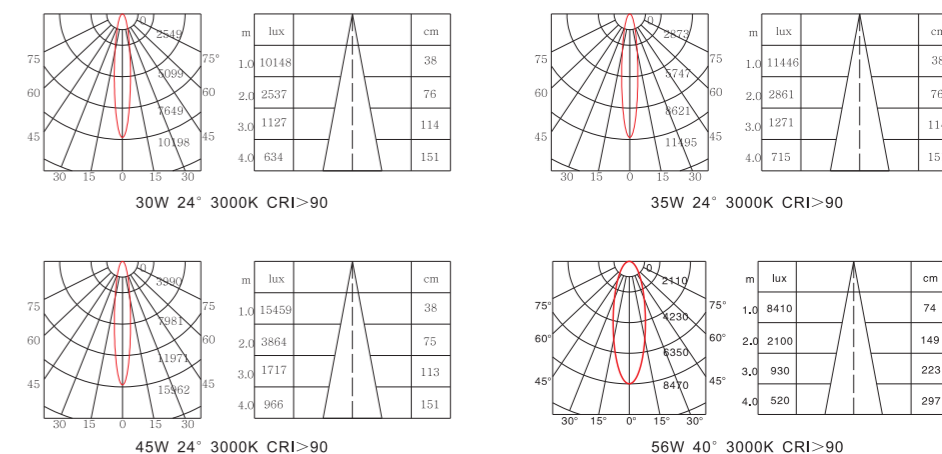

CITIZEN COB



SDCM < 3



30W/35W/45W/56W



Color Black/White



12°/24°/40°/60°



CRI > 90



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保

RT105-B Series

RT105-B Series originally researched and developed by KWT, aluminum integrated heat sink. Driver shell of refined CNC 6063 aluminum, international top COB CITIZEN chip, PET reflector, mirror-finish anodized, reflective rate>95%, High-grade translucent panels, transparent rate>93%, Standard driver originally researched and developed by KWT, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.

RT105-B系列由KWT自主研发, 6063铝合金散热器, DC电源驱动外壳, 高品质西铁城光源, PC反光镜, 镜面抛光阳极氧化, 反射率>95%, 高档透明面板, 透光率>93%, 搭配KWT高品质恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT10530B-930XY RT10530B-940XY	30W	720mA	3000K 4000K	12° 2722lm/24° 2679lm/40° 2668lm 12° 2980lm/24° 2961lm/40° 2940lm	>90	≥0.95
RT10535B-930XY RT10535B-940XY	35W	850mA	3000K 4000K	12° 2967lm/24° 3020lm/40° 2952lm 12° 3370lm/24° 3365lm/40° 3279lm	>90	≥0.95
RT10545B-930XY RT10545B-940XY	45W	1100mA	3000K 4000K	12° 4128lm/24° 4065lm/40° 3990lm 12° 4473lm/24° 4478lm/40° 4329lm	>90	≥0.95
RT10556B-930XY RT10556B-940XY	56W	1400mA	3000K 4000K	12° 5566lm/24° 5482lm/40° 5318lm 12° 6011lm/24° 5919lm/36° 5743lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

TRACK LIGHT SERIES

轨道灯系列

Model.型号

RT69
RT90
RT100

Power.功率

8 / 12 / 15W
20 / 25 / 30 / 35W
40 / 45W





Advantages 产品优势

- High Ra > 90, high efficacy, high luminosity, SDCM < 3, make surroundings of high-quality illumination
 - Glare-free design, perfect light spot with precise cast, make surroundings of comfortable illumination
 - Non-flicker design for superior surrounding lighting requirement
 - Integral light housing for better heat dissipation, built-in driver for low-temperature operation
 - Refined components and design, guarantee a long life span of over 40000 hours
- Ra大于90高显指、高光效，高照度，低色容差SDCM小于3，营造高质量光环境
 - 防眩光设计，光斑完美，角度精准，营造舒适光环境
 - 无频闪电源方案，满足更高端环境灯光需要
 - 一体化型材模具散热更好，电源内置也能保证低温工作
 - 选用材料及方案精益求精，保证灯具寿命更长，寿命大于40,000小时

- CITIZEN COB
- SDCM < 3
- 8W / 12W / 15W
- Color Black / White
- 15° / 24° / 36° / 60°
- CRI > 90
- AC100-240/220-240V 50/60Hz
- 5 YEAR 5 Years Warranty 5年质保


RT69 Series

Track light RT69 originally researched and developed by KWT, with inspiration from people's double eyelids, 69mm diameter face cover, integral lamp housing of module CNC aluminum, concise and fluent outlook, internationally top rank CITIZEN COB, plus oriented glare-free reflector and exclusive non-flicker driver, power range from 8w to 15w, ideal choice for royal family, high-end club, museum, and internationally known brands, e.g. Louis Vuitton, Prada, GUCCI, etc.


RT69系列为KWT完全自主研发的一款高端的电源内置式射灯，设计灵感来自于人类的双眼皮眼睛，灯体口径尺寸为69mm，整灯采用铝材模具一体成型，外型达到最简洁流畅。采用高品质西铁城光源，独特的防眩光反光杯光学设计，搭配内置恒流驱动电源，可调光，高效率，无频闪，是高端会所、博物馆等国际品牌连锁店的最佳灯具选择。



Dimensions 产品尺寸 (Unit: mm)

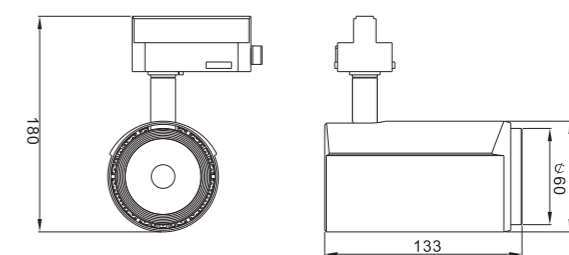

Photometric Diagram 光度分布图

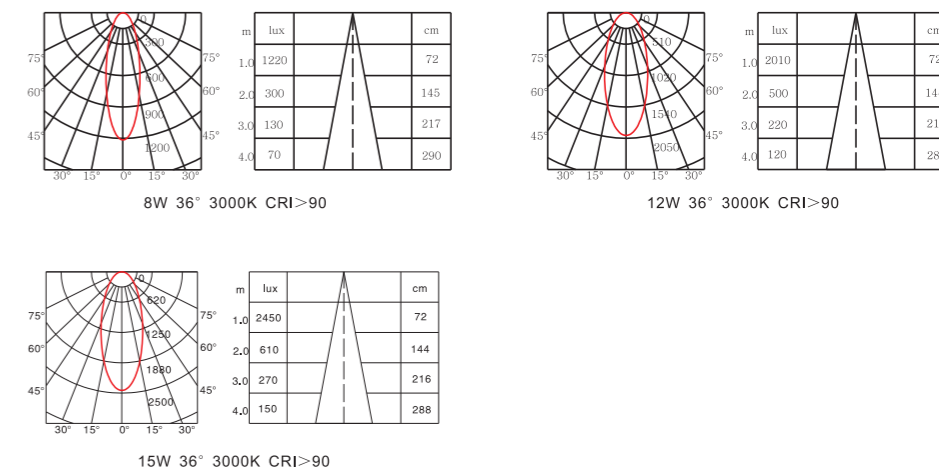

Order Information 产品信息









Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT6908-930XY RT6908-940XY	8W	190mA	3000K 4000K	15° 567lm/24° 556lm/36° 546lm 15° 682lm/24° 672lm/36° 651lm	>90	≥0.95
RT6912-930XY RT6912-940XY	12W	270mA	3000K 4000K	15° 924lm/24° 945lm/36° 892lm 15° 1060lm/24° 1081lm/36° 1029lm	>90	≥0.95
RT6915-930XY RT6915-940XY	15W	360mA	3000K 4000K	15° 1071lm/24° 1134lm/36° 1092lm 15° 1291lm/24° 1292lm/36° 1250lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) Y=B(Black) Y=W(White)



Advantages 产品优势

- High Ra > 90, high efficacy, high luminosity, SDCM < 3, make surroundings of high-quality illumination
 - Glare-free design, perfect light spot with precise cast, make surroundings of comfortable illumination
 - Non-flicker design for superior surrounding lighting requirement
 - Integral light housing for better heat dissipation, built-in driver for low-temperature operation
 - Refined components and design, guarantee a long life span of over 40000 hours
-
- Ra大于90高显指、高光效，高照度，低色容差SDCM小于3，营造高质量光环境
 - 防眩光设计，光斑完美，角度精准，营造舒适光环境
 - 无频闪电源方案，满足更高端环境灯光需要
 - 一体化型材模具散热更好，电源内置也能保证低温工作
 - 选用材料及方案精益求精，保证灯具寿命更长，寿命大于40,000小时

- | | | | |
|---|----------------------------|---|--------------------------|
|  | CITIZEN COB |  | <3 |
|  | 20W/25W/30W/35W |  | Black/White |
|  | 12° / 24° / 36° / 60° |  | >90 |
|  | AC100-240/220-240V 50/60Hz |  | 5 Years Warranty
5年质保 |


RT90 Series

Track light RT90 originally researched and developed by KWT, with inspiration from people's double eyelids, 90mm diameter face cover, integral lamp housing of module CNC aluminum, concise and fluent outlook, internationally top rank CITIZEN COB, plus oriented glare-free reflector and exclusive non-flicker driver, power range from 20w to 35w, ideal choice for royal family, high-end club, museum, and internationally known brands, e.g. Louis Vuitton, Prada, GUCCI, etc.


RT90系列为KWT完全自主研发的一款高端的电源内置式射灯，设计灵感来自于人类的双眼皮眼睛，灯体口径尺寸为90mm，整灯采用铝材模具一体成型，外型达到最简洁流畅。采用高品质西铁城光源，独特的防眩光反光杯光学设计，搭配内置恒流驱动电源，可调光，高效率，无频闪，是高端会所、博物馆等国际品牌连锁店的最佳灯具选择。



Dimensions 产品尺寸 (Unit: mm)

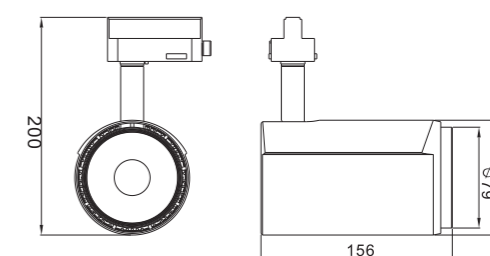

Photometric Diagram 光度分布图

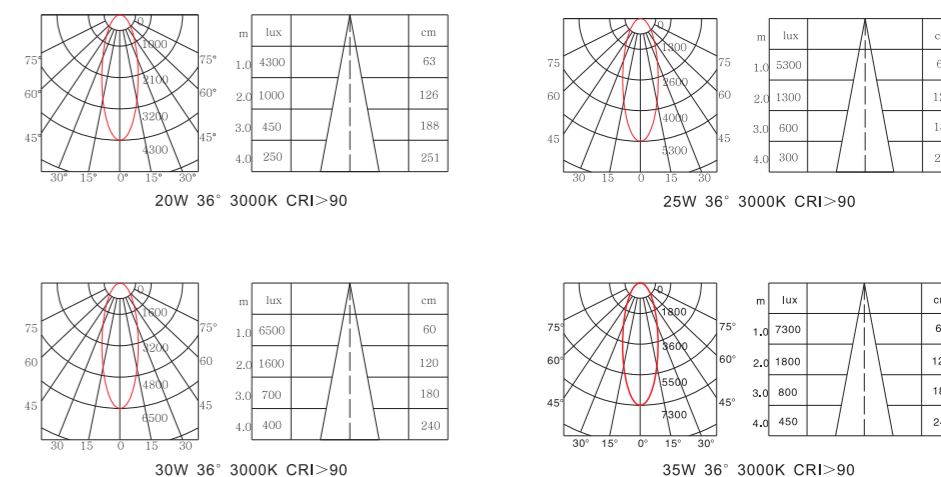

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT9020-930XY RT9020-940XY	20W	480mA	3000K 4000K	12° 1858lm/24° 1837lm/36° 1890lm 12° 2016lm/24° 2016lm/36° 2047lm	>90	≥0.95
RT9025-930XY RT9025-940XY	25W	600mA	3000K 4000K	12° 2310lm/24° 2289lm/36° 2289lm 12° 2593lm/24° 2562lm/36° 2541lm	>90	≥0.95
RT9030-930XY RT9030-940XY	30W	720mA	3000K 4000K	12° 2760lm/24° 2803lm/36° 2782lm 12° 2960lm/24° 2970lm/36° 2930lm	>90	≥0.95
RT9035-930XY RT9035-940XY	35W	850mA	3000K 4000K	12° 2887lm/24° 3118lm/36° 3171lm 12° 3213lm/24° 3423lm/36° 3496lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



Advantages 产品优势

- High Ra > 90, high efficacy, high luminosity, SDCM < 3, make surroundings of high-quality illumination
 - Glare-free design, perfect light spot with precise cast, make surroundings of comfortable illumination
 - Non-flicker design for superior surrounding lighting requirement
 - Integral light housing for better heat dissipation, built-in driver for low-temperature operation
 - Refined components and design, guarantee a long life span of over 40000 hours
- Ra大于90高显指、高光效、高照度，低色容差SDCM小于3，营造高质量光环境
 - 防眩光设计，光斑完美，角度精准，营造舒适光环境
 - 无频闪电源方案，满足更高端环境灯光需要
 - 一体化型材模具散热更好，电源内置也能保证低温工作
 - 选用材料及方案精益求精，保证灯具寿命更长，寿命大于40,000小时

- CITIZEN COB
- SDCM < 3
- 40W/45W
- Color Black/White
- 15° / 24° / 36° / 60°
- CRI > 90
- 5 YEAR 5 Years Warranty 5年质保
- AC100-240/220-240V 50/60Hz


RT100 Series

Track light RT100 originally researched and developed by KWT, with inspiration from people's double eyelids, 100mm diameter face cover, integral lamp housing of module CNC aluminum, concise and fluent outlook, internationally top rank CITIZEN COB, plus oriented glare-free reflector and exclusive non-flicker driver, power range from 40w to 45w, ideal choice for royal family, high-end club, museum, and internationally known brands, e.g. Louis Vuitton, Prada, GUCCI, etc.


RT100系列为KWT完全自主研发的一款高端的电源内置式射灯，设计灵感来自于人类的双眼皮眼睛，灯体口径尺寸为100mm，整灯采用铝材模具一体成型，外型达到最简洁流畅。采用高品质西铁城光源，独特的防眩光反光杯光学设计，搭配内置恒流驱动电源，可调光，高效率，无频闪，是高端会所、博物馆等国际品牌连锁店的最佳灯具选择。



Dimensions 产品尺寸 (Unit: mm)

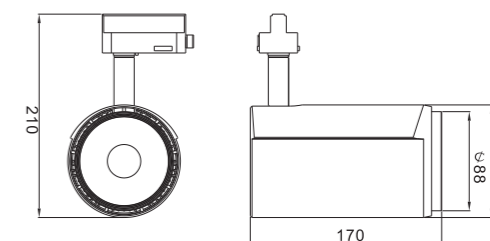

Photometric Diagram 光度分布图

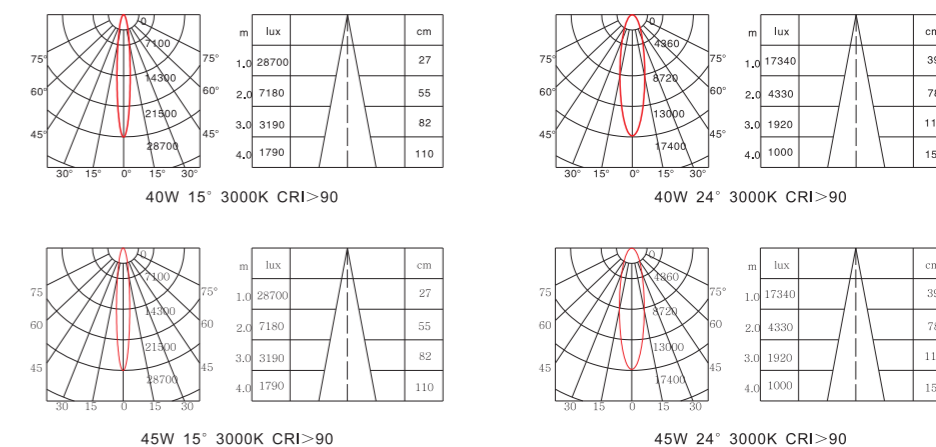

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT10040-930XY RT10040-940XY	40W	960mA	3000K 4000K	15° 3937lm/24° 3906lm/36° 3811lm 15° 4305lm/24° 4336lm/36° 4179lm	>90	≥0.95
RT10045-930XY RT10045-940XY	45W	1100mA	3000K 4000K	15° 4284lm/24° 4210lm/36° 4105lm 15° 4200lm/24° 4337lm/36° 4557lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

TRACK LIGHT SERIES

轨道灯系列

Model.型号

RT85AD
RT85BD
RT85AL
RT85BL

Power.功率

15 / 20 / 25 / 30 / 35W
15 / 20 / 25 / 30 / 35W
15 / 20 / 25 / 30 / 35W
15 / 20 / 25 / 30 / 35W



Advantages 产品优势

- High Ra > 90, high efficacy, high luminosity ,SDCM < 3, make surroundings of high-quality illumination
 - Glare-free design, perfect light spot with precise cast, make surroundings of comfortable illumination
 - Refined components and design, guarantee a long life span of over 40000 hours
 - Perfect combination of spherical radiator and cambered driver, smooth and concise appearance, fit for different occasions
- Ra大于90高显指、高能效、高亮度，低色容差SDCM小于3，营造高质量光环境
 - 防眩光设计，光斑完美，角度精准，营造舒适光环境
 - 选用材料及方案精益求精，保证灯具寿命更长，寿命大于40,000小时
 - 圆形散热体与弧形电源盒完美结合，外观简洁流畅，适合多种场所要求



CITIZEN COB



SDCM <3



15W/20W/25W/30W/35W



Color Black/White



12° /24° /36° /60°



CRI >90



AC100-240/220-240V 50/60Hz



5 YEAR 5 Years Warranty 5年质保


RT85AD Series

Track light RT85AD originally researched and developed by KWT,die-casting radiator of high-rank aluminum.Driver shell of CNC refined aluminum,top international COB CITIZEN chip,combined with exclusive lens and reflector optical system,plus superior KWT driver,both the ideal choice for high-end atmosphere and for designers'preference for lens.


RT85AD系列为金瓦特自主研发的一款灯具,散热器采用高纯度铝材一体化压铸成型,铝质电源盒采用高级PC材质,高品质西铁城光源,结合金瓦特独特的透镜加反光杯光学设计,搭配金瓦特高品质恒流驱动电源,可调光、高效率、无频闪，是一款高端场所灯具的理想选择。



Dimensions 产品尺寸 (Unit: mm)

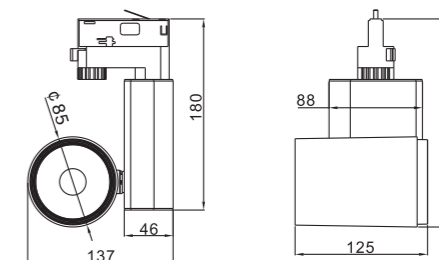

Photometric Diagram 光度分布图

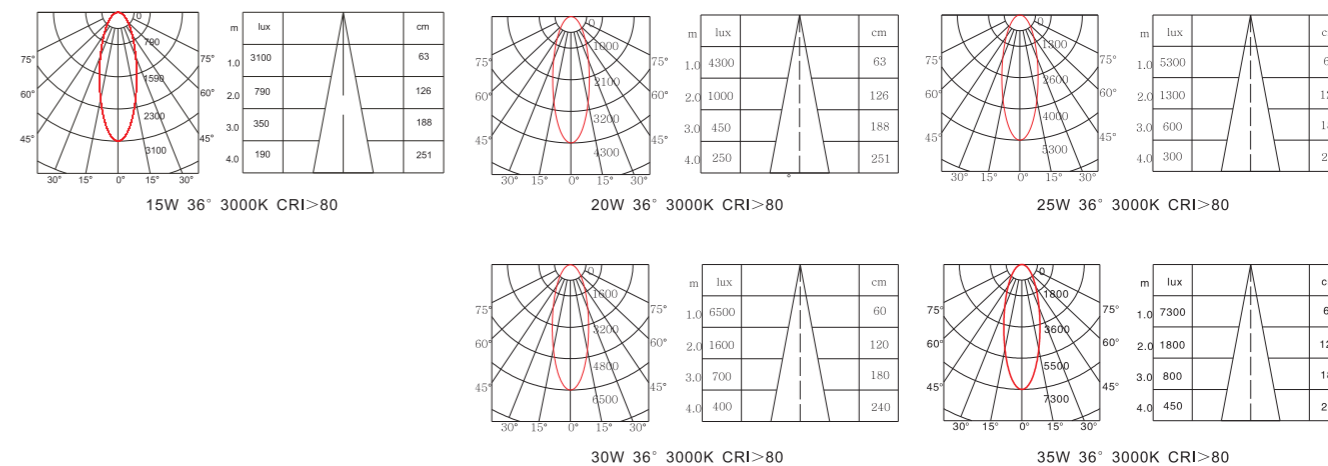

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT8515-AC930DXY	15W	360mA	3000K	12° 1333lm/24° 1323lm/36° 1365lm/60° 1123lm	>90	≥0.95
RT8515-AC940DXY			4000K	12° 1396lm/24° 1386lm/36° 1407lm/60° 1239lm		
RT8520-AC930DXY	20W	480mA	3000K	12° 1858lm/24° 1837lm/36° 1575lm/60° 1575lm	>90	≥0.95
RT8520-AC940DXY			4000K	12° 2016lm/24° 2016lm/36° 2047lm/60° 1795lm		
RT8525-AC930DXY	25W	600mA	3000K	12° 2310lm/24° 2289lm/36° 2289lm/60° 1963lm	>90	≥0.95
RT8525-AC940DXY			4000K	12° 2593lm/24° 2562lm/36° 2541lm/60° 2163lm		
RT8530-AC930DXY	30W	720mA	3000K	12° 2394lm/24° 2803lm/36° 2782lm/60° 2341lm	>90	≥0.95
RT8530-AC940DXY			4000K	12° 3055lm/24° 3055lm/36° 3055lm/60° 2425lm		
RT8535-AC930DXY	35W	850mA	3000K	12° 2887lm/24° 3118lm/36° 3171lm/60° 2646lm	>90	≥0.95
RT8535-AC940DXY			4000K	12° 3213lm/24° 3423lm/36° 3496lm/60° 2814lm		

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) Y=B(Black) Y=W(White)

Advantages 产品优势

- High Ra > 90, high efficacy, high luminosity, SDCM < 3, make surroundings of high-quality illumination
- Glare-free design, perfect light spot with precise cast, make surroundings of comfortable illumination
- Refined components and design, guarantee a long life span of over 40000 hours
- Driver box closely attached to track rail for a neat and elegant visual feeling, to meet peculiar illumination requirements
- Ra大于90高显指、高光效、高照度、低色容差SDCM小于3, 营造高质量光环境
- 防眩光设计, 光斑完美, 角度精准, 营造舒适光环境
- 选用材料及方案精益求精, 保证灯具寿命更长, 寿命大于40,000小时
- 电源盒与轨道杆紧密贴合的设计使安装环境更加整洁美观, 能满足大众对环境的挑剔要求



CITIZEN COB



SDCM < 3



15W/20W/25W/30W/35W



Color Black/White



12° / 24° / 36° / 60°



CRI > 90



AC100-240/220-240V 50/60Hz



5 YEARS 5 Years Warranty 5年质保


RT85BD Series

Track light RT85BD originally researched and developed by KWT, die-casting radiator of high-rank aluminum. Driver shell of CNC refined aluminum, top international COB CITIZEN chip, combined with exclusive lens and reflector optical system, plus superior KWT driver, both the ideal choice for high-end atmosphere and for designers' preference for lens.


RT85BD系列为金瓦特自主研发的一款灯具,散热器采用高纯度铝材一体化压铸成型,铝质电源盒采用高级PC材质,高品质西铁城光源,结合金瓦特独特的透镜加反光杯光学设计,搭配金瓦特高品质恒流驱动电源,可调光、高效率、无频闪,是一款高端场所灯具的理想选择。



Dimensions 产品尺寸 (Unit: mm)

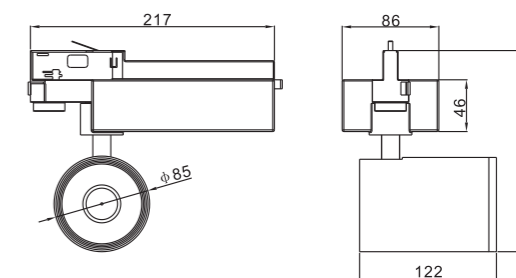

Photometric Diagram 光度分布图

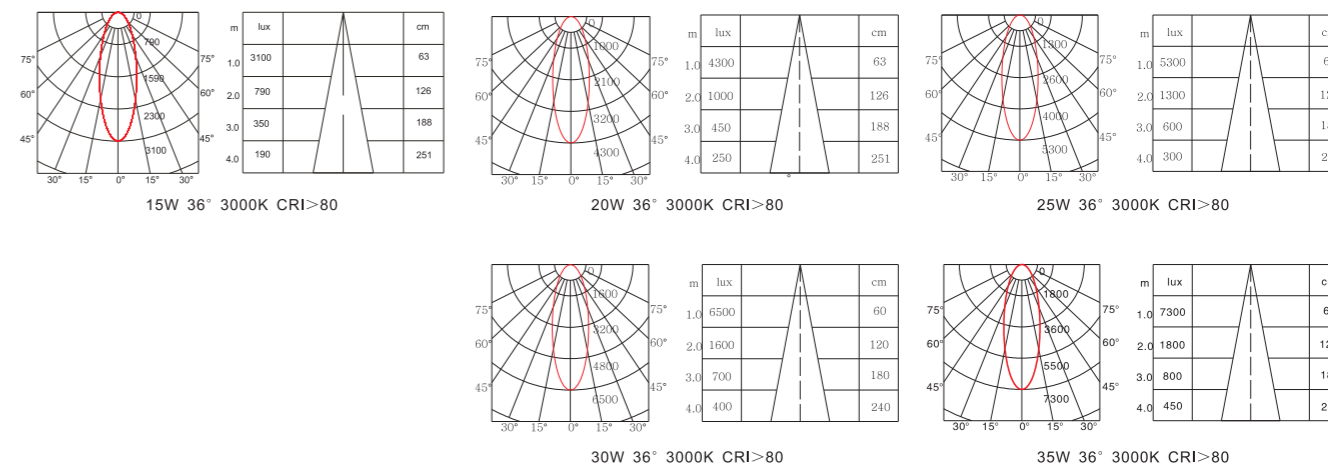

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT8515-BC930DXY RT8515-BC940DXY	15W	360mA	3000K 4000K	12° 1333lm/24° 1323lm/36° 1365lm/60° 1123lm 12° 1396lm/24° 1386lm/36° 1407lm/60° 1239lm	>90	≥0.95
RT8520-BC930DXY RT8520-BC940DXY	20W	480mA	3000K 4000K	12° 1858lm/24° 1837lm/36° 1575lm/60° 1575lm 12° 2016lm/24° 2016lm/36° 2047lm/60° 1795lm	>90	≥0.95
RT8525-BC930DXY RT8525-BC940DXY	25W	600mA	3000K 4000K	12° 2310lm/24° 2289lm/36° 2289lm/60° 1963lm 12° 2593lm/24° 2562lm/36° 2541lm/60° 2163lm	>90	≥0.95
RT8530-BC930DXY RT8530-BC940DXY	30W	720mA	3000K 4000K	12° 2394lm/24° 2803lm/36° 2782lm/60° 2341lm 12° 3055lm/24° 3055lm/36° 3055lm/60° 2425lm	>90	≥0.95
RT8535-BC930DXY RT8535-BC940DXY	35W	850mA	3000K 4000K	12° 2887lm/24° 3118lm/36° 3171lm/60° 2646lm 12° 3213lm/24° 3423lm/36° 3496lm/60° 2814lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) Y=B(Black) Y=W(White)

Advantages 产品优势

- High Ra > 90, high efficacy, high luminosity ,SDCM < 3, make surroundings of high-quality illumination
 - Glare-free design, perfect light spot with precise cast, make surroundings of comfortable illumination
 - Refined components and design, guarantee a long life span of over 40000 hours
 - Perfect combination of spherical radiator and cambered driver, smooth and concise appearance, fit for different occasions
- Ra大于90高显指、高光效、高照度，低色容差SDCM小于3，营造高质量光环境
 - 防眩光设计，光斑完美，角度精准，营造舒适光环境
 - 选用材料及方案精益求精，保证灯具寿命更长，寿命大于40,000小时
 - 圆形散热体与弧形电源盒完美结合，外观简洁流畅，适合多种场所要求



CITIZEN COB



SDCM <3



15W/20W/25W/30W/35W



Color Black/White



12° /24° /36° /60°



CRI >90



AC100-240/220-240V 50/60Hz



5 YEARS 5 Years Warranty 5年质保


RT85AL Series

Track light RT85AL originally researched and developed by KWT, die-casting radiator of high-rank aluminum. Driver shell of CNC refined aluminum, top international COB CITIZEN chip, combined with exclusive lens and reflector optical system, plus superior KWT driver, both the ideal choice for high-end atmosphere and for designers' preference for lens.


RT85AL系列为金瓦特自主研发的一款灯具，散热器采用高纯度铝材一体化压铸成型，铝质电源盒采用高级PC材质，高品质西铁城光源，结合金瓦特独特的透镜光学设计，搭配金瓦特高品质恒流驱动电源，可调光、高效率、无频闪，是一款高端场所灯具的理想选择。



Dimensions 产品尺寸 (Unit:mm)

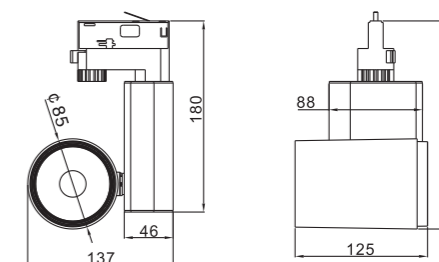

Photometric Diagram 光度分布图

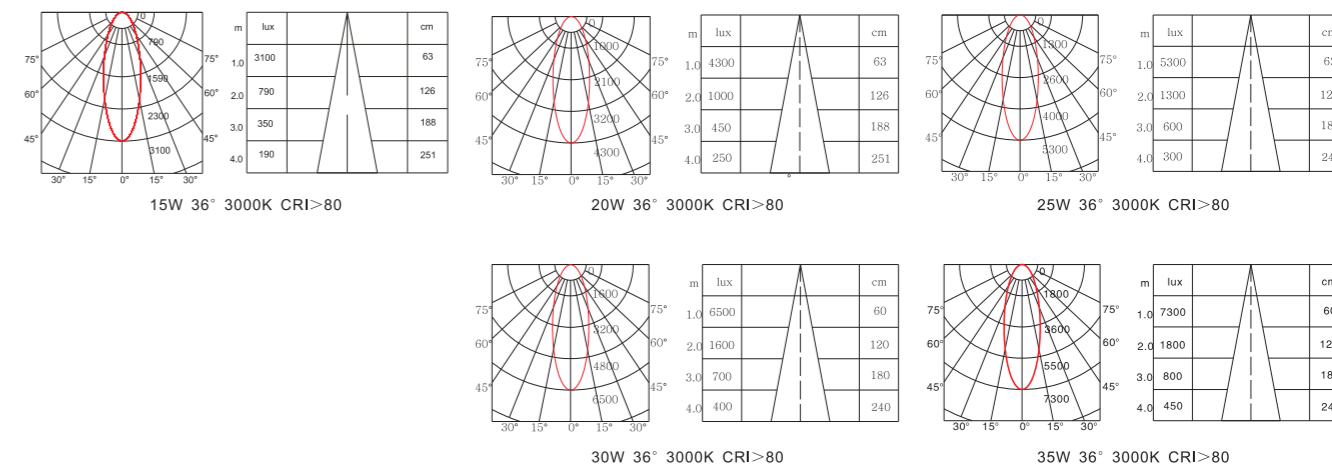

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT8515-AC930LXY RT8515-AC940LXY	15W	360mA	3000K 4000K	12° 1260lm/24° 1207lm/36° 1365lm 12° 1291lm/24° 1270lm/36° 1407lm	>90	≥0.95
RT8520-AC930LXY RT8520-AC940LXY	20W	480mA	3000K 4000K	12° 1785lm/24° 1722lm/36° 1575lm 12° 1932lm/24° 1858lm/36° 2047lm	>90	≥0.95
RT8525-AC930LXY RT8525-AC940LXY	25W	600mA	3000K 4000K	12° 2226lm/24° 2121lm/36° 2289lm 12° 2415lm/24° 2383lm/36° 2541lm	>90	≥0.95
RT8530-AC930LXY RT8530-AC940LXY	30W	720mA	3000K 4000K	12° 2341lm/24° 2593lm/36° 2782lm 12° 3055lm/24° 2866lm/36° 3055lm	>90	≥0.95
RT8535-AC930LXY RT8535-AC940LXY	35W	850mA	3000K 4000K	12° 2835lm/24° 2971lm/36° 3171lm 12° 3181lm/24° 3244lm/36° 3496lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) Y=B(Black) Y=W(White)

Advantages 产品优势

- High Ra > 90, high efficacy, high luminosity ,SDCM < 3, make surroundings of high-quality illumination
 - Glare-free design, perfect light spot with precise cast, make surroundings of comfortable illumination
 - Refined components and design, guarantee a long life span of over 40000 hours
 - Perfect combination of spherical radiator and cambered driver, smooth and concise appearance, fit for different occasions
- Ra大于90高显指、高光效、高照度，低色容差SDCM小于3，营造高质量光环境
 - 防眩光设计，光斑完美，角度精准，营造舒适光环境
 - 选用材料及方案精益求精，保证灯具寿命更长，寿命大于40,000小时
 - 圆形散热体与弧形电源盒完美结合，外观简洁流畅，适合多种场所要求



CITIZEN COB

SDCM <3



15W/20W/25W/30W/35W

Color Black/White



12° /24° /36° /60°

CRI >90



AC100-240/220-240V 50/60Hz

5 YEAR
5 Years Warranty
5年质保


RT85BL Series

Track light RT85BL originally researched and developed by KWT,die-casting radiator of high-rank aluminum.Driver shell of CNC refined aluminum,top international COB CITIZEN chip,combined with exclusive lens optical system,plus superior KWT driver,both the ideal choice for high-end atmosphere and for designers'preference for lens.


RT85BL系列为金瓦特自主研发的一款灯具,散热器采用高纯度铝材一体化压铸成型,铝质电源盒采用高级PC材质,高品质西铁城光源,结合金瓦特独特的透镜光学设计,搭配金瓦特高品质恒流驱动电源,可调光、高效率、无频闪，是一款高端场所灯具的理想选择。



Dimensions 产品尺寸 (Unit: mm)

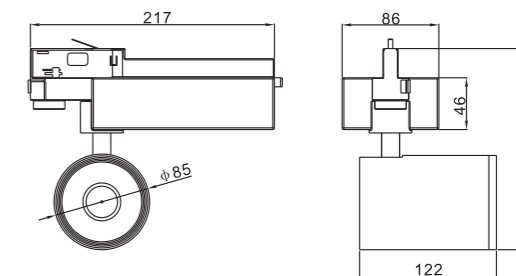

Photometric Diagram 光度分布图

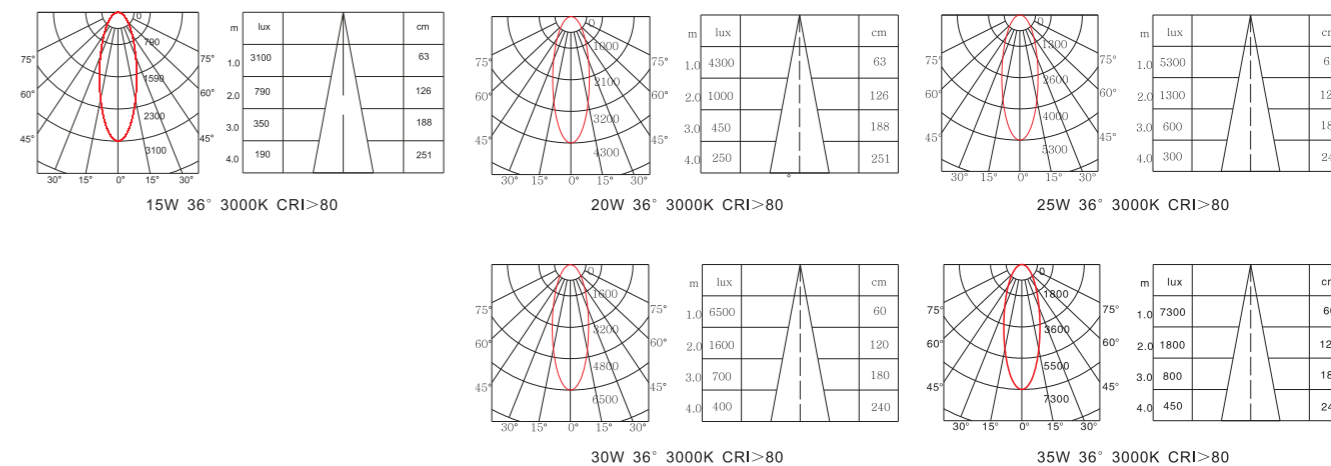

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RT8515-BC930LXY RT8515-BC940LXY	15W	360mA	3000K 4000K	12° 1260lm/24° 1207lm/36° 1365lm 12° 1291lm/24° 1270lm/36° 1407lm	>90	≥0.95
RT8520-BC930LXY RT8520-BC940LXY	20W	480mA	3000K 4000K	12° 1785lm/24° 1722lm/36° 1575lm 12° 1932lm/24° 1858lm/36° 2047lm	>90	≥0.95
RT8525-BC930LXY RT8525-BC940LXY	25W	600mA	3000K 4000K	12° 2226lm/24° 2121lm/36° 2289lm 12° 2415lm/24° 2383lm/36° 2541lm	>90	≥0.95
RT8530-BC930LXY RT8530-BC940LXY	30W	720mA	3000K 4000K	12° 2341lm/24° 2593lm/36° 2782lm 12° 3055lm/24° 2866lm/36° 3055lm	>90	≥0.95
RT8535-BC930LXY RT8535-BC940LXY	35W	850mA	3000K 4000K	12° 2835lm/24° 2971lm/36° 3171lm 12° 3181lm/24° 3244lm/36° 3496lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

TRACK LIGHT SERIES

轨道灯系列

Model.型号

LT100-A
LT100-B

Power.功率

10 / 15W
10 / 15W



Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
 - No glare lens, can match the white, black, gold three reflective cup
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)
 - Rotatable horizontal 355° and vertical 90°, to meet the needs of different exposure
- 高亮度，低光衰，低色容差SDCM小于3
 - 无眩光透镜，可搭配白色，黑色，金色三种反光杯
 - 精致的部件和设计，保证长达40,000的使用寿命
 - 内置电源可控可调光（200-240V输入）
 - 可旋转水平355°和垂直90°，以满足不同的需求



CITIZEN COB



SDCM <3



10W/15W



Color Black/White



24°



CRI >90



AC100-240/220-240V 50/60Hz



5 Years Warranty
5年质保


LT100-A Series

LT100-A Series using advanced aluminum radiator, international top COB CITIZEN chip, No glare lens, can match the white, black, gold three reflective cup, interior driver, can rotatable horizontal 355° and vertical 90°, to meet the needs of different exposure. glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination. guarantee a long life span of over 40,000 hours.


LT100-A系列采用高导热的铝散热器，高品质西铁城光源，防眩光透镜，可匹配白色、黑色、金色三种反光杯，内置恒流驱动电源，可旋转水平355°和垂直90°，以满足不同的需求。防眩光的设计，完美的光斑和准确的光束角度，营造舒适的光环境。整灯超过40,000小时的使用寿命。



Dimensions 产品尺寸 (Unit: mm)

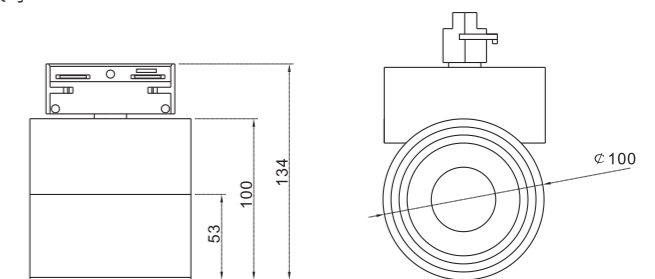

Photometric Diagram 光度分布图

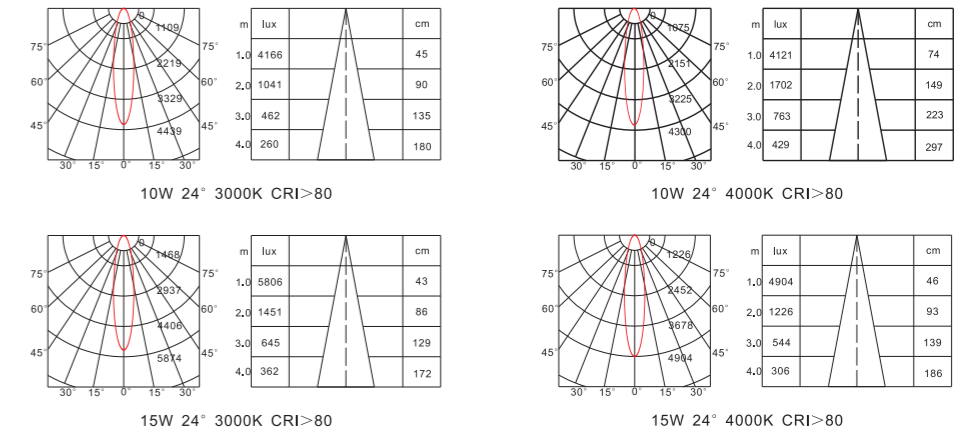

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
LT10010A-930XY	10W	240mA	3000K	916lm	>90	≥0.9
LT10010A-940XY	10W	240mA	4000K	922lm	>90	≥0.9
LT10015A-930XY	15W	360mA	3000K	1252lm	>90	≥0.9
LT10015A-940XY	15W	360mA	4000K	1221lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline
- No glare lens, can match the white, black, gold three reflective cup
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)
- Rotatable horizontal 355° and vertical 90°, to meet the needs of different exposure

- 高亮度, 低光衰, 低色容差SDCM小于3
- 无眩光透镜, 可搭配白色, 黑色, 金色三种反光杯
- 精致的部件和设计, 保证长达40,000的使用寿命
- 内置电源三端双向可控可调光 (200-240V输入)
- 可旋转水平355°和垂直90°, 以满足不同的需求



CITIZEN COB

SDCM <3



10W/15W

Color Black/White



24°

CRI >90



AC100-240/220-240V 50/60Hz

5 YEAR 5 Years Warranty 5年质保


LT100-B Series

LT100-B Series using advanced aluminum radiator, international top COB CITIZEN chip, No glare lens, can match the white, black, gold three reflective cup, interior driver, can rotatable horizontal 355° and vertical 90°, to meet the needs of different exposure. glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination. guarantee a long life span of over 40,000 hours.


LT100-B系列采用高导热的铝散热器, 高品质西铁城光源, 防眩光透镜, 可匹配白色、黑色、金色三种反光杯, 内置恒流驱动电源, 可旋转水平355°和垂直90°, 以满足不同的需求。防眩光的设计, 完美的光斑和准确的光束角度, 营造舒适的光环境。整灯超过40,000小时的使用寿命。



Dimensions 产品尺寸 (Unit: mm)

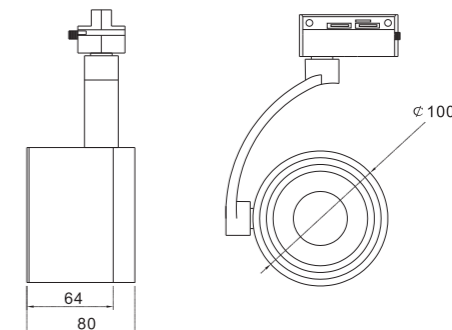

Photometric Diagram 光度分布图

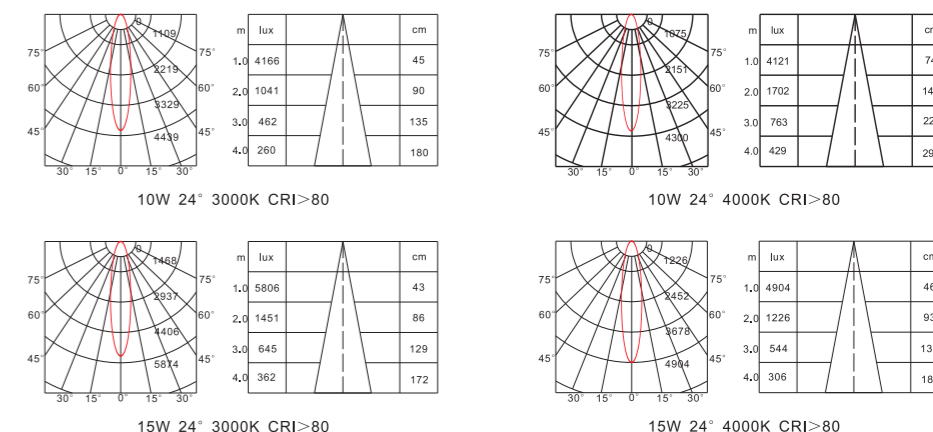

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
LT10010B-930XY	10W	240mA	3000K	916lm	>90	≥0.9
LT10010B-940XY	10W	240mA	4000K	922lm	>90	≥0.9
LT10015B-930XY	15W	360mA	3000K	1252lm	>90	≥0.9
LT10015B-940XY	15W	360mA	3000K	1221lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

CEILING RECESSED SPOT LIGHTSERIES

嵌入式射灯系列

Model.型号

RC80
RC95
RC69
RC90
RC100
RC105

Power.功率

15 / 20 / 28W
30 / 35W
8 / 12 / 15W
20 / 25 / 30 / 35W
40 / 45W
30 / 35 / 45 / 56W



Advantages 产品优势

- High quality citizen cob led, SDCM<3
- Advanced design of ultra-thin hybrid optical lens, with first-rate lighting control effect
- A variety of spot shapes due to optical accessories, to adapt to different lighting demand
- Anti-glare design with different anti-glare accessories
- Modularity structure, easier to assemble, install and disassemble
- Rotatable horizontal 355° and vertical 90°
- Long life, >50,000 hours, 5 years warranty

- 高品质西铁城COB光源，低色容差SDCM <3
- 先进的超薄混合光学透镜设计，一流的照明控制效果
- 不同的光学配件可呈现出不同的光斑，以满足不同的照明需求
- 配有不同的防眩光配件的防眩设计
- 模块化结构，更易于组装，安装和拆卸
- 可水平旋转355° 垂直旋转90°
- 超长使用寿命，>50000小时，5年质保



CITIZEN COB



SDCM <3



15W/20W/28W



Color Black/White



12° /22° /36°



CRI >90



φ90mm



5 Years Warranty
5年质保


RC80 Series

RC80 series Ceiling Recessed spotlights use high purity aluminium radiators, perfect heat dissipation treatment, long using life; high quality chips, high RA, high efficiency; international certification standards; can be replaced by optical dimmers to meet different lighting effects and light shape requirements; a variety of beam angles can be selected; lamp body multiangle adjustment, horizontal 355 degrees, vertical 90 degrees; can be equipped with dimmer driver, Support DALI dimming system to achieve energysaving customized lighting;the whole light can be disassembled and replaced by bare hands, easy to install, to meet the lighting needs in different places such as clothing stores, furniture stores, museums and so on.


RC80系列轨道射灯使用高纯度铝散热器，完美的散热处理，超长使用寿命；优质芯片，高显指，高光效；产品符合国际认证标准；可通过更换光学变光片，来满足不同照明效果和光形需求；多种光束角可选；灯体多角度调节，水平355°，垂直90°；可配调光驱动器，支持DALI调光系统，实现节能定制照明；整灯可徒手拆卸更换，安装方便，能满足在服装店、家具店、博物馆等不同场所的照明需求。



Dimensions 产品尺寸 (Unit: mm)

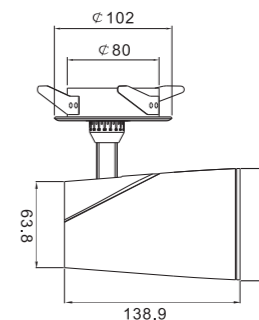

Photometric Diagram 光度分布图

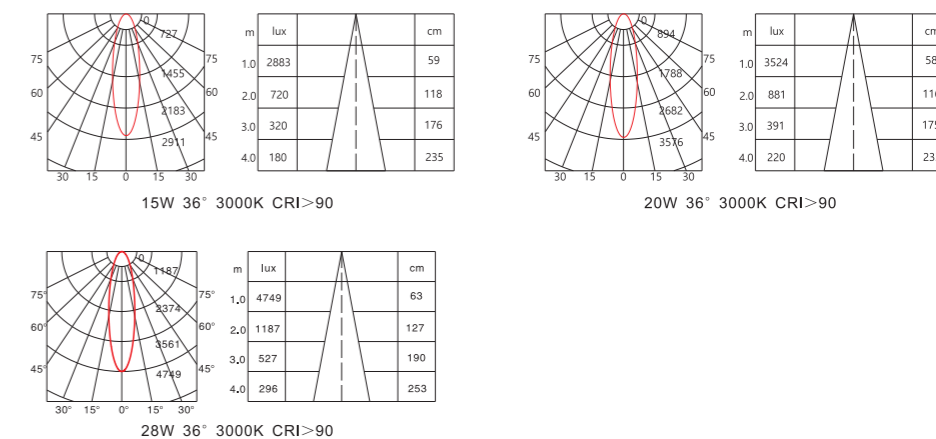

Order Information 产品信息

Mode 型号	Power 功率	Input voltage 输入电压	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC8015-930XY	15W	AC220-240V 50/60Hz	360mA	3000K	12° 1265lm/22° 1235lm/36° 1164lm	>90	≥0.95
RC8020-930XY	20W	AC220-240V 50/60Hz	480mA	3000K	12° 1604lm/22° 1510lm/36° 1460lm	>90	≥0.95
RC8028-930XY	28W	AC220-240V 50/60Hz	680mA	3000K	12° 2135lm/22° 2096lm/36° 2071lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- High quality citizen cob led, SDCM<3
- Advanced design of ultra-thin hybrid optical lens, with first-rate lighting control effect
- A variety of spot shapes due to optical accessories, to adapt to different lighting demand
- Anti-glare design with different anti-glare accessories
- Modularity structure, easier to assemble, install and disassemble
- Rotatable horizontal 355° and vertical 90°
- Long life, >50,000 hours, 5 years warranty


- 高品质西铁城COB光源，低色容差SDCM <3
- 先进的超薄混合光学透镜设计，一流的照明控制效果
- 不同的光学配件可呈现出不同的光斑，以满足不同的照明需求
- 配有不同的防眩光配件的防眩设计
- 模块化结构，更易于组装，安装和拆卸
- 可水平旋转355° 垂直旋转90°
- 超长使用寿命，>50000小时，5年质保



Dimensions 产品尺寸 (Unit:mm)

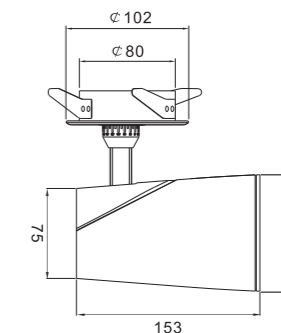

Photometric Diagram 光度分布图

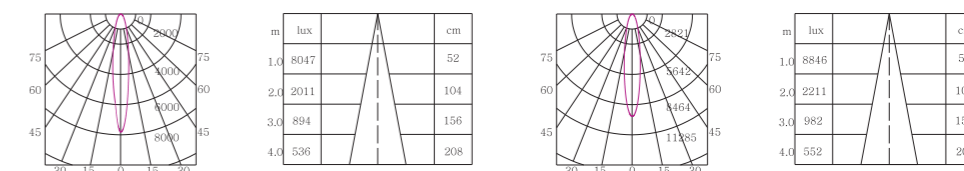

- CITIZEN COB
- SDCM <3
- 30W/35W
- Color Black/White
- 12° /24° /36°
- CRI >90
- φ90mm
- 5 Years Warranty 5年质保

RC95 Series

RC95 series track spotlights use high purity aluminium radiator, perfect heat dissipation treatment, long using life; high quality chips, high RA, high efficiency; international certification standards; products are universal, rich anti-glare hood, to meet different lighting effects requirements; bracket design dial, multi-angle adjustment. It can be equipped with dimming driver to support DALI dimming system to achieve energy-saving customized lighting. The whole light can be disassembled and replaced by bare hands. It is easy to install and meet the lighting needs in different places such as clothing stores, furniture stores and museums and so on.

RC95系列轨道射灯使用高纯度铝散热器，完美的散热处理，超长使用寿命；优质芯片，高显指，高光效；产品符合国际认证标准；产品通用化，丰富的防眩前罩，满足不同照明效果需求；支架上设计有刻度盘，可多角度调节，水平355°，垂直90°；可配调光驱动器，支持DALI调光系统，实现节能定制照明；整灯可徒手拆卸更换，安装方便，能满足在服装店、家具店、博物馆等不同场所的照明需求。

Order Information 产品信息

Mode 型号	Power 功率	Input voltage 输入电压	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC9530-930XY	30W	AC220-240V 50/60Hz	720mA	3000K	12° 2840lm/24° 2728lm	>90	≥0.95
RC9535-930XY	35W	AC220-240V 50/60Hz	850mA	3000K	12° 3125lm/24° 3001lm	>90	≥0.95


Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势


- High Ra > 90, Low SDCM < 3
 - High efficiency, high illuminance
 - Glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Rotatable horizontal 355° and vertical 90°
 - Exterior driver triac dimmable (200-240v input) and 0-10v dimmable (100-240v input)
- 高显指Ra>90, 低色容差SDCM <3
 - 高光效, 高亮度
 - 无眩光设计, 完美的光斑和准确的光束角度, 使照明环境更加舒适
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 可水平旋转355° 和垂直旋转90°
 - 外置电源可配可控硅调光(220-240V输入)和0-10V调光(100-240V输入)



Dimensions 产品尺寸 (Unit: mm)

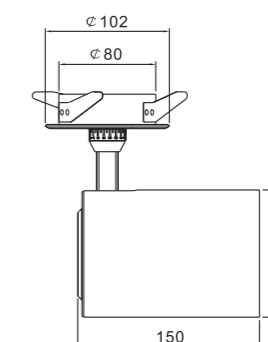

Photometric Diagram 光度分布图

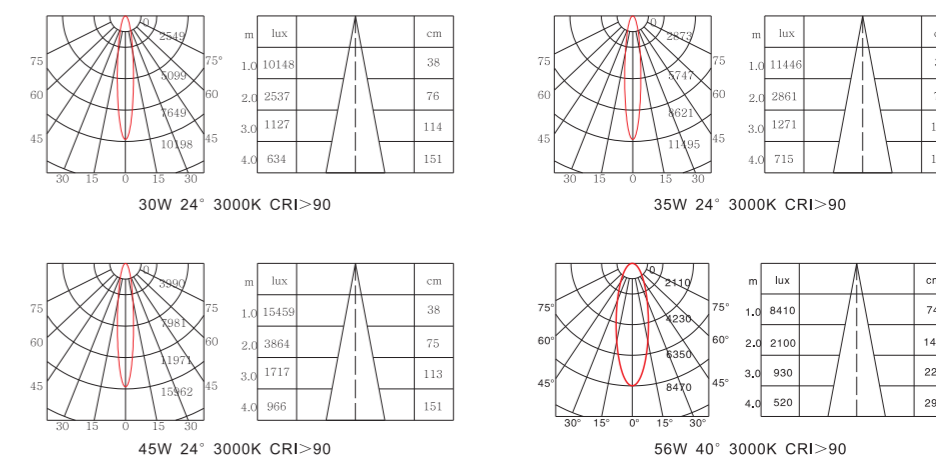

CITIZEN COB



SDCM <3



30W/35W/45W/56W



Color Black/White



12°/24°/40°/60°



CRI >90



φ90mm



5 YEAR 5 Years Warranty 5年质保

RC105 Series

RC105 Series originally researched and developed by KWT, high-rank aluminum integrated heat sink. International top COB CITIZEN chip, High grade translucent panels, combined with KWT exclusive optical system of glare-free lens, standard driver originally researched and developed by KWT, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.

RC105系列是由金瓦特自主研发的, 欧洲经典款使用6063铝材集成散热器, 高品质西铁城光源, PC反光镜, 镜面抛光阳极氧化, 反射率>95%, 高档透明面板, 透光率>93%, 搭配KWT高品质恒流驱动电源, 可调光, 高效率, 无频闪, 整灯寿命超过40,000小时以上。

Order Information 产品信息

Mode 型号	Power 功率	Input voltage 输入电压	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC10530-930XY RC10530-940XY	30W	AC220-240V 50/60Hz	720mA	3000K 4000K	12° 2593lm/24° 2552lm/40° 2541lm 12° 2838lm/24° 2820lm/40° 2800lm	>90	≥0.95
RC10535-930XY RC10535-940XY	35W	AC220-240V 50/60Hz	850mA	3000K 4000K	12° 2826lm/24° 2876lm/40° 2812lm 12° 3210lm/24° 3205lm/40° 3123lm	>90	≥0.95
RC10545-930XY RC10545-940XY	45W	AC220-240V 50/60Hz	1080mA	3000K 4000K	12° 3932lm/24° 3872lm/40° 3800lm 12° 4260lm/24° 4265lm/40° 4123lm	>90	≥0.95
RC10556-930XY RC10556-940XY	56W	AC220-240V 50/60Hz	1350mA	3000K 4000K	12° 5301lm/24° 5221lm/40° 5065lm 12° 5725lm/24° 5638lm/40° 5470lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- High Ra > 90, Low SDCM < 3
- High efficiency, high illuminance
- Glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination
- Refined components and design, guarantee a long life span of over 40,000 hours
- Rotatable horizontal 355° and vertical 90°


- 高显指Ra> 90, 低色容差SDCM <3
- 高光效, 高亮度
- 无眩光设计, 完美的光斑和准确的光束角度, 使照明环境更加舒适
- 精心组装和设计, 保证长达40000小时的使用寿命
- 可水平旋转355° 和垂直旋转90°



Dimensions 产品尺寸 (Unit: mm)

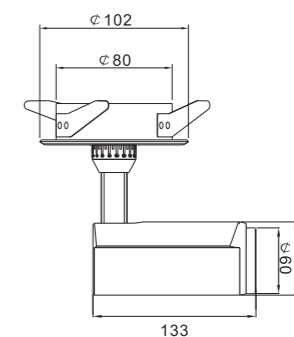

Photometric Diagram 光度分布图

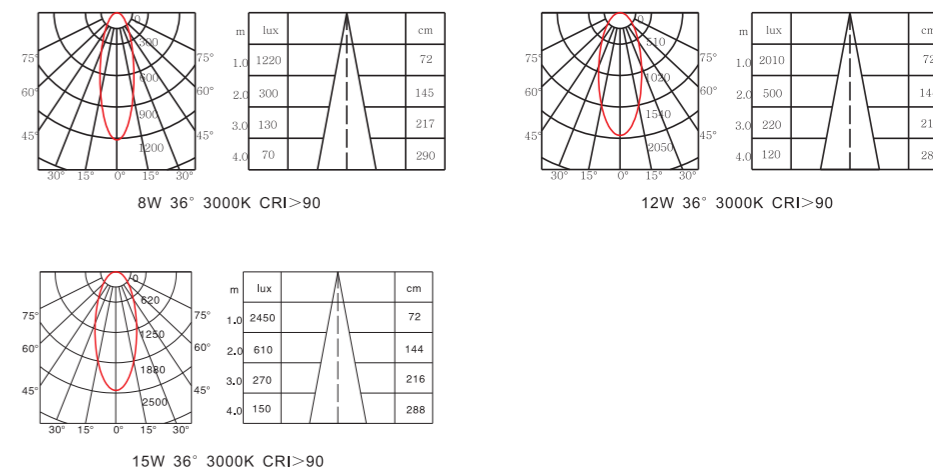

- CITIZEN COB
- SDCM <3
- 8W / 12W / 15W
- Color Black/White
- 15° / 24° / 36° / 60°
- CRI >90
- φ 90mm
- 5 Years Warranty
5年质保

RC69 Series

RC69 Series originally researched and developed by KWT, high-end spotlight with interior driver, design inspiration from people's double-eyelid eyes, 69mm diameter face cover, integrated molded lamp housing of CNC aluminum, international top COB CITIZEN chip, plus oriented glare-free reflector and exclusive non-flicker driver, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.

RC69系列为KWT完全自主研发的一款高端的电源内置式射灯, 设计灵感来自于人类的眼皮眼睛, 灯体口径尺寸为69mm, 整灯采用铝材模具一体成型, 外型达到最简洁流畅。采用高品质西铁城光源, 独特的防眩光反光杯光学设计, 搭配内置恒流驱动电源, 可调光, 高效率, 无频闪, 是高端会所、博物馆等国际品牌连锁店的最佳灯具选择。

Order Information 产品信息

Mode 型号	Power 功率	Input voltage 输入电压	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC6908-930XY RC6908-940XY	8W	AC220-240V 50/60Hz	200mA	3000K 4000K	15° 540lm/24° 530lm/36° 520lm 15° 650lm/24° 640lm/36° 620lm	>90	≥0.9
RC6912-930XY RC6912-940XY	12W	AC220-240V 50/60Hz	280mA	3000K 4000K	15° 880lm/24° 900lm/36° 850lm 15° 1010lm/24° 1030lm/36° 980lm	>90	≥0.9
RC6915-930XY RC6915-940XY	15W	AC220-240V 50/60Hz	360mA	3000K 4000K	15° 1020lm/24° 1080lm/36° 1040lm 15° 1230lm/24° 1230lm/36° 1190lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



Advantages 产品优势

- High Ra > 90, Low SDCM < 3
 - High efficiency, high illuminance
 - Glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Rotatable horizontal 355° and vertical 90°
- 高显指Ra> 90, 低色容差SDCM <3
 - 高光效, 高亮度
 - 无眩光设计, 完美的光斑和准确的光束角度, 使照明环境更加舒适
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 可水平旋转355° 和垂直旋转90°

	CITIZEN COB		SDCM <3
	20W / 25W / 30W / 35W		Color Black / White
	15° / 24° / 36° / 60°		CRI >90
	φ90mm		5 YEAR 5 Years Warranty 5年质保


RC90 Series

RC90 Series originally researched and developed by KWT, high-end spotlight with interior driver, design inspiration from people's double-eyelid eyes, 90mm diameter face cover, integrated molded lamp housing of CNC aluminum, international top COB CITIZEN chip, plus oriented glare-free reflector and exclusive non-flicker driver, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.


RC90系列为KWT完全自主研发的一款高端的电源内置式射灯, 设计灵感来自于人类的双眼皮眼睛, 灯体口径尺寸为90mm, 整灯采用铝材模具一体成型, 外型达到最简洁流畅。采用高品质西铁城光源, 独特的防眩光反光杯光学设计, 搭配内置恒流驱动电源, 可调光, 高效率, 无频闪, 是高端会所、博物馆等国际品牌连锁店的最佳灯具选择。



Dimensions 产品尺寸 (Unit: mm)

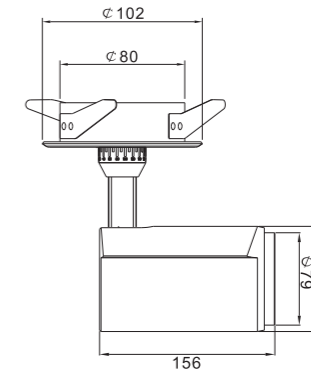

Photometric Diagram 光度分布图

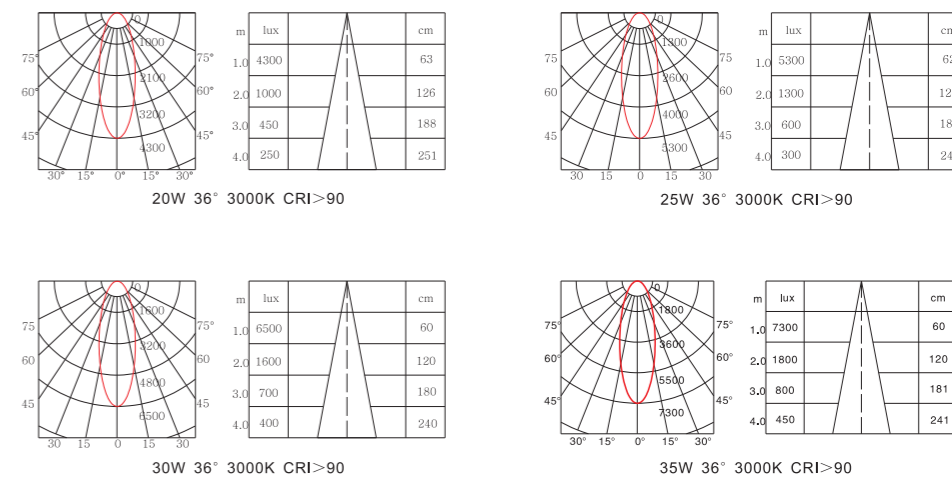

Order Information 产品信息

Mode 型号	Power 功率	Input voltage 输入电压	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC9020-930XY RC9020-940XY	20W	AC100-240/220-240V 50/60Hz	480mA	3000K 4000K	12° 1770lm/24° 1750lm/36° 1800lm 12° 1920lm/24° 1920lm/36° 1950lm	>90	≥0.95
RC9025-930XY RC9025-940XY	25W	AC100-240/220-240V 50/60Hz	600mA	3000K 4000K	12° 2200lm/24° 2180lm/36° 2180lm 12° 2470lm/24° 2440lm/36° 2420lm	>90	≥0.95
RC9030-930XY RC9030-940XY	30W	AC100-240/220-240V 50/60Hz	720mA	3000K 4000K	12° 2280lm/24° 2670lm/36° 2650lm 12° 2910lm/24° 2910lm/36° 2910lm	>90	≥0.95
RC9035-930XY RC9035-940XY	35W	AC100-240/220-240V 50/60Hz	850mA	3000K 4000K	12° 2750lm/24° 2970lm/36° 3020lm 12° 3060lm/24° 3260lm/36° 3330lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)



Advantages 产品优势

- High Ra > 90, Low SDCM < 3
 - High efficiency, high illuminance
 - Glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination
 - Refined components and design, guarantee a long life span of over 40,000 hours
 - Rotatable horizontal 355° and vertical 90°
- 高显指Ra> 90, 低色容差SDCM <3
 - 高光效, 高亮度
 - 无眩光设计, 完美的光斑和准确的光束角度, 使照明环境更加舒适
 - 精心组装和设计, 保证长达40000小时的使用寿命
 - 可水平旋转355° 和垂直旋转90°

- CITIZEN COB
- SDCM <3
- 40W/45W
- Color Black/White
- 15° /24° /36° /60°
- CRI >90
- φ 90mm
- 5 YEARS 5 Years Warranty 5年质保


RC100 Series

RC100 Series originally researched and developed by KWT, high-end spotlight with interior driver, design inspiration from people's double-eyelid eyes, 100mm diameter face cover, integrated molded lamp housing of CNC aluminum, international top COB CITIZEN chip, plus oriented glare-free reflector and exclusive non-flicker driver, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.


RC100系列为KWT完全自主研发的一款高端的电源内置式射灯, 设计灵感来自于人类的双眼皮眼睛, 灯体口径尺寸为100mm, 整灯采用铝材模具一体成型, 外型达到最简洁流畅。采用高品质西铁城光源, 独特的防眩光反光杯光学设计, 搭配内置恒流驱动电源, 可调光, 高效率, 无频闪, 是高端会所、博物馆等国际品牌连锁店的最佳灯具选择。



Dimensions 产品尺寸 (Unit: mm)

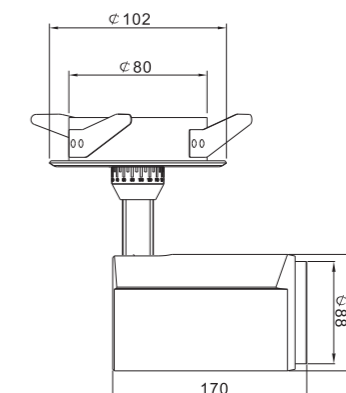

Photometric Diagram 光度分布图

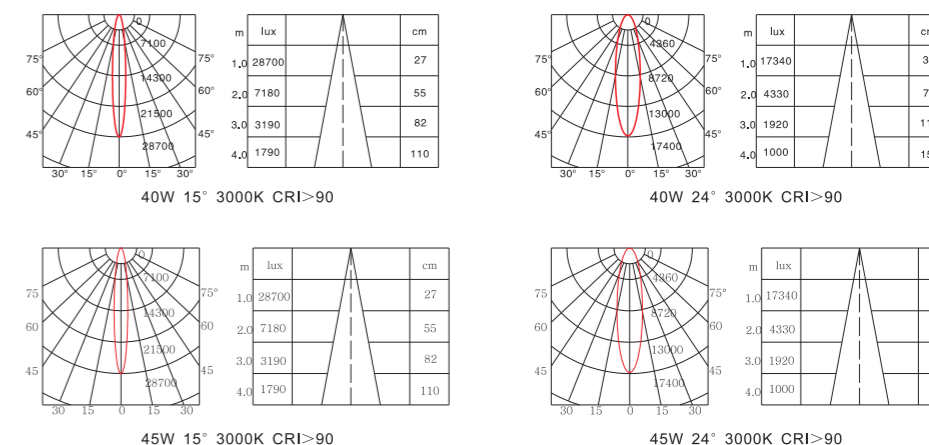

Order Information 产品信息

Mode 型号	Power 功率	Input voltage 输入电压	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RC10040-930XY RC10040-940XY	40W	AC100-240/220-240V 50/60Hz	960mA	3000K 4000K	15° 3750lm/24° 3720lm/36° 3630lm 15° 4100lm/24° 4130lm/36° 3980lm	>90	≥0.95
RC10045-930XY RC10045-940XY	45W	AC100-240/220-240V 50/60Hz	1080mA	3000K 4000K	15° 4080lm/24° 4010lm/36° 3910lm 15° 4000lm/24° 4130lm/36° 4340lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

SURFACE-MOUNTED SPOT LIGHT SERIES

明装射灯系列

Model.型号

LM100
RM70
RM95

Power.功率

10 / 15W
10 / 15W
30 / 35W



Advantages 产品优势

- High brightness, Low SDCM < 3, low light decline,
- No glare lens, can match the white, black, gold three reflective cup
- Refined components and design, guarantee a long life span of over 40,000 hours
- Exterior driver triac dimmable (200-240v input) and 1-10v Dimmable (100-240v input)
- Rotatable horizontal 355° and vertical 90°, to meet the needs of different exposure

- 高亮度，低色容差SDCM小于3，低光衰
- 无眩光透镜，可搭配白色，黑色，金色三种反光杯
- 精致的部件和设计，保证长达40,000的使用寿命
- 内置电源可控可调光（200-240V输入）
- 可旋转水平355°和垂直90°，以满足不同的需求



CITIZEN COB



SDCM < 3



10W / 15W



Color Black / White



24°



CRI > 90



AC100-240/220-240V 50/60Hz




5 Years Warranty
5年质保


LM100 Series

LM100 Series using advanced aluminum radiator, international top COB CITIZEN chip, No glare lens, can match the white, black, gold three reflective cup, interior drive, can rotatable horizontal 355° and vertical 90°, to meet the needs of different exposure. glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination. guarantee a long life span of over 40,000 hours.


LM100系列采用高导热的铝散热器，高品质西铁城光源，防眩光透镜，可匹配白色、黑色、金色三种反光杯，内置恒流驱动电源，可旋转水平355°和垂直90°，以满足不同的需求。防眩光的设计，完美的光斑和准确的光束角度，营造舒适的光环境。整灯超过40,000小时的使用寿命。

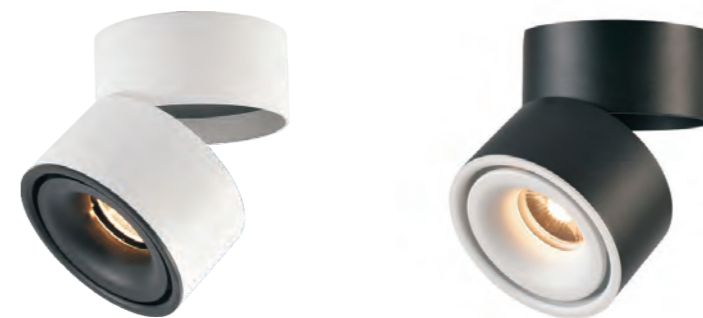

Dimensions 产品尺寸 (Unit: mm)

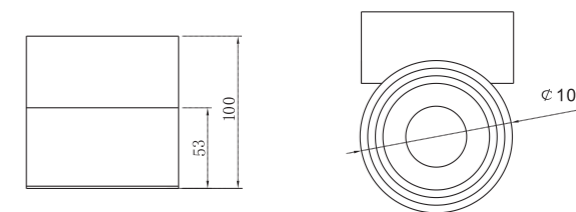

Photometric Diagram 光度分布图

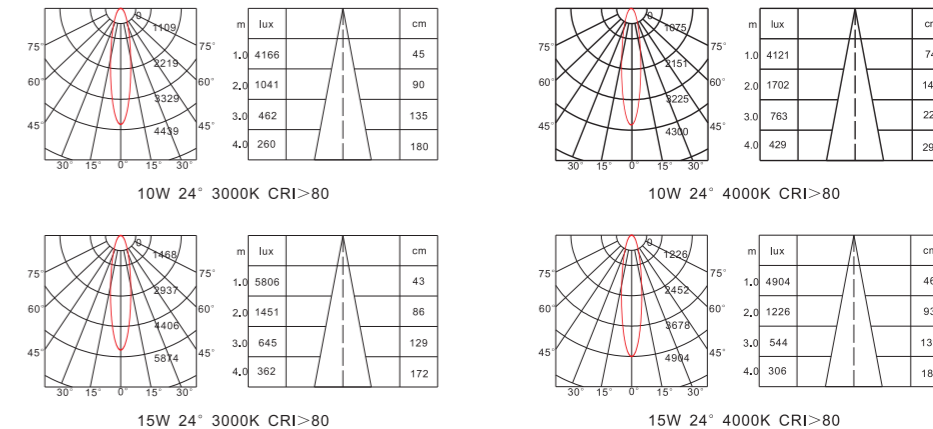

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
LM10010-930XY	10W	240mA	3000K	916lm	>90	≥0.9
LM10010-940XY	10W	240mA	4000K	922lm	>90	≥0.9
LM10015-930XY	15W	360mA	3000K	1252lm	>90	≥0.9
LM10015-940XY	15W	360mA	4000K	1221lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High Ra > 90, Low SDCM < 3
- High efficacy, high illuminance, accurate beam angle makes of comfortable illumination atmosphere
- Can be rotated around 0-90°
- Refined components and design, guarantee a long life span of over 40,000 hours
- User-centered installation design, convenient and simple use

- 高显指Ra大于90, 低色容差SDCM小于3
- 高效率, 高照度, 控光精准, 光感舒适
- 0-90°可旋转
- 精致组件和设计, 整灯寿命长达40,000小时
- 以用户为中心的安裝设计, 方便, 易用



CITIZEN COB

SDCM <3



10W/15W

Color Black/White



15° /24° /36° /45°

CRI >90



AC220-240V 50/60Hz

5 YEAR 5 Years Warranty 5年质保


RM70 Series

RM70 use die-casting high-rank aluminum integrated heat sink, international top COB CITIZEN chip, High grade translucent panels, combined with KWT exclusive optical system of glare-free lens, standard driver originally researched and developed by KWT, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.


RM70系列采用压铸铝一体成型散热器, 高品质西铁城光源, 高透光面板, 结合金瓦特独有的防眩透镜, 搭配金瓦特高品质恒流驱动电源。整灯运行稳定, 防眩光, 高效率, 无频闪, 整灯超过40,000小时的使用寿命。



Dimensions 产品尺寸 (Unit: mm)

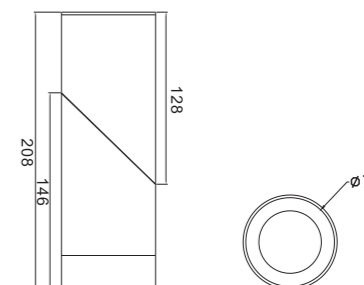

Photometric Diagram 光度分布图

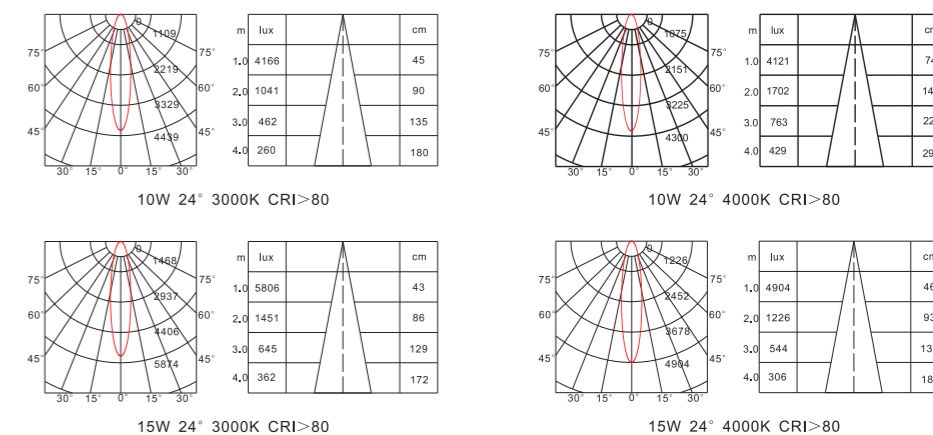

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RM7010-930XY	10W	240mA	3000K	15° 827lm/24° 856lm/45° 834lm	>90	≥0.9
RM7010-940XY	10W	240mA	4000K	15° 901lm/24° 933lm/45° 909lm	>90	≥0.9
RM7015-930XY	15W	360mA	3000K	15° 1241lm/24° 1285lm/45° 1252lm	>90	≥0.9
RM7015-940XY	15W	360mA	4000K	15° 1336lm/24° 1365lm/45° 1340lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- High quality citizen cob led, SDCM<3
- Advanced design of ultra-thin hybrid optical lens, with first-rate lighting control effect
- A variety of spot shapes due to optical accessories, to adapt to different lighting demand
- Anti-glare design with different anti-glare accessories
- Modularity structure, easier to assemble, install and disassemble
- Rotatable horizontal 355° and vertical 90°
- Long life, >50,000 hours, 5 years warranty

- 高品质西铁城COB光源，低色容差SDCM <3
- 先进的超薄混合光学透镜设计，一流的照明控制效果
- 不同的光学配件可呈现出不同的光斑，以满足不同的照明需求
- 配有不同的防眩光配件的防眩设计
- 模块化结构，更易于组装，安装和拆卸
- 可水平旋转355° 垂直旋转90°
- 超长使用寿命，>50000小时，5年质保



CITIZEN COB



<3



30W / 35W



Color Black/White



12° / 24° / 36°



>90



AC220-240V 50/60Hz



5 Years Warranty
5年质保


RM95 Series

RM95 series track spotlights use high purity aluminium radiator, perfect heat dissipation treatment, long using life; high quality chips, high RA, high efficiency; international certification standards; products are universal, rich anti-glare hood, to meet different lighting effects requirements; bracket design dial, multi-angle adjustment. It can be equipped with dimming driver to support DALI dimming system to achieve energy-saving customized lighting. The whole light can be disassembled and replaced by bare hands. It is easy to install and meet the lighting needs in different places such as clothing stores, furniture stores and museums and so on.


RM95系列轨道射灯使用高纯度铝散热器，完美的散热处理，超长使用寿命；优质芯片，高显指，高光效；产品符合国际认证标准；产品通用化，丰富的防眩前罩，满足不同照明效果需求；支架上设计有刻度盘，可多角度调节，水平355°，垂直90°；可配调光驱动器，支持DALI调光系统，实现节能定制照明；整灯可徒手拆卸更换，安装方便，能满足在服装店、家具店、博物馆等不同场所的照明需求。




Dimensions 产品尺寸 (Unit: mm)

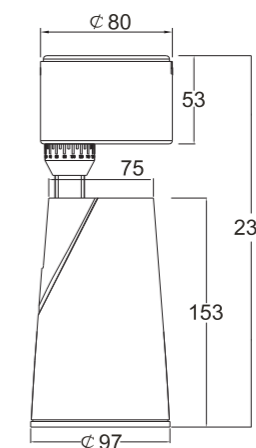

Photometric Diagram 光度分布图



30W 24° 3000K CRI>80



35W 24° 3000K CRI>80

Order Information 产品信息

Mode 型号	Power 功率	Input voltage 输入电压	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RM9530-930XY	30W	AC220-240V 50/60Hz	720mA	3000K	12° 2840lm/24° 2728lm	>90	≥0.95
RM9535-930XY	35W	AC220-240V 50/60Hz	850mA	3000K	12° 3125lm/24° 3001lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

SURFACE-MOUNTED DOWN LIGHT SERIES

明装筒灯系列



Model.型号

SMS
SMR

Power.功率

15 / 25 / 35W
15 / 25 / 35W


Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square and Round type for options
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available


- 所有配件均由KWT 自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形和方形供选择
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



Dimensions 产品尺寸 (Unit: mm)

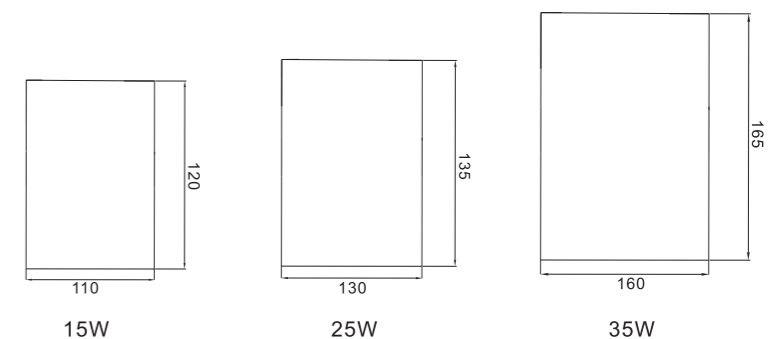

Photometric Diagram 光度分布图

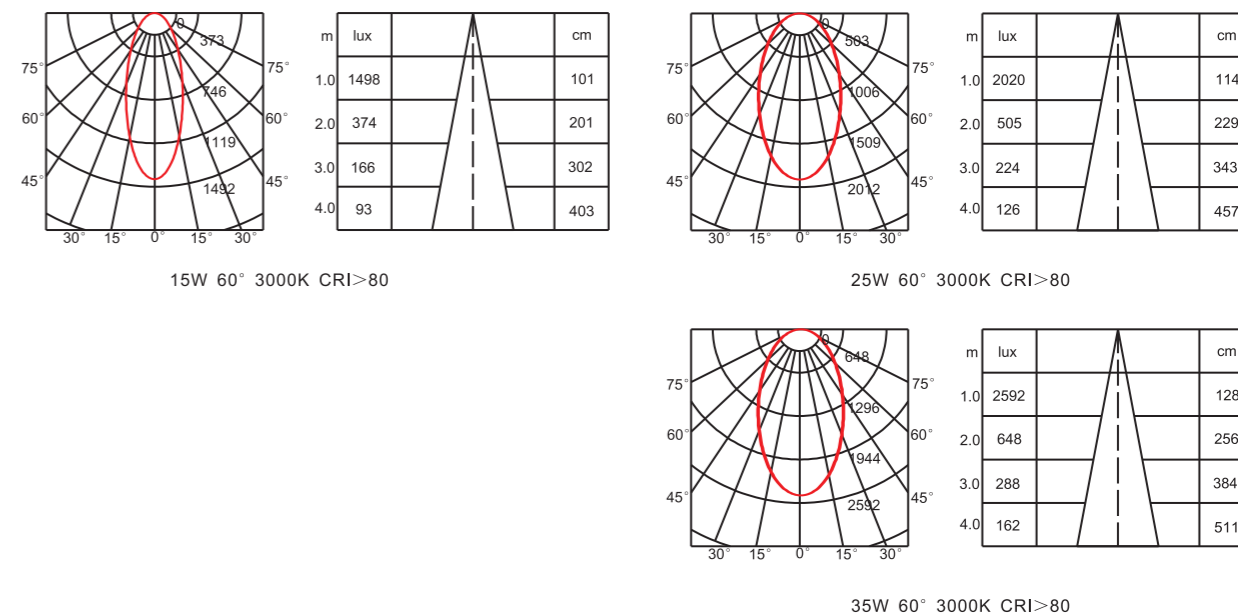

CITIZEN COB

SDCM

<3



15W / 25W / 35W

Color

White



60°

CRI

>90



AC220-240V 50/60Hz

5 YEAR

5 Years Warranty
5年质保

SMS Series

SMS Series surfacemounted downlight to meet any applactions includes Hotel, Shopping Mall , Hospital , Metro Station ,Apartment etc . Glare free UGR<19 . No flickery , 5 Years warranty for options . Life time over 50,000hrs .Operation temperature -25℃+50℃.

SMS系列明装筒灯可广泛应用于酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25℃+50℃。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
SMS0415-C930 SMS0415-C940	15W	360mA	3000K 4000K	1187lm 1275lm	>90	≥0.95
SMS0525-C930 SMS0525-C940	25W	600mA	3000K 4000K	1982lm 2120lm	>90	≥0.95
SMS0635-C930 SMS0635-C940	35W	850mA	3000K 4000K	2933lm 3138lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)


Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Die-cast aluminium heatsink to meet economic price
- Square and Round type for options
- CITIZEN COB LED with step 2 to ensure the SDCM <3
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available


- 所有配件均由KWT 自己设计、自己开模生产
- 压铸灯体，性价比更高
- 有圆形和方形供选择
- 西铁城2步光源，确保色容差真正能够小于3
- 高显色指数，标准产品均为90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



Dimensions 产品尺寸 (Unit: mm)

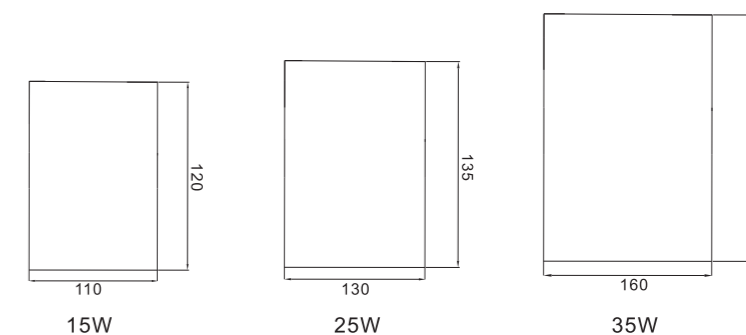

Photometric Diagram 光度分布图

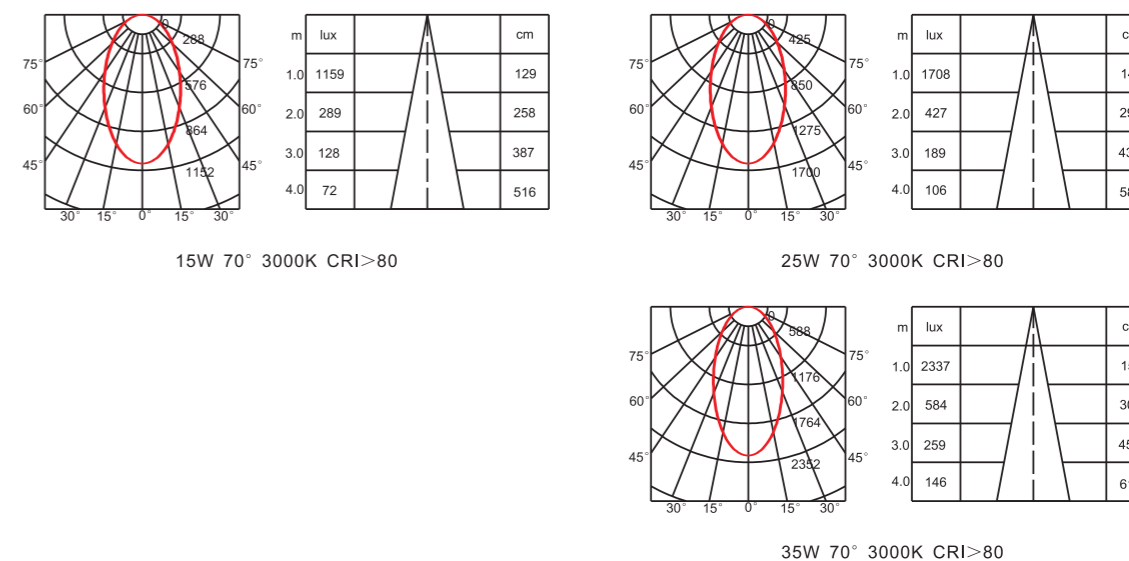

- CITIZEN COB
- SDCM <3
- 15W / 25W / 35W
- Color White
- 70°
- CRI >90
- AC220-240V 50/60Hz
- 5 Years Warranty
5年质保

SMR Series

SMR Series surfacemounted downlight to meet any applactions includes Hotel, Shopping Mall , Hospital , Metro Station ,Apartment etc . Glare free UGR<19 . No flickery , 5 Years warranty for options . Life time over 50,000hrs .Operation temperature -25℃~+50℃.

SMR系列明装筒灯可广泛应用于酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，高显色指数，低色容差，5年质保。寿命长达50000小时，工作温度-25℃~+50℃。

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
SMR0415-C930 SMR0415-C940	15W	360mA	3000K 4000K	1285lm 1387lm	>90	≥0.95
SMR0525-C930 SMR0525-C940	25W	600mA	3000K 4000K	2200lm 2355lm	>90	≥0.95
SMR0635-C930 SMR0635-C940	35W	850mA	3000K 4000K	3350lm 3468lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

SUSPENDED LIGHT SERIES

吊灯系列

Model.型号

RP55

Power.功率

8 / 15 W





Advantages 产品优势

- High Ra > 90, Low SDCM < 3
- High efficiency, high illuminance
- Glare-free design, perfect light spot and accurate beam angle, make surroundings of comfortable illumination
- Non-flicker driver for superior surrounding lighting requirement
- Integrated molded light housing with convective holes for better heat dissipation, interior driver, low-temperature operation guaranteed
- Refined components and design, guarantee a long life span of over 40,000 hours

- 高显指大于90, 低色容差SDCM小于3
- 高光效, 高亮度
- 防眩设计, 光斑均匀并光束角精准来制造舒适的照明环境
- 使用无频闪电源去达到优质的照明环境需求
- 使用对流散热孔的一体式散热器来实现更好的散热, 内置电源, 低温, 确保品质需求
- 精致的部件和设计, 保证使用寿命超过40,000小时











Black fixed ring
黑色防眩圈



White fixed ring
白色防眩圈



Gold fixed ring
金色防眩圈

- | | | | |
|---|--------------------|---|--------------------------|
|  | CITIZEN COB |  | SDCM < 3 |
|  | 8W / 15W |  | Color Black / White |
|  | 24° / 36° |  | CRI > 90 |
|  | AC220-240V 50/60Hz |  | 5 Years Warranty
5年质保 |


RP55 Series

RP55 Series originally researched and developed by KWT, high-end spotlight with interior driver. 55mm diameter face cover, integrated molded lamp housing of CNC aluminum, use international top COB CITIZEN chip, PC reflector, mirror-finish anodized, reflective rate > 95%, with first-rate lighting control effect, various beam angle 24°, 36° for option, stable specifications, glare-free, good heat sink, brilliant quality, more than 40,000 hours life span.


RP55系列采用高导热的铝散热器, 高品质西铁城光源, 可匹配白色、黑色、金色三种防眩圈, 内置恒流驱动电源, 以满足不同的需求。防眩光的设计, 完美的光斑和准确的光束角度, 营造舒适的光环境。整灯寿命超过40,000小时的使用寿命。



Dimensions 产品尺寸 (Unit: mm)

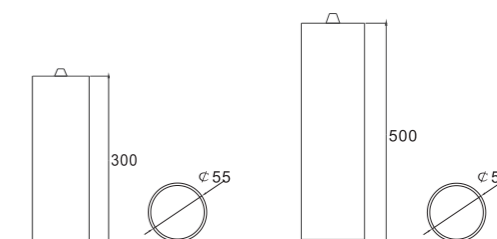

Photometric Diagram 光度分布图

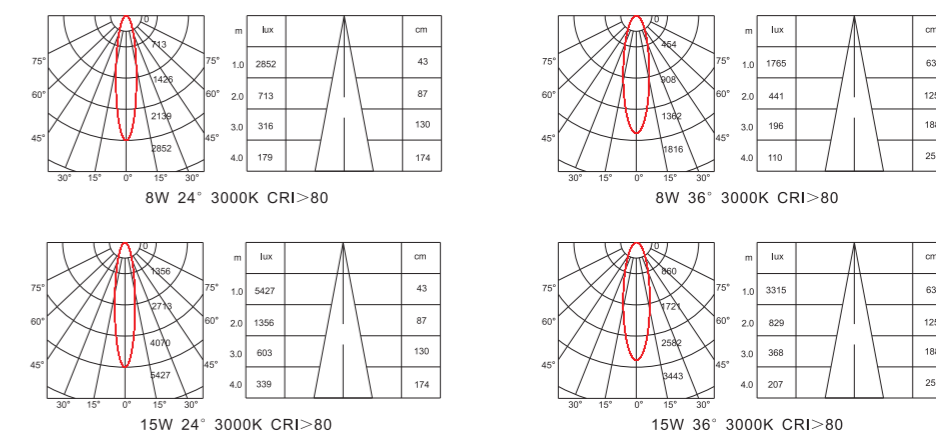

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PF 功率因数
RP5508-930XY RP5508-940XY	8W	210mA	3000K 4000K	24° 554lm/36° 572lm 24° 595lm/36° 610lm	>90	≥0.9
RP5515-930XY RP5515-940XY	15W	400mA	3000K 4000K	24° 1013lm/36° 1053lm 24° 1083lm/36° 1127lm	>90	≥0.9

Remark 备注: X=F(ON-OFF) X=T(Triac Dim) Y=B(Black) Y=W(White)

MAGNET LAMP SERIES

磁吸灯系列

Dim:0-10V/DALI Dimmable
调光方式：0-10V/DALI 调光



Product characteristics: 产品特点

- | | |
|--|--------------------------|
| 1. Sino-European designer cooperation, humanized design; | 1、中欧设计师合作，人性化设计； |
| 2. DC24V working at low voltage to ensure the safety of electric shock; | 2、DC24V低压工作，确保触电安全； |
| 3. Safety clamp design to ensure that it will not fall off for long using time; | 3、安全卡口式设计，确保久用不掉落； |
| 4. Surface nano-oxidation treatment, high-grade and beautiful; | 4、表面纳米氧化处理，高档美观； |
| 5. Magnets adsorb, and the creation of secondary lighting is more casual; | 5、磁铁吸附，二次灯光创作更随性； |
| 6. Anti-glare design, more comfortable lighting environment; | 6、防眩设计，照明环境更舒适； |
| 7. All kinds of light are assembled, and the lighting effect is guaranteed; | 7、各式灯具随意组合，照明效果有保障； |
| 8. Use high-quality aluminium material, heat dissipation is better, more sense of reality; | 8、采用高质量铝材，散热更好，更有质感； |
| 9. Fashionable and beautiful, concise and generous, easy to install, leading the future trend. | 9、时尚美观，简洁大方，安装便捷，引领未来潮流。 |


Model.型号

MLS 01 / 03 / 05 / 10
MGS 03 / 05 / 10
MLL 300 / 640 / 960
MGL 300 / 640
MW 300 / 640 / 960
MS54
MS112
MS76
MS55 / MP55


Power.功率

1 / 3 / 5 / 10*1W/2W
3 / 5 / 10*1W/2W
10 / 20 / 30W
10 / 20W
10 / 20 / 30W
15W
15 / 20 / 25 / 30W
15 / 20 / 25W
8/15W


Tarck Series 轨道系列



Surface mounted
Recessed
Suspended




Recessed Only

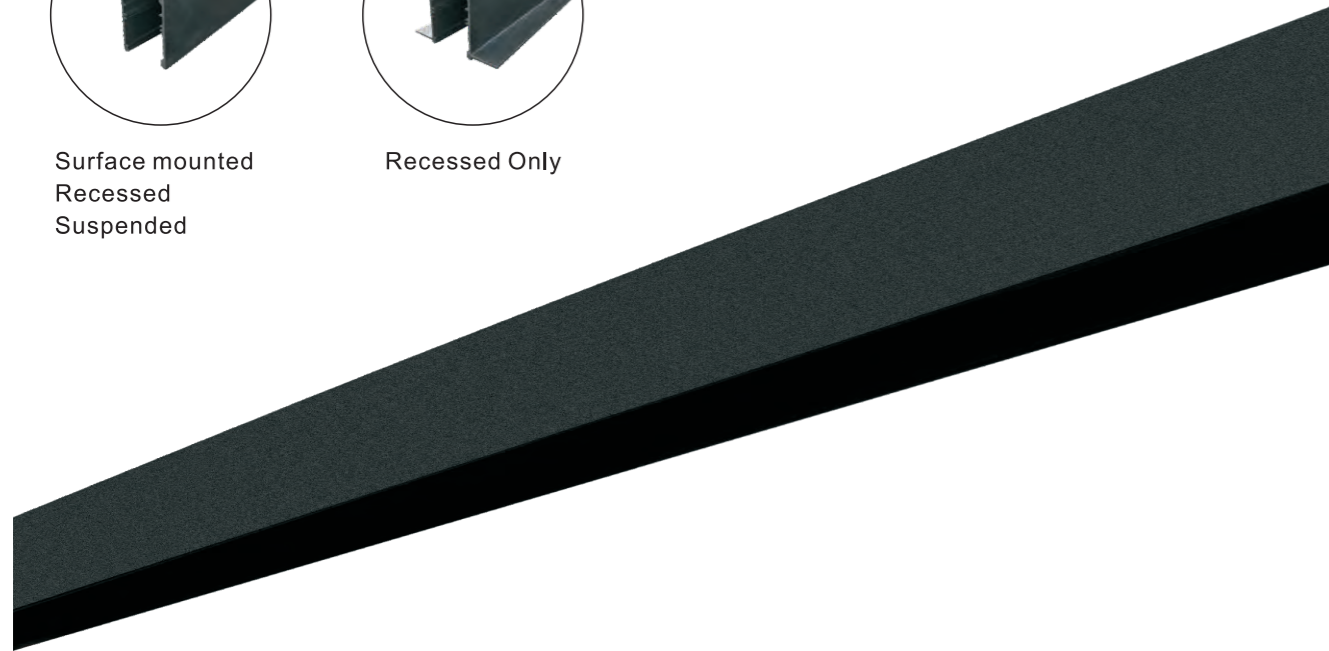


Installation way 安装方式


Surface mounted
(明装)



pendent
(吊装)




recessed without wings
(嵌装)



Cut out: W50mm, H120mm
开孔尺寸: 宽50mm, 高120mm

recessed with wings
(带边嵌装)



Cut out: W55mm, H90mm
开孔尺寸: 宽55mm, 高90mm

Product Specifications 产品规格

Item No.: Track
 Installs Way: Recessed with wings / Recessed
 Suspension / Surface mounted
 Length: 0.5M / 1M / 1.5M / 2M / 3M
 Colour: Sand white / Sand black
 Material: Aluminum
 Output Voltage: 24V DC
 Maximum load current: 16A
 Track maximum load power: 384W track longest 20m



产品名称: 轨道
 安装方式: 嵌装带边 / 嵌装 / 吊装 / 明装
 长度: 0.5M / 1M / 1.5M / 2M / 3M
 颜色: 砂纹白 / 砂纹黑
 材质: 型材铝
 输出电压: 24V DC
 最大负载电流: 16A
 轨道最大负载功率: 384W 轨道最长连接20米



Accessories 配件

<p>Recessed kit (无边导轨嵌装配件)</p> <p>RC01</p>	<p>Suspension wires (吊装吊线)</p> <p>SM01</p>	<p>Suspension rod (吊装吊杆)</p> <p>SM02</p>	<p>Track connector (导轨连接器)</p> <p>TC01</p>	<p>Track PC cover (轨道PC盖板)</p> <p>TC1000</p>	<p>Track End Cap (轨道PC盖板)</p> <p>EC01</p>
<p>Trimless Track Horizontal L connector (水平90D转接器)</p> <p>TC9001</p>	<p>Track vertical L connector (垂直90D转接器)</p> <p>TC9002</p>	<p>Recessed Track Horizontal L connector with wings (水平90度带边嵌入转接器)</p> <p>TC9003</p>	<p>Recessed Track Cross Connector With Wings (十字带边接驳器)</p> <p>TC9004</p>	<p>Recessed Track T Connector With Wings (T型带边接驳器)</p> <p>TC9005</p>	
<p>Trimless Track Cross Connector (十字无边接驳器)</p> <p>TC9006</p>	<p>Trimless Track T Connector (T型无边接驳器)</p> <p>TC9007</p>	<p>Straight Track Connector (直线拼接接驳器)</p> <p>PL02</p>	<p>L Type Connector (L型拼接导电盒)</p> <p>PL03</p>	<p>Power Connector Box (电源连接盒)</p> <p>PL05</p>	

M-Linear Light Series 磁吸线性灯系列

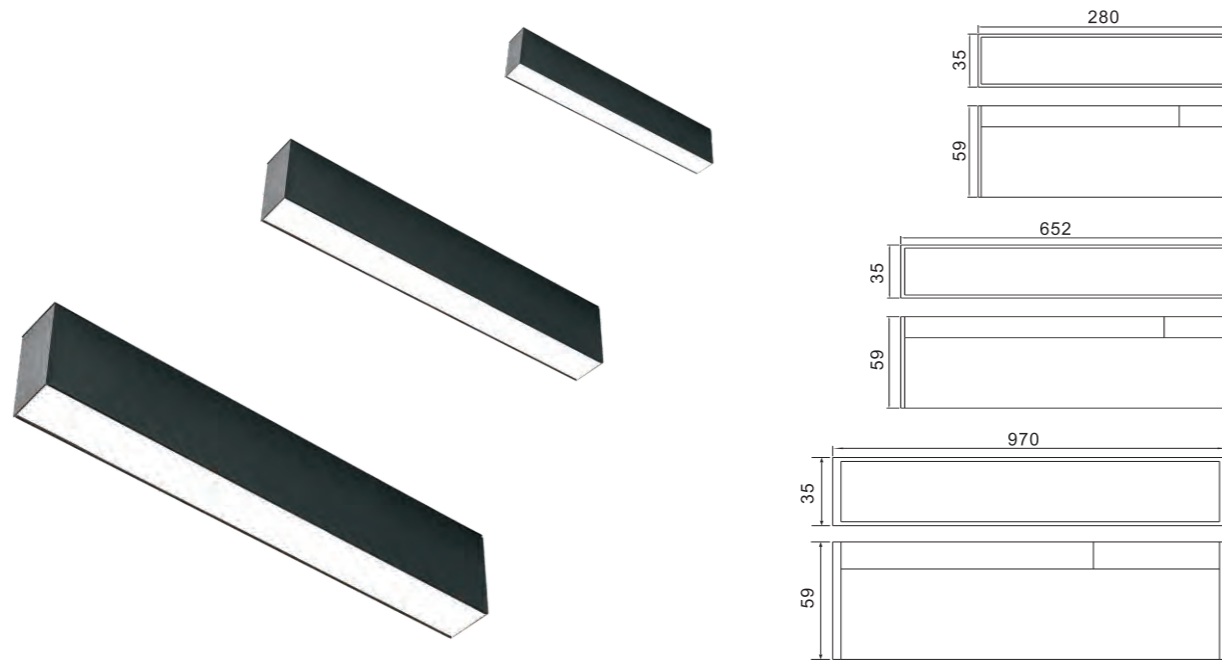

Product Specifications 产品规格

Item No.: MLL300 MLL640 MLL960

Power: 10W / 20W / 30W

Beam Angle: 120°

Light Source: OSRAM SMD

Colour Temperature: 2700K / 3000K / 4000K / 5000K

Colour: Sand white / Sand black

CRI: > 90

Material: Aluminium

Input Voltage: DC 24V

Dim: 0-10V / Dali Dimmable

产品型号: MLL300 MLL640 MLL960

功率: 10W / 20W / 30W

光束角: 120°

光源: 欧司朗

色温: 2700K / 3000K / 4000K / 5000K

颜色: 砂纹白 / 砂纹黑


显指: >90

材质: 型材铝

输入电压: DC 24V

调光方式: 0-10V / Dali调光

M-Linear Spotlight Series 磁吸防眩射灯系列

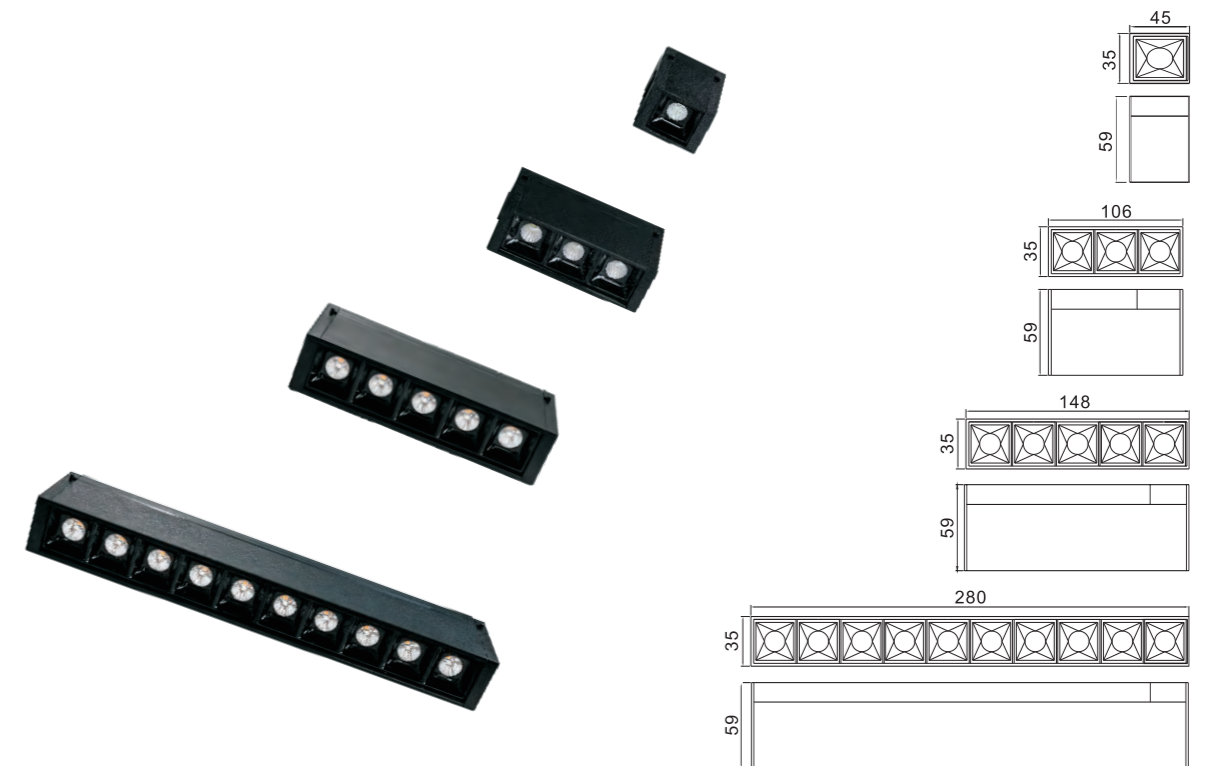

Product Specifications 产品规格

Item No.: MLS01 MLS03 MLS05 MLS10

Power: 1*1W / 3*1W / 5*1W / 10*1W
3*2W / 5*2W / 10*2W

Beam Angle: 15° / 30° / 45°

Light Source: OSRAM

Colour Temperature: 2700K / 3000K / 4000K / 5000K

Colour: Sand white / Sand black

CRI: > 90

Material: Aluminium

Input Voltage: DC 24V

Dim: 0-10V / Dali Dimmable

产品型号: MLS01 MLS03 MLS05 MLS10

功率: 1*1W / 3*1W / 5*1W / 10*1W
3*2W / 5*2W / 10*2W

光束角: 15° / 30° / 45°

光源: 欧司朗

色温: 2700K / 3000K / 4000K / 5000K

颜色: 砂纹白 / 砂纹黑



显指: > 90

材质: 型材铝

输入电压: DC 24V

调光方式: 0-10V / Dali调光

M-Wall Washer Light Series 磁吸偏光洗墙灯系列

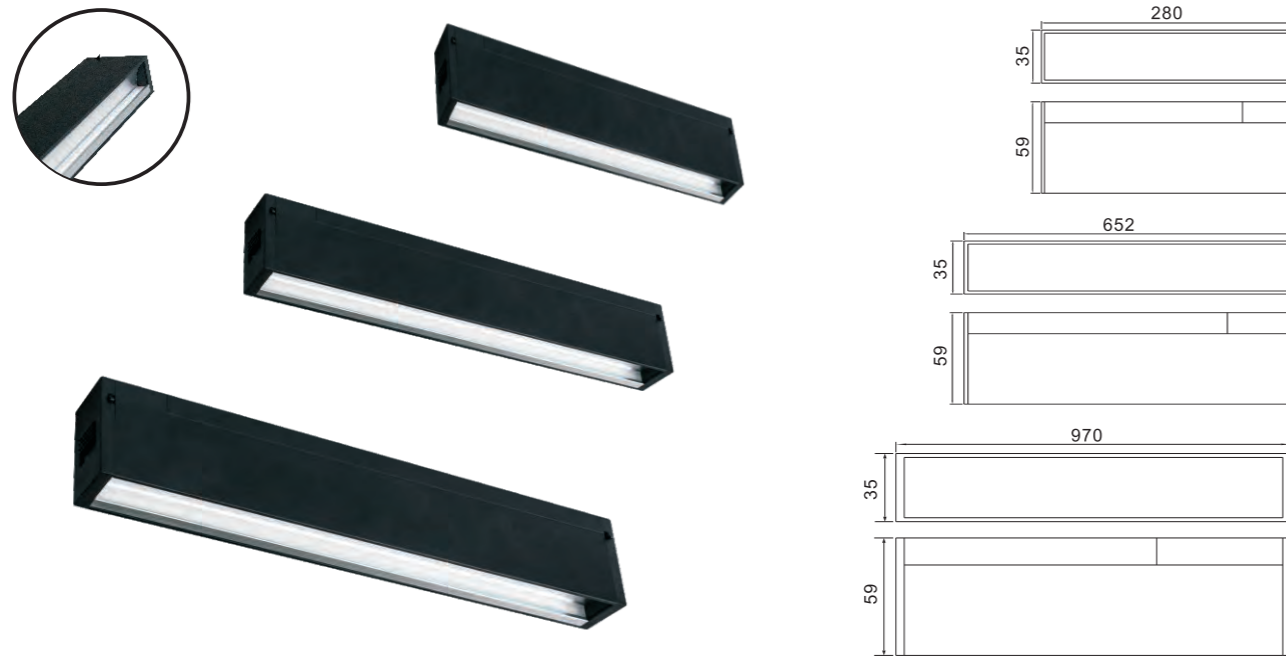

Product Specifications 产品规格

Item No.: MW300 MW640 MW960

Power: 10W / 20W / 30W

Beam Angle: Partial flooding angle 120°

Light Source: OSRAM SMD

Colour Temperature: 2700K / 3000K / 4000K / 5000K

Colour: Sand white / Sand black

CRI: > 90

Material: Aluminium

Input Voltage: DC 24V

Dim: 0-10V / Dali Dimmable

产品型号: MW300 MW640 MW960

功率: 10W / 20W / 30W

光束角: 偏泛光角度120°

光源: 欧司朗

色温: 2700K / 3000K / 4000K / 5000K

颜色: 砂纹白 / 砂纹黑


显指: > 90

材质: 型材铝

输入电压: DC 24V

调光方式: 0-10V / Dali调光

M-Gimbal Linear Light Series 磁吸转动线性灯系列



Product Specifications 产品规格

Item No.: MGL300 MGL640

Power: 10W / 20W

Beam Angle: 120°

Light Source: OSRAM SMD

Colour Temperature: 2700K / 3000K / 4000K / 5000K

Colour: Sand white / Sand black

CRI: > 90

Material: Aluminium

Input Voltage: DC 24V

Dim: 0-10V / Dali Dimmable

产品型号: MGL300 MGL640

功率: 10W / 20W

光束角: 120°

光源: 欧司朗

色温: 2700K / 3000K / 4000K / 5000K

颜色: 砂纹白 / 砂纹黑



显指: >90

材质: 型材铝

输入电压: DC 24V

调光方式: 0-10V / Dali调光

M-Gimbal Linear Spotlight Series 磁吸转动防眩射灯系列

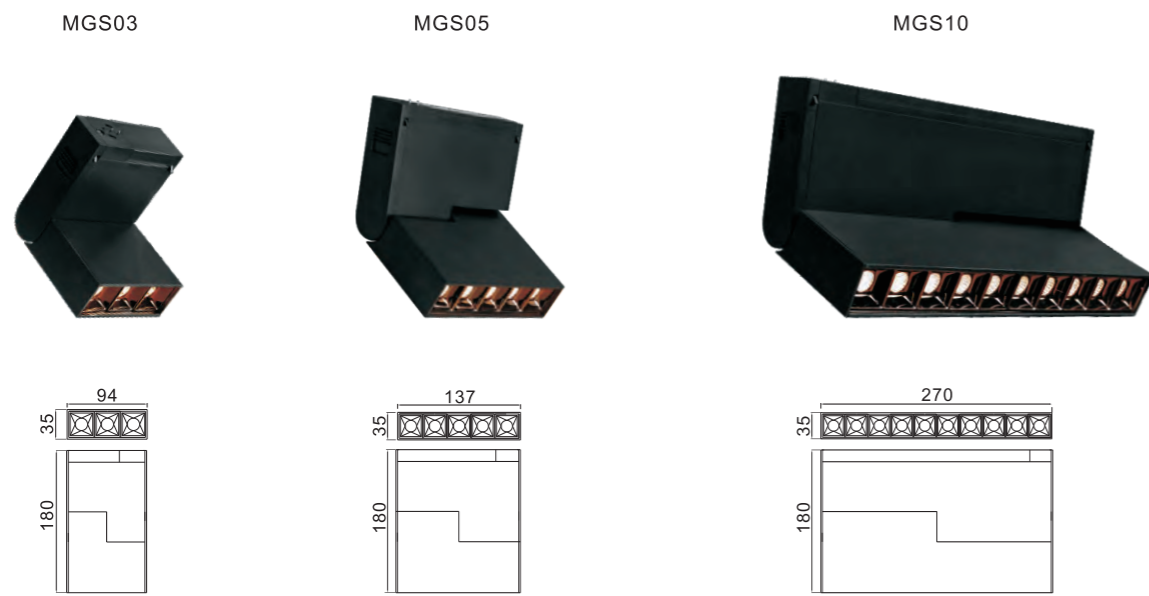

Product Specifications 产品规格

Item No.: MGS03 MGS05 MGS10

Power: 3*1W / 5*1W / 10*1W
3*2W / 5*2W / 10*2W

Beam Angle: 15° / 30° / 45°

Light Source: OSRAM

Colour Temperature: 2700K / 3000K / 4000K / 5000K

Colour: Sand white / Sand black

CRI: >90

Material: Aluminium

Input Voltage: DC 24V

Dim: 0-10V / Dali Dimmable

产品型号: MGS03 MGS05 MGS10

功率: 3*1W / 5*1W / 10*1W
3*2W / 5*2W / 10*2W

光束角: 15° / 30° / 45°

光源: 欧司朗

色温: 2700K / 3000K / 4000K / 5000K

颜色: 砂纹白 / 砂纹黑



显指: >90

材质: 型材铝

输入电压: DC 24V

调光方式: 0-10V / Dali调光

M-Spotlight Series 磁吸射灯系列

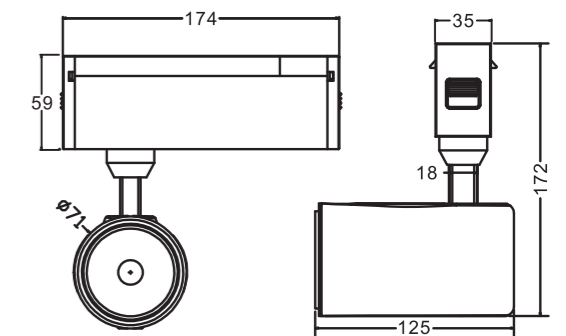

Product Specifications 产品规格

Item No.: MS54

Power: 15W

Beam Angle: 15° / 24° / 36°

Light Source: CITIZEN

Colour Temperature: 2700K / 3000K / 4000K

Colour: Sand white / Sand black

CRI: > 90

Material: Aluminium

Input Voltage: DC 24V

Dim: 0-10V / Dali Dimmable

产品型号: MS54

功率: 15W

光束角: 15° / 24° / 36°

光源: 西铁城

色温: 2700K / 3000K / 4000K

颜色: 砂纹白 / 砂纹黑



显指: >90

材质: 型材铝

输入电压: DC 24V

调光方式: 0-10V / Dali调光

M-Spotlight Series 磁吸射灯系列


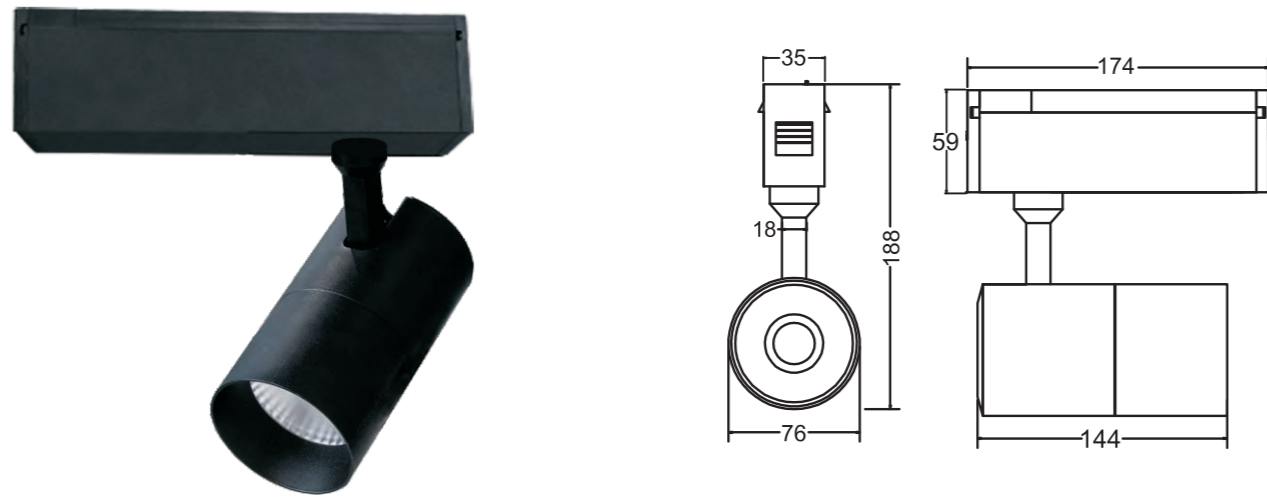


Product Specifications 产品规格

Item No.: MS76
 Power: 15W / 20W / 25W
 Beam Angle: 15° / 24° / 36°
 Light Source: CITIZEN
 Colour Temperature: 2700K / 3000K / 4000K
 Colour: Sand white / Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC 24V
 Dim: 0-10V / Dali Dimmable

产品型号: MS76
 功率: 15W / 20W / 25W
 光束角: 15° / 24° / 36°
 光源: 西铁城
 色温: 2700K / 3000K / 4000K
 颜色: 砂纹白 / 砂纹黑
 显指: >90
 材质: 型材铝
 输入电压: DC 24V
 调光方式: 0-10V / Dali调光

M-Spotlight Series 磁吸射灯系列


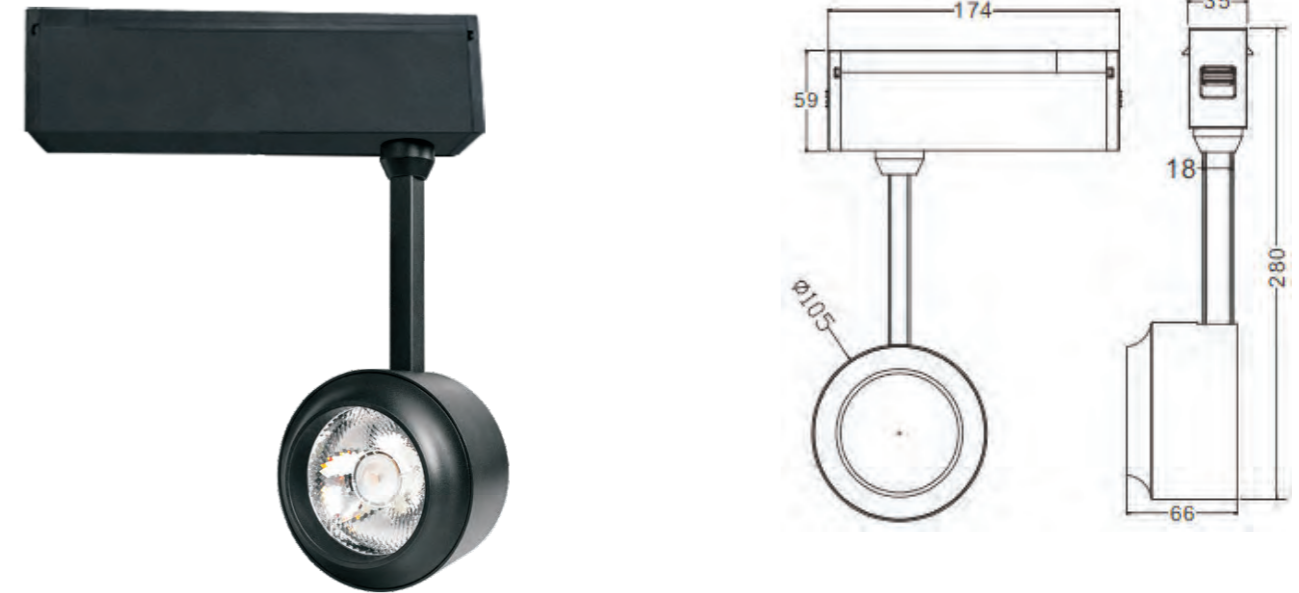


Product Specifications 产品规格

Item No.: MS112
 Power: 15W / 20W / 25W / 30W
 Beam Angle: 15° / 24° / 36°
 Light Source: CITIZEN
 Colour Temperature: 2700K / 3000K / 4000K
 Colour: Sand white / Sand black
 CRI: > 90
 Material: Aluminium
 Input Voltage: DC 24V
 Dim: 0-10V / Dali Dimmable

产品型号: MS112
 功率: 15W / 20W / 25W / 30W
 光束角: 15° / 24° / 36°
 光源: 西铁城
 色温: 2700K / 3000K / 4000K
 颜色: 砂纹白 / 砂纹黑
 显指: >90
 材质: 型材铝
 输入电压: DC 24V
 调光方式: 0-10V / Dali调光

M-Spotlight Series 磁吸射灯系列


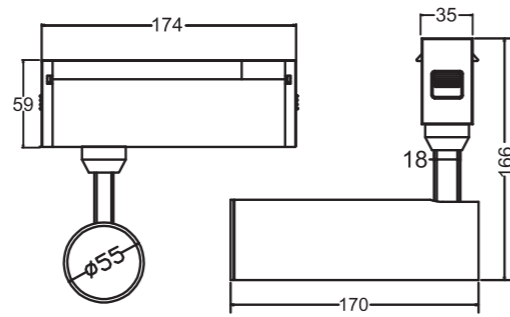


Product Specifications 产品规格

Item No.: MS55
 Power: 8W/15W
 Beam Angle: 15° /24° /36°
 Light Source: CITIZEN
 Colour Temperature: 2700K / 3000K / 4000K
 Colour: Sand white / Sand black
 CRI: >90
 Material: Aluminium
 Input Voltage: DC 24V
 Dim: 0-10V / Dali Dimmable

产品型号: MS55
 功率: 8W/15W
 光束角: 15° /24° /36°
 光源: 西铁城
 色温: 2700K / 3000K / 4000K
 颜色: 砂纹白 / 砂纹黑
 显指: >90
 材质: 型材铝
 输入电压: DC 24V
 调光方式: 0-10V / Dali调光

M-Spotlight Series 磁吸射灯系列

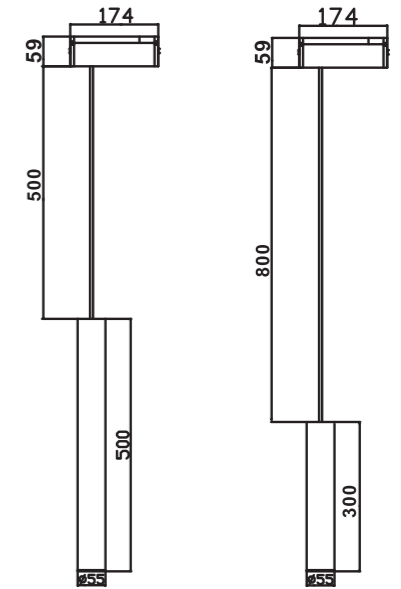

Product Specifications 产品规格

Item No.: MP55
 Power: 8W / 15W
 Beam Angle: 15° /24° /36°
 Light Source: CITIZEN
 Colour Temperature: 2700K / 3000K / 4000K
 Colour: Sand white / Sand black
 CRI: >90
 Material: Aluminium
 Input Voltage: DC 24V
 Dim: 0-10V / Dali Dimmable

产品型号: MP55
 功率: 8W / 15W
 光束角: 15° /24° /36°
 光源: 西铁城
 色温: 2700K / 3000K / 4000K
 颜色: 砂纹白 / 砂纹黑
 显指: >90
 材质: 型材铝
 输入电压: DC 24V
 调光方式: 0-10V / Dali调光

LINEAR LIGHT SERIES

线型灯系列

Model.型号

L12P6 × 1 × 10S5 × 2 × 2
L12S1 × 20 × 1
L12S5 × 3 × 2
L12S5 × 8
L15P6 × 2 × 10S5 × 2 × 2
L15S5x6x2


Power.功率

30W
20W
30W
40W
40W
60W



Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Aluminium profile heatsink to meet best heat dissipation
- Different Length and power to meet project request
- Spotlight , General light ,blind cover free combination
- Recessed , Surface mounted , Suspension type for options
- SMD LED
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized function is available
- 所有配件均由KWT 自己设计、自己开模生产
- 型材灯体，散热更好
- 根据应用场所可选择不同长度，组合和功率
- 安装方式有嵌入，明装和吊装
- 防眩射灯，亚克力泛光模组自由组合，实用更时尚
- SMD 光源
- 高显色指数，标准产品均大于90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制

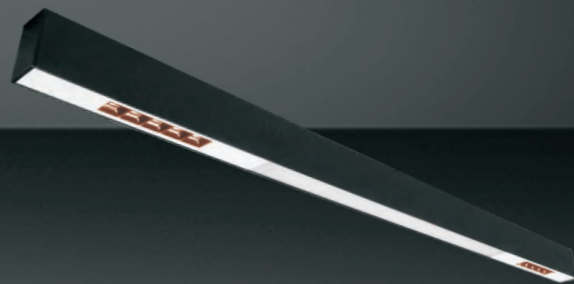

SMD



<3



30W



Black



15° /34° /48°



1200*43*68mm



AC 220-240V 50/60Hz



5 Years Warranty
5年质保


LED Linear light: L4368 Series

L4368 Series Linear Light is a new design type with gathering point and surface illumination. According to the requirements of application occasions, the spotlight and acrylic flooding can be freely combined, and the length and power can be selected according to actual use. Humanized lighting brings comfortable and fashionable experience to the space. It could to meet any applications includes Office,Hotel,Shopping mall,Hospital,Metro Station and Apartment etc. Simple and generous style, fashionable, lighting and decoration is the first light type. Anti-glare design, no flickery, CRI>90,SDCM<3, 5 years warranty. Life up to 50000 hours, working temperature -25°C - +50°C


L4368 系列线条灯是一款集点，和面发光的新式线条灯，根据应用场合的需求，射灯和亚克力泛光可自由组合，长度和功率可根据实际使用选择组合。人性化照明，给空间带来舒适和时尚的体验。可广泛应用于办公室，酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，显色指数大于90，色容差小于3，5年质保。寿命长达50000小时，工作温度-25°C-+50°C。




Dimensions 产品尺寸 (Unit: mm)

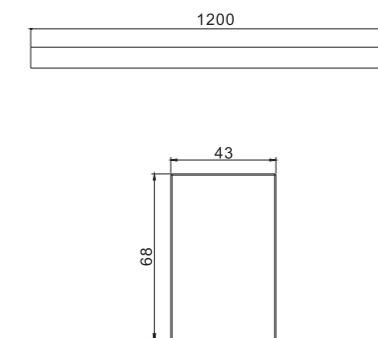

Photometric Diagram 光度分布图

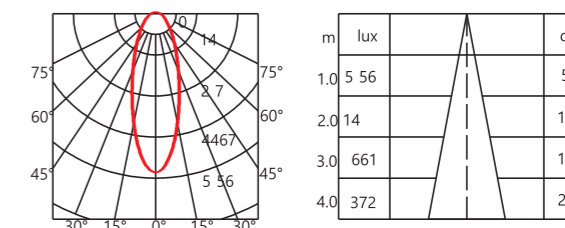

3000K Ra>80 Beam Angle=34°

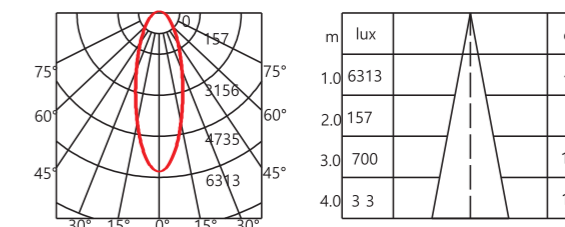

4000K CRI>80 Beam Angle=34°


Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
L12P6×1×10S5×2×2-930XY	30W	720mA	3000K	2144lm	>90	≥0.94
L12P6×1×10S5×2×2-940XY	30W	720mA	4000K	2250lm	>90	≥0.94

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Aluminium profile heatsink to meet best heat dissipation
- Different Length and power to meet project request
- Spotlight , General light ,blind cover free combination
- Recessed , Surfacedmounted , Suspension type for options
- SMD LED
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized function is available
- 所有配件均由KWT 自己设计、自己开模生产
- 型材灯体，散热更好
- 根据应用场所可选择不同长度，组合和功率
- 安装方式有嵌入，明装和吊装
- 防眩射灯，亚克力泛光模组自由组合，实用更时尚
- SMD 光源
- 高显色指数，标准产品均大于90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制

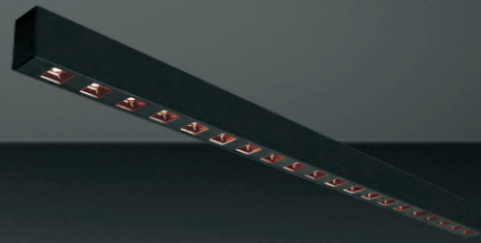

SMD



SDCM <3



20W



Color Black



15° /34° /48°



1200*43*68mm



AC 220-240V 50/60Hz




5 YEAR 5 Years Warranty 5年质保


LED Linear light: L4368 Series

L4368 Series Linear Light is a new design type with gathering point and surface illumination. According to the requirements of application occasions, the spotlight and acrylic flooding can be freely combined, and the length and power can be selected according to actual use. Humanized lighting brings comfortable and fashionable experience to the space. It could to meet any applications includes Office,Hotel,Shopping mall,Hospital,Metro Station and Apartment etc. Simple and generous style, fashionable, lighting and decoration is the first light type. Anti-glare design, no flickery, CRI>90,SDCM<3, 5 years warranty. Life up to 50000 hours, working temperature -25°C - +50°C


L4368 系列线条灯是一款集点，和面发光的新式线条灯，根据应用场合的需求，射灯和亚克力泛光可自由组合，长度和功率可根据实际使用选择组合。人性化照明，给空间带来舒适和时尚的体验。可广泛应用于办公室，酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，显色指数大于90，色容差小于3，5年质保。寿命长达50000小时，工作温度-25°C-+50°C。

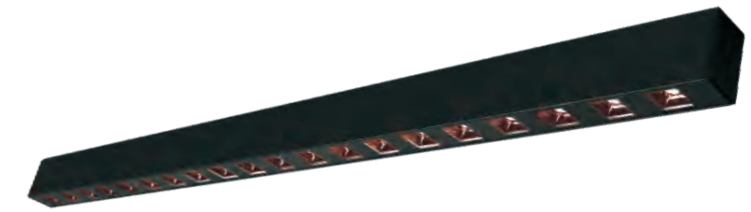


Dimensions 产品尺寸 (Unit: mm)

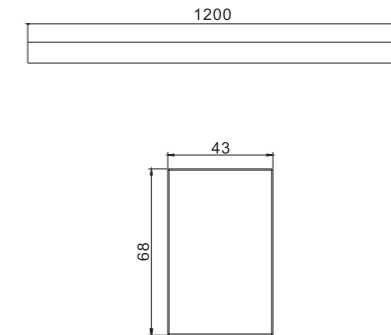

Photometric Diagram 光度分布图

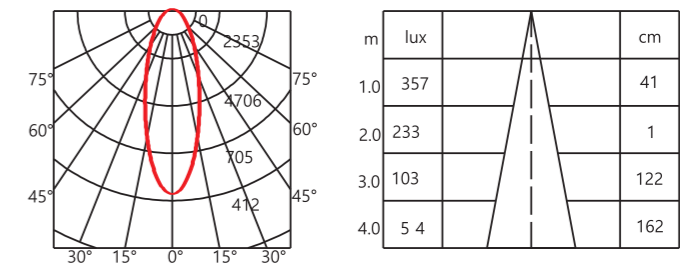

3000K Ra>80 Beam Angle=34°

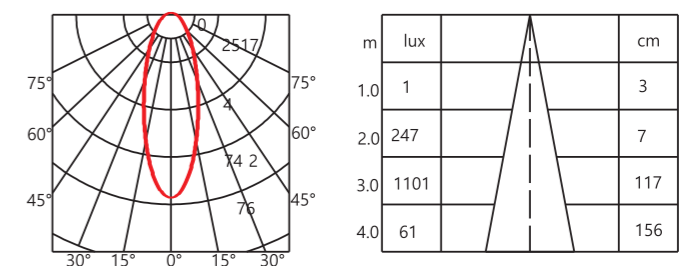

4000K CRI>80 Beam Angle=34°


Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
L12S1*20*1-930XY	20W	480mA	3000K	1677lm	>90	≥0.93
L12S1*20*1-940XY	20W	480mA	4000K	1790lm	>90	≥0.93

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Aluminium profile heatsink to meet best heat dissipation
- Different Length and power to meet project request
- Spotlight , General light ,blind cover free combination
- Recessed , Surfacedmounted , Suspension type for options
- SMD LED
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized function is available
- 所有配件均由KWT 自己设计、自己开模生产
- 型材灯体，散热更好
- 根据应用场所可选择不同长度，组合和功率
- 安装方式有嵌入，明装和吊装
- 防眩射灯，亚克力泛光模组自由组合，实用更时尚
- SMD 光源
- 高显色指数，标准产品均大于90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制

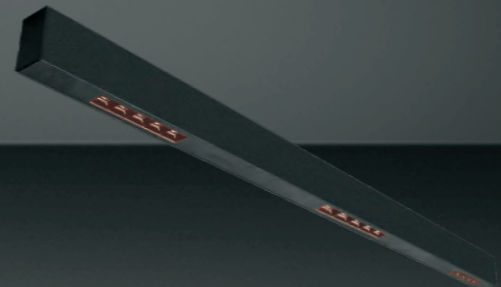

- SMD
- SDCM <3
- 30W
- Color Black
- 15° /34° /48°
- 1200*43*68mm
- AC 220-240V 50/60Hz
- 5 YEAR 5 Years Warranty 5年质保


LED Linear light: L4368 Series

L4368 Series Linear Light is a new design type with gathering point and surface illumination. According to the requirements of application occasions, the spotlight and acrylic flooding can be freely combined, and the length and power can be selected according to actual use. Humanized lighting brings comfortable and fashionable experience to the space. It could to meet any applications includes Office,Hotel,Shopping mall,Hospital,Metro Station and Apartment etc. Simple and generous style, fashionable, lighting and decoration is the first light type. Anti-glare design, no flickery, CRI>90,SDCM<3, 5 years warranty. Life up to 50000 hours, working temperature -25°C - +50°C


L4368 系列线条灯是一款集点，和面发光的新式线条灯，根据应用场合的需求，射灯和亚克力泛光可自由组合，长度和功率可根据实际使用选择组合。人性化照明，给空间带来舒适和时尚的体验。可广泛应用于办公室，酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，显色指数大于90，色容差小于3，5年质保。寿命长达50000小时，工作温度-25°C-+50°C。




Dimensions 产品尺寸 (Unit: mm)

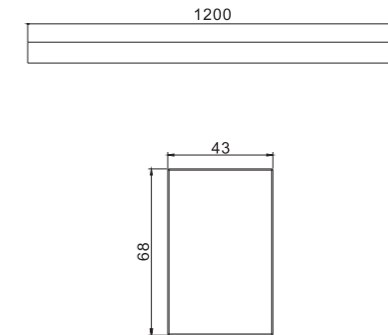

Photometric Diagram 光度分布图

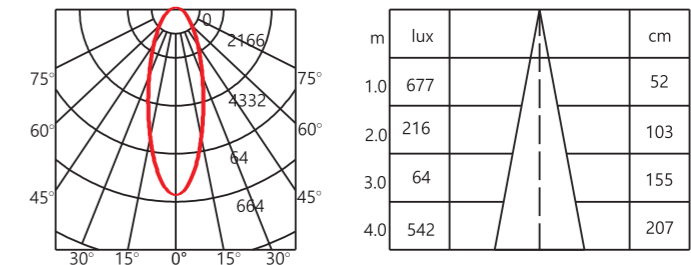

3000K Ra>80 Beam Angle=34°

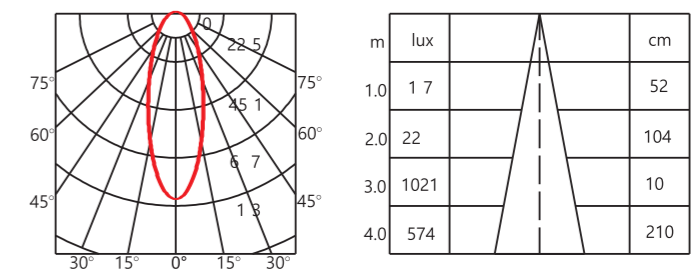

4000K CRI>80 Beam Angle=34°

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
L12S5*3*2-930XY	30W	720mA	3000K	2315lm	>90	≥0.95
L12S5*3*2-940XY	30W	720mA	4000K	2430lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Aluminium profile heatsink to meet best heat dissipation
- Different Length and power to meet project request
- Spotlight , General light ,blind cover free combination
- Recessed , Surfacedmounted , Suspension type for options
- SMD LED
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available
- 所有配件均由KWT 自己设计、自己开模生产
- 型材灯体，散热更好
- 根据应用场所可选择不同长度，组合和功率
- 安装方式有嵌入，明装和吊装
- 防眩射灯，亚克力泛光模组自由组合，实用更时尚
- SMD 光源
- 高显色指数，标准产品均大于90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



SMD



<3



40W



White



15° /34° /48°



1200*43*68mm



AC 220-240V 50/60Hz



5 Years Warranty
5年质保


LED Linear light: L4368 Series

L4368 Series Linear Light is a new design type with gathering point and surface illumination. According to the requirements of application occasions, the spotlight and acrylic flooding can be freely combined, and the length and power can be selected according to actual use. Humanized lighting brings comfortable and fashionable experience to the space. It could to meet any applications includes Office,Hotel,Shopping mall,Hospital,Metro Station and Apartment etc. Simple and generous style, fashionable, lighting and decoration is the first light type. Anti-glare design, no flickery, CRI>90,SDCM<3, 5 years warranty. Life up to 50000 hours, working temperature -25°C - +50°C


L4368 系列线条灯是一款集点，和面发光的新式线条灯，根据应用场合的需求，射灯和亚克力泛光可自由组合，长度和功率可根据实际使用选择组合。人性化照明，给空间带来舒适和时尚的体验。可广泛应用于办公室，酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，显色指数大于90，色容差小于3，5年质保。寿命长达50000小时，工作温度-25°C-+50°C。




Dimensions 产品尺寸 (Unit: mm)

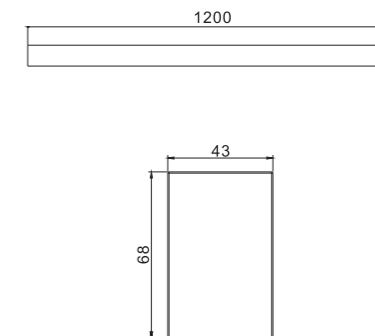

Photometric Diagram 光度分布图

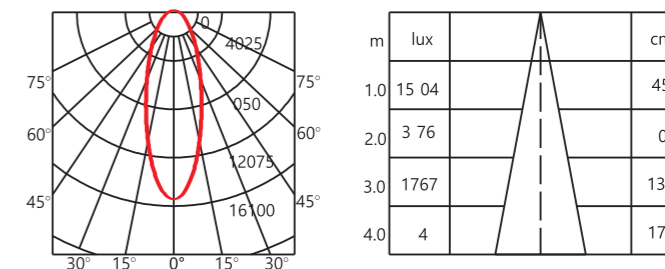

3000K Ra>80 Beam Angle=34°

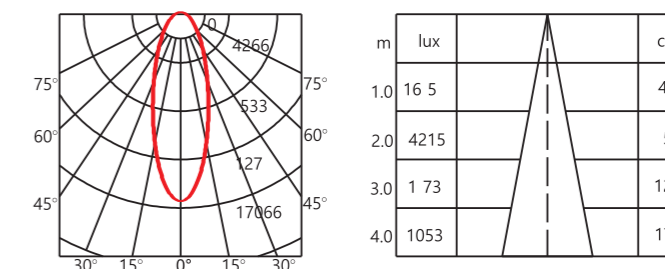

4000K CRI>80 Beam Angle=34°

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
L12S5×8-930XY	40W	960mA	3000K	3471lm	>90	≥0.96
L12S5×8-940XY	40W	960mA	4000K	3610lm	>90	≥0.96

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Aluminium profile heatsink to meet best heat dissipation
- Different Length and power to meet project request
- Spotlight , General light ,blind cover free combination
- Recessed , Surfacedmounted , Suspension type for options
- SMD LED
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized function is available
- 所有配件均由KWT 自己设计、自己开模生产
- 型材灯体，散热更好
- 根据应用场所可选择不同长度，组合和功率
- 安装方式有嵌入，明装和吊装
- 防眩射灯，亚克力泛光模组自由组合，实用更时尚
- SMD 光源
- 高显色指数，标准产品均大于90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制



SMD



SDCM <3



40W



Color White



15° /34° /48°



1200*43*68mm



AC 220-240V 50/60Hz



5 YEAR 5 Years Warranty 5年质保


LED Linear light: L4368 Series

L4368 Series Linear Light is a new design type with gathering point and surface illumination. According to the requirements of application occasions, the spotlight and acrylic flooding can be freely combined, and the length and power can be selected according to actual use. Humanized lighting brings comfortable and fashionable experience to the space. It could to meet any applications includes Office,Hotel,Shopping mall,Hospital,Metro Station and Apartment etc. Simple and generous style, fashionable, lighting and decoration is the first light type. Anti-glare design, no flickery, CRI>90,SDCM<3, 5 years warranty. Life up to 50000 hours, working temperature -25°C - +50°C


L4368 系列线条灯是一款集点，和面发光的新式线条灯，根据应用场合的需求，射灯和亚克力泛光可自由组合，长度和功率可根据实际使用选择组合。人性化照明，给空间带来舒适和时尚的体验。可广泛应用于办公室，酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，显色指数大于90，色容差小于3，5年质保。寿命长达50000小时，工作温度-25°C-+50°C。




Dimensions 产品尺寸 (Unit: mm)

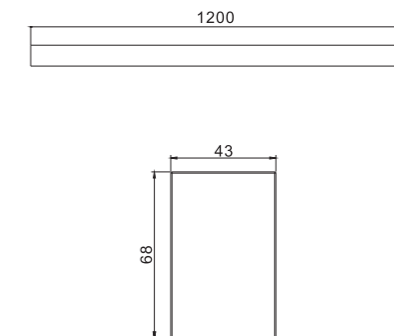

Photometric Diagram 光度分布图

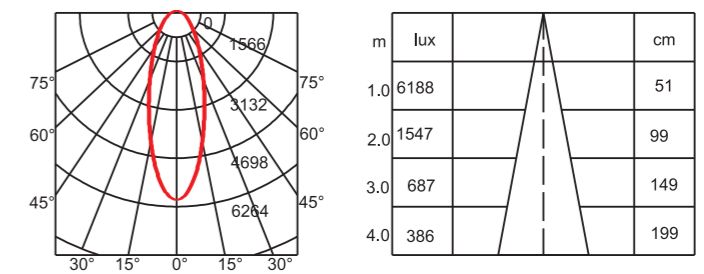

3000K Ra>80 Beam Angle=34°

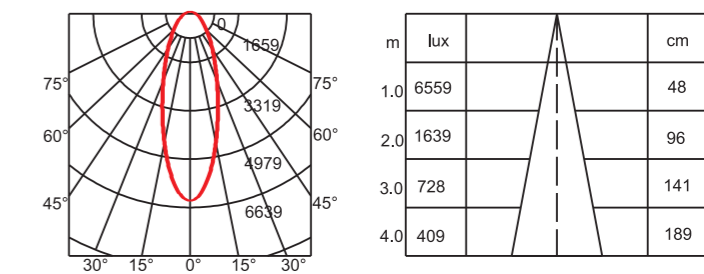

4000K CRI>80 Beam Angle=34°


Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
L15P6×2×10S5×2×2-930XY	40W	960mA	3000K	2268lm	>90	≥0.96
L15P6×2×10S5×2×2-940XY	40W	960mA	4000K	2410lm	>90	≥0.96

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

Advantages 产品优势

- All of parts designed and produced by KWT own tools
- Aluminium profile heatsink to meet best heat dissipation
- Different Length and power to meet project request
- Spotlight , General light ,blind cover free combination
- Recessed , Surfacedmounted , Suspension type for options
- SMD LED
- CRI>90Ra For standard production line .
- Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- CCT dimmable is available : 2500K-3000k / 2700K-5000K
- Customized funcation is available
- 所有配件均由KWT 自己设计、自己开模生产
- 型材灯体，散热更好
- 根据应用场所可选择不同长度，组合和功率
- 安装方式有嵌入，明装和吊装
- 防眩射灯，亚克力泛光模组自由组合，实用更时尚
- SMD 光源
- 高显色指数，标准产品均大于90Ra
- 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
- 调色温可选：2500K-3000k / 2700K-5000K
- 接受定制

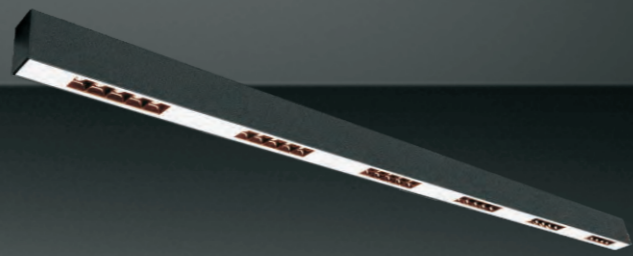

SMD



<3



60W



Black



15° /34° /48°



1200*43*68mm



AC 220-240V 50/60Hz




5 Years Warranty
5年质保


LED Linear light: L4368 Series

L4368 Series Linear Light is a new design type with gathering point and surface illumination. According to the requirements of application occasions, the spotlight and acrylic flooding can be freely combined, and the length and power can be selected according to actual use. Humanized lighting brings comfortable and fashionable experience to the space. It could to meet any applications includes Office,Hotel,Shopping mall,Hospital,Metro Station and Apartment etc. Simple and generous style, fashionable, lighting and decoration is the first light type. Anti-glare design, no flickery, CRI>90,SDCM<3, 5 years warranty. Life up to 50000 hours, working temperature -25°C - +50°C


L4368 系列线条灯是一款集点，和面发光的新式线条灯，根据应用场合的需求，射灯和亚克力泛光可自由组合，长度和功率可根据实际使用选择组合。人性化照明，给空间带来舒适和时尚的体验。可广泛应用于办公室，酒店，商场，医院，地铁，火车站等场所的照明。款式简单大方，不失时尚，是照明和装饰的首选灯型。防眩光设计，无频闪，显色指数大于90，色容差小于3，5年质保。寿命长达50000小时，工作温度-25°C-+50°C。

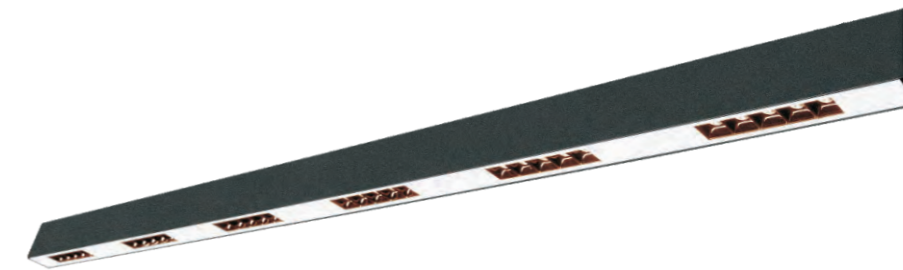


Dimensions 产品尺寸 (Unit: mm)

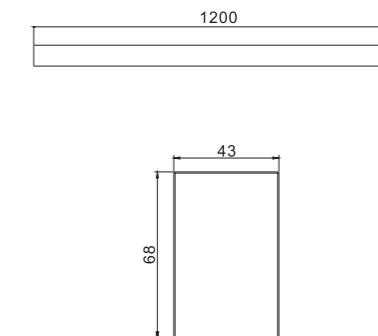

Photometric Diagram 光度分布图

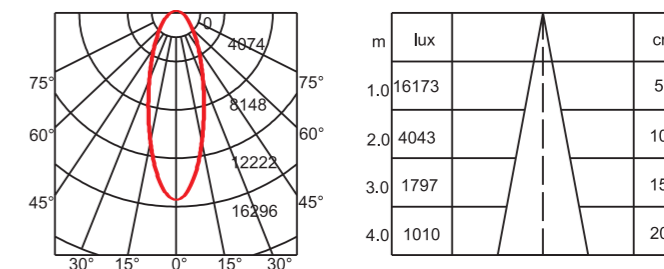

3000K Ra>80 Beam Angle=34°

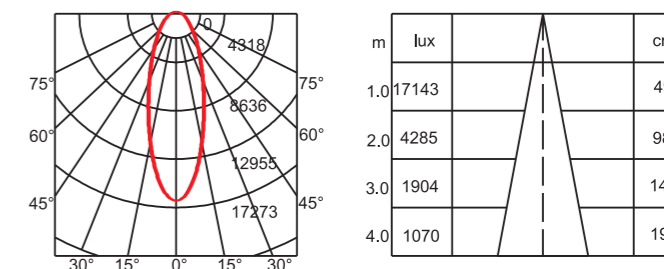

4000K CRI>80 Beam Angle=34°

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
L15S5x6x2-930XY	60W	1450mA	3000K	3912lm	>90	≥0.98
L15S5x6x2-940XY	60W	1450mA	4000K	4130lm	>90	≥0.98

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

LINEAR LIGHT SERIES

线型灯系列

Model.型号


LTD
LTC
LTG
LTR
L3875
L5575
L7080
LD50
LD60
LE16640
LE21640
LM4084

Power.功率

2 / 4 / 10 / 20 / 30W
10 / 20 / 30W
20 / 30 / 40 / 60W
2 / 4 / 10 / 20 / 30W
20 / 40 / 50W
20 / 40 / 50W
20 / 40 / 50W
20 / 40 / 50W
20 / 40 / 50W
30 / 50 / 60W
30 / 50 / 60W
30 / 50 / 60W




LTD Series

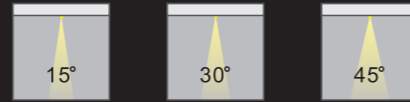

Advantages 产品优势


- All of parts designed and produced by KWT own tools
 - Aluminium profile heatsink to meet best heat dissipation
 - Different Length and power to meet project request
 - Recessed type with trim and trimless
 - Gimbal and fixed type for option
 - Osram LED with step 3 to ensure the SDCM <3
 - CRI>90Ra For standard production line .
 - Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
 - CCT dimmable is available : 2500K-3000k / 2700K-5000K
 - Customized funcation is available
- 所有配件均由KWT 自己设计、自己开模生产
 - 型材灯体，散热更好
 - 根据应用场所可选择不同长度和功率
 - 嵌入式安装，有边和无边供选择
 - 固定和转动灯体可选
 - 欧司朗3步光源，确保色容差真正能够小于3
 - 高显色指数，标准产品均大于90Ra
 - 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
 - 调色温可选：2500K-3000k / 2700K-5000K
 - 接受定制

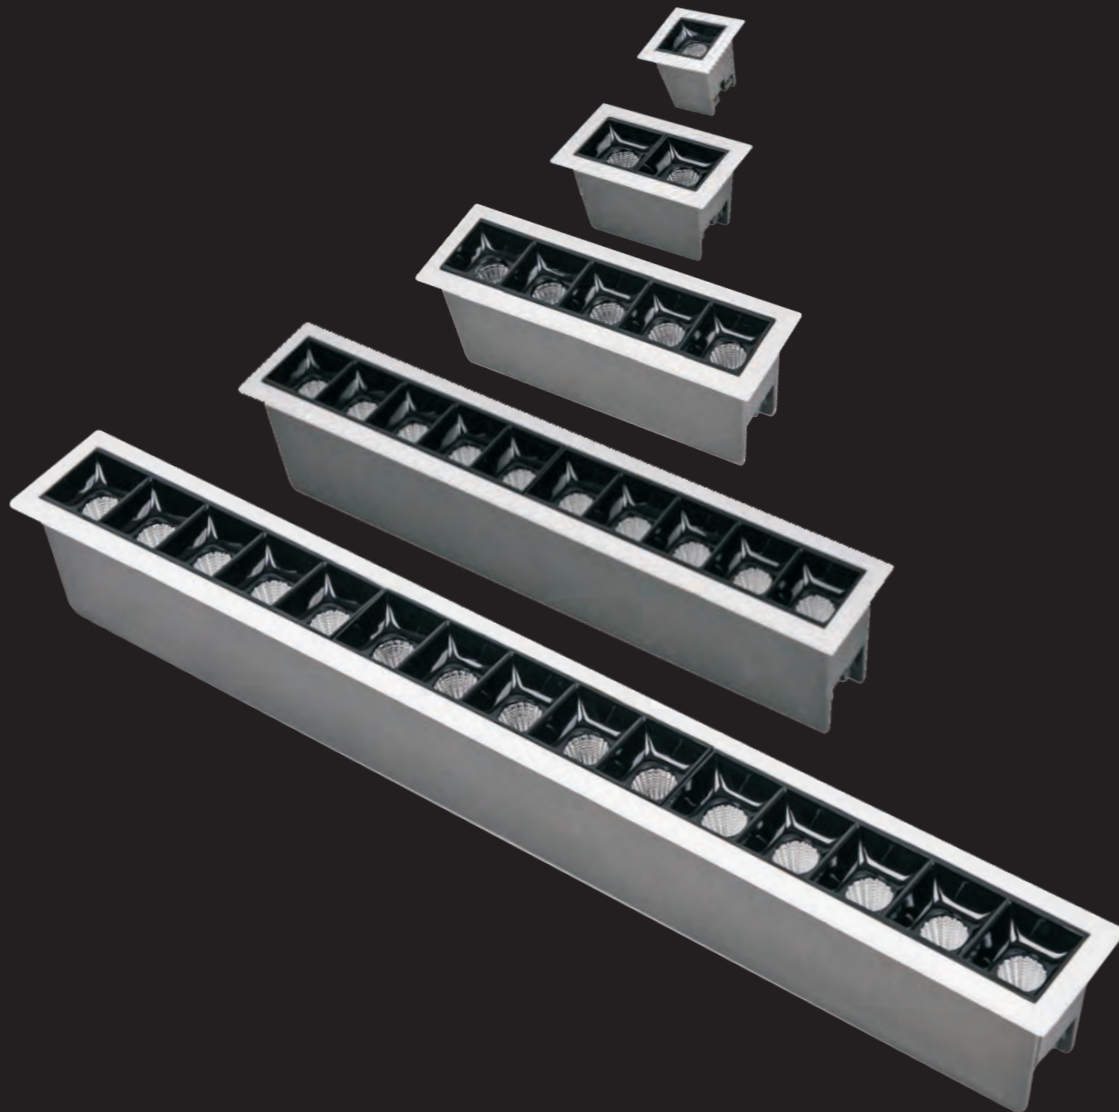

Dimensions 产品尺寸 (Unit: mm)


LTD0102
1LED/2W

37x37mm




LTD0104
2LED/4W

68x37mm




LTD0510
5LED/10W

140x37mm

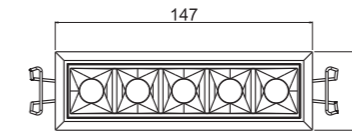


LTD1020
10LED/20W

273x37mm

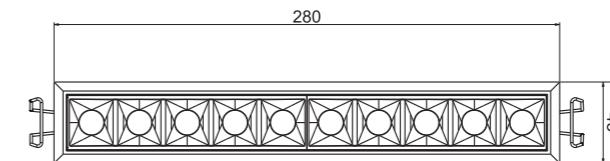


LTD1530
15LED/30W

405x37mm

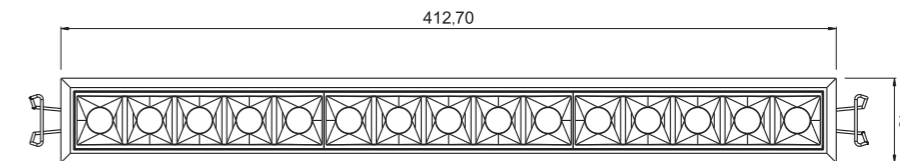

Linear LED Light

Photometric Diagram 光度分布图

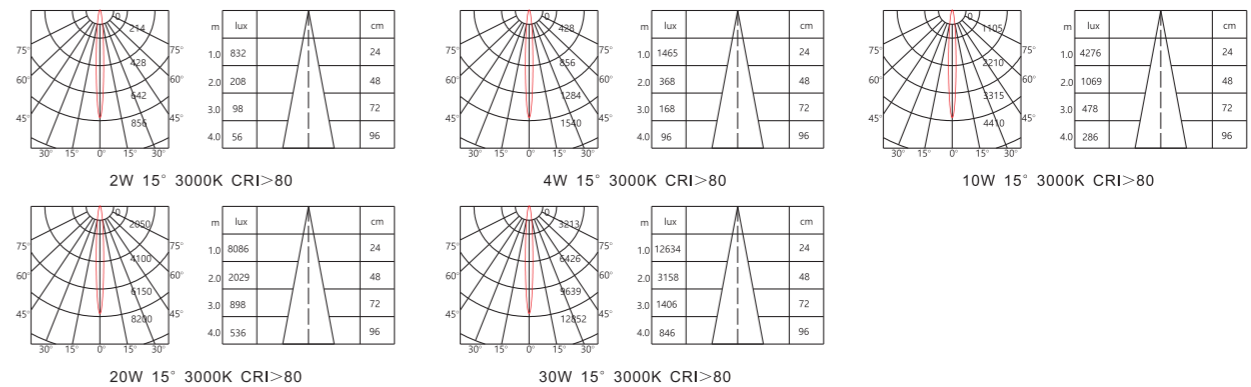


Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
LTD0102-930XY LTD0102-940XY LTD0102-960XY	2W	50mA	3000K 4000K 6000K	133lm 145lm 141lm	>90	≥0.95
LTD0204-930XY LTD0204-940XY LTD0204-960XY	4W	100mA	3000K 4000K 6000K	256lm 273lm 268lm	>90	≥0.95
LTD0510-930XY LTD0510-940XY LTD0510-960XY	10W	250mA	3000K 4000K 6000K	679lm 726lm 708lm	>90	≥0.95
LTD1020-930XY LTD1020-940XY LTD1020-960XY	20W	480mA	3000K 4000K 6000K	1452lm 1553lm 1536lm	>90	≥0.95
LTD1530-930XY LTD1530-940XY LTD1530-960XY	30W	950mA	3000K 4000K 6000K	2927lm 3131lm 3018lm	>90	≥0.95


Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

LTC Series

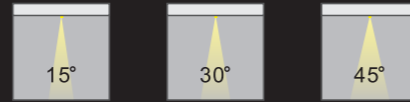

Advantages 产品优势


- All of parts designed and produced by KWT own tools
 - Aluminium profile heatsink to meet best heat dissipation
 - Different Length and power to meet project request
 - Recessed type with trim and trimless
 - Gimbal and fixed type for option
 - Osram LED with step 3 to ensure the SDCM <3
 - CRI>90Ra For standard production line .
 - Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
 - CCT dimmable is available : 2500K-3000k / 2700K-5000K
 - Customized funcation is available
- 所有配件均由KWT 自己设计、自己开模生产
 - 型材灯体，散热更好
 - 根据应用场所可选择不同长度和功率
 - 嵌入式安装，有边和无边供选择
 - 固定和转动灯体可选
 - 欧司朗3步光源，确保色容差真正能够小于3
 - 高显色指数，标准产品均大于90Ra
 - 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
 - 调色温可选：2500K-3000k / 2700K-5000K
 - 接受定制

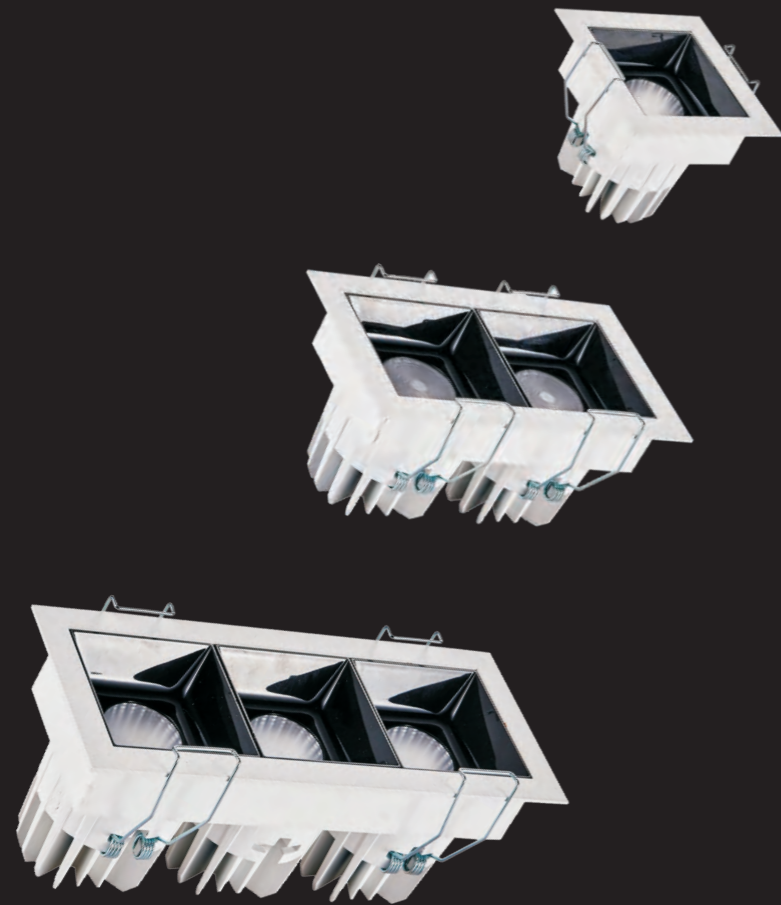

Dimensions 产品尺寸 (Unit: mm)


LTC0110
1LED/10W

80x80mm





LTC0220
2LED/20W

148x80mm

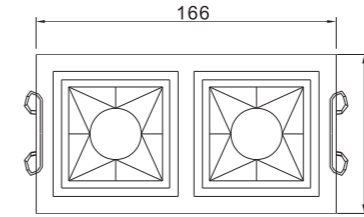


LTC0330
3LED/30W


218x80mm

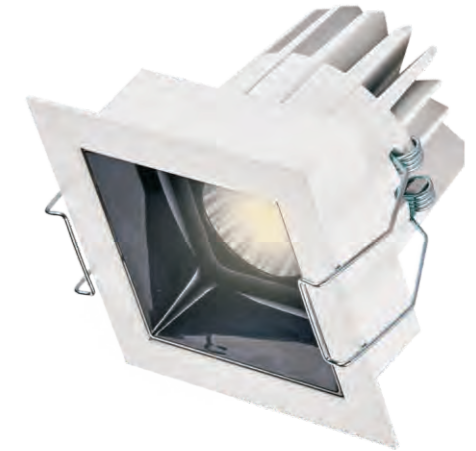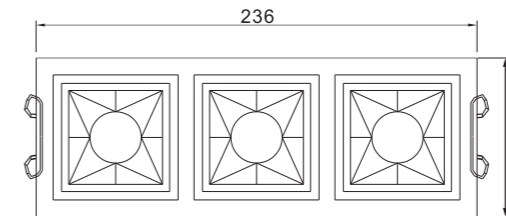


Photometric Diagram 光度分布图

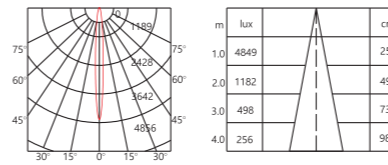

10W 15° 3000K CRI>80

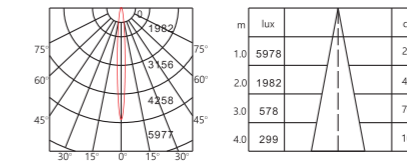

20W 15° 3000K CRI>80

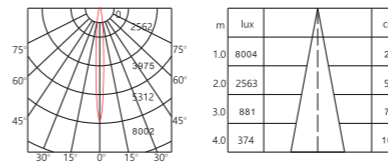


30W 15° 3000K CRI>80

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
LTC0110-930XY	10W	250mA	3000K	805lm	>90	≥0.95
LTC0110-940XY			4000K	911lm		
LTC0110-960XY			6000K	878lm		
LTC0220-930XY	20W	480mA	3000K	1543lm	>90	≥0.95
LTC0220-940XY			4000K	1786lm		
LTC0220-960XY			6000K	1730lm		
LTC0330-930XY	30W	700mA	3000K	2416lm	>90	≥0.95
LTC0330-940XY			4000K	2769lm		
LTC0330-960XY			6000K	2703lm		

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

LTG Series

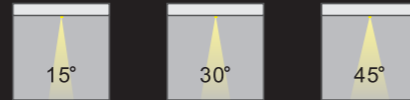

Advantages 产品优势


- All of parts designed and produced by KWT own tools
 - Aluminium profile heatsink to meet best heat dissipation
 - Different Length and power to meet project request
 - Recessed type with trim and trimless
 - Gimbal and fixed type for option
 - Osram LED with step 3 to ensure the SDCM <3
 - CRI>90Ra For standard production line .
 - Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
 - CCT dimmable is available : 2500K-3000k / 2700K-5000K
 - Customized funcation is available
- 所有配件均由KWT 自己设计、自己开模生产
 - 型材灯体，散热更好
 - 根据应用场所可选择不同长度和功率
 - 嵌入式安装，有边和无边供选择
 - 固定和转动灯体可选
 - 欧司朗3步光源，确保色容差真正能够小于3
 - 高显色指数，标准产品均大于90Ra
 - 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
 - 调色温可选：2500K-3000k / 2700K-5000K
 - 接受定制



Dimensions 产品尺寸 (Unit: mm)


LTG1020
10LED/20W

295x90mm

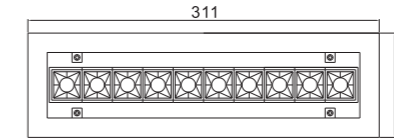


LTG2040
20LED/40W

425x90mm

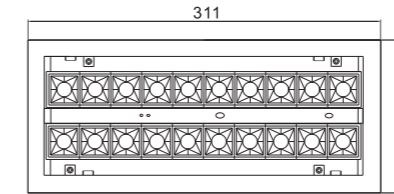


LTG1530
15LED/30W

295x90mm

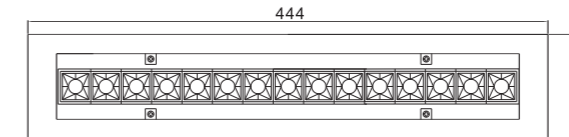


LTG3060
30LED/60W

425x90mm

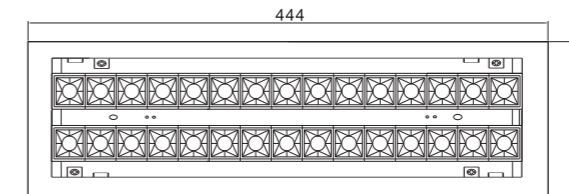

Linear LED Light

Photometric Diagram 光度分布图

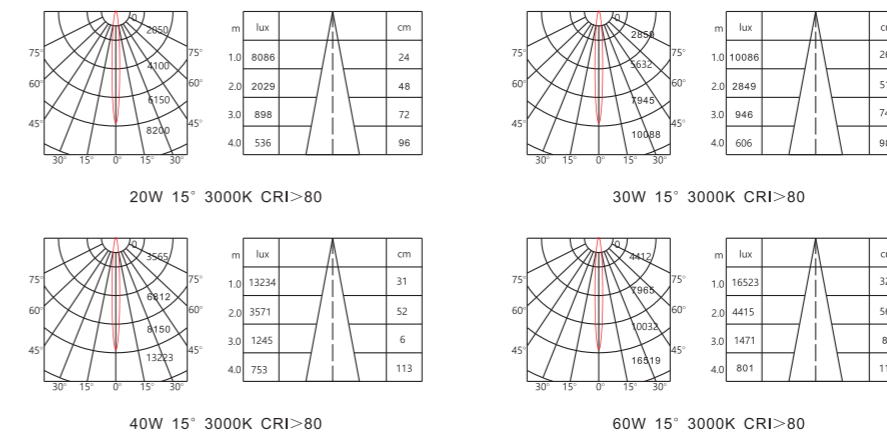


Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
LTG1020-930XY LTG1020-940XY LTG1020-960XY	20W	480mA	3000K 4000K 6000K	1301lm 1464lm 1445lm	>90	≥0.95
LTG1530-930XY LTG1530-940XY LTG1530-960XY	30W	700mA	3000K 4000K 6000K	1976lm 2298lm 2123lm	>90	≥0.95
LTG2040-930XY LTG2040-940XY LTG2040-960XY	40W	950mA	3000K 4000K 6000K	2589lm 2941lm 2886lm	>90	≥0.95
LTG3060-930XY LTG3060-940XY LTG3060-960XY	60W	1420mA	3000K 4000K 6000K	3903lm 4332lm 4158lm	>90	≥0.95


Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)

LTR Series

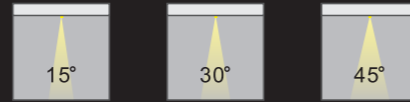

Advantages 产品优势


- All of parts designed and produced by KWT own tools
 - Aluminium profile heatsink to meet best heat dissipation
 - Different Length and power to meet project request
 - Recessed type with trim and trimless
 - Gimbal and fixed type for option
 - Osram LED with step 3 to ensure the SDCM <3
 - CRI>90Ra For standard production line .
 - Dimmable type : Triac/0-10V/Dali/Wi-Fi/Blue Tooth
 - CCT dimmable is available : 2500K-3000k / 2700K-5000K
 - Customized funcation is available
- 所有配件均由KWT 自己设计、自己开模生产
 - 型材灯体，散热更好
 - 根据应用场所可选择不同长度和功率
 - 嵌入式安装，有边和无边供选择
 - 固定和转动灯体可选
 - 欧司朗3步光源，确保色容差真正能够小于3
 - 高显色指数，标准产品均大于90Ra
 - 各种调光可选：Triac/0-10V/Dali/Wi-Fi/Blue Tooth
 - 调色温可选：2500K-3000k / 2700K-5000K
 - 接受定制

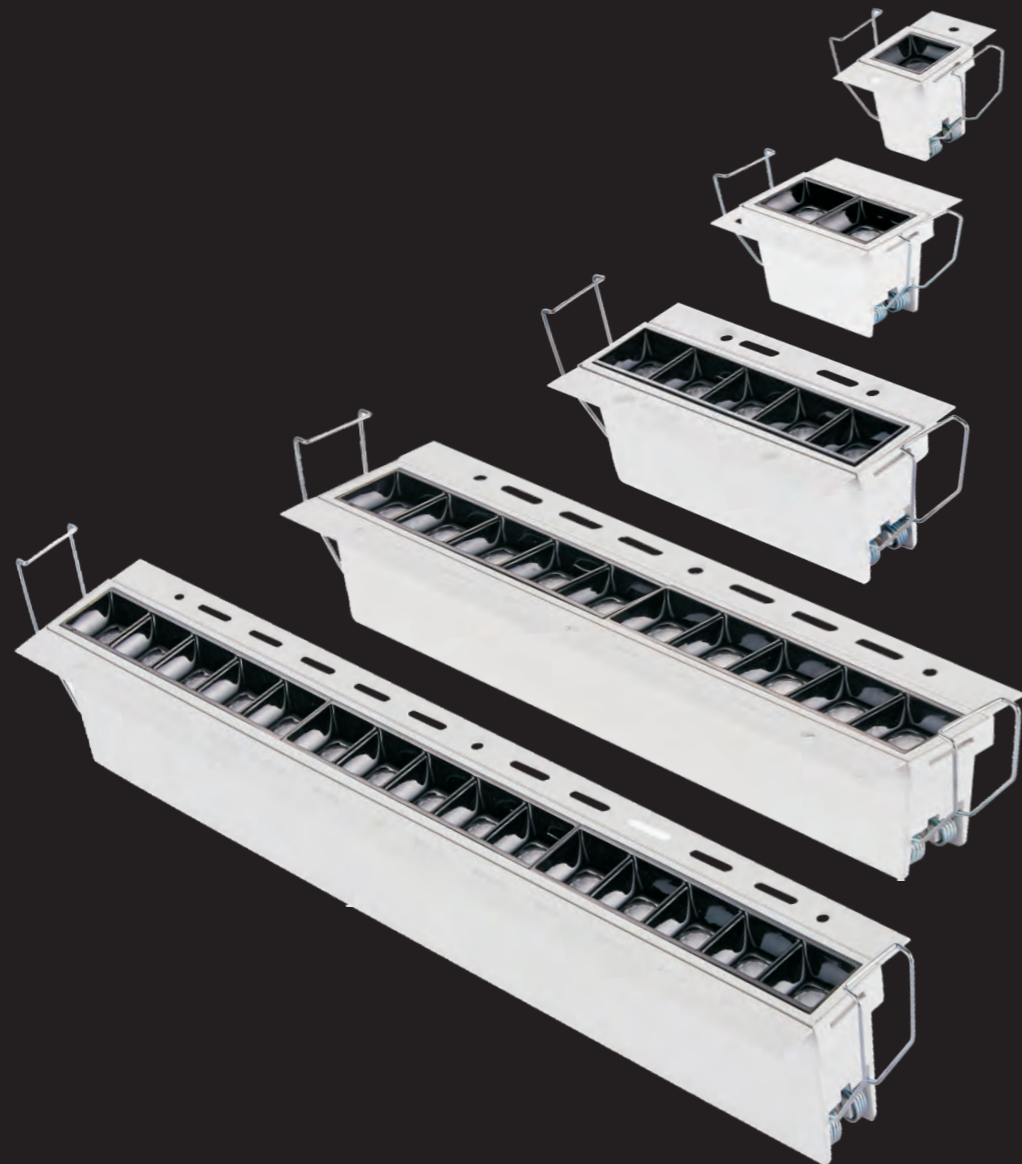

Dimensions 产品尺寸 (Unit: mm)


LTR0102
1LED/2W

42x41mm




LTR0104
2LED/4W

72x41mm




LTR0510
5LED/10W

145x41mm

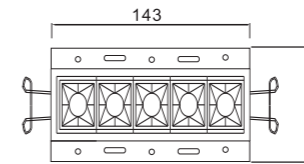


LTR1020
10LED/20W

277x41mm

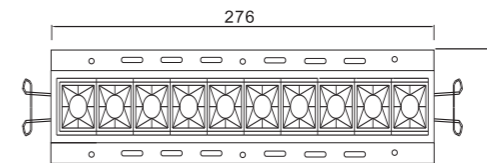


LTR1530
15LED/30W

410x41mm

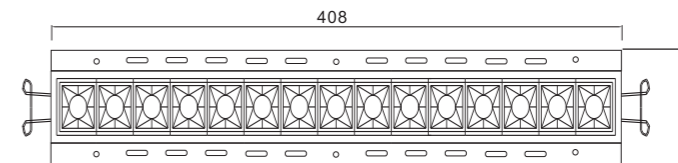

Photometric Diagram 光度分布图

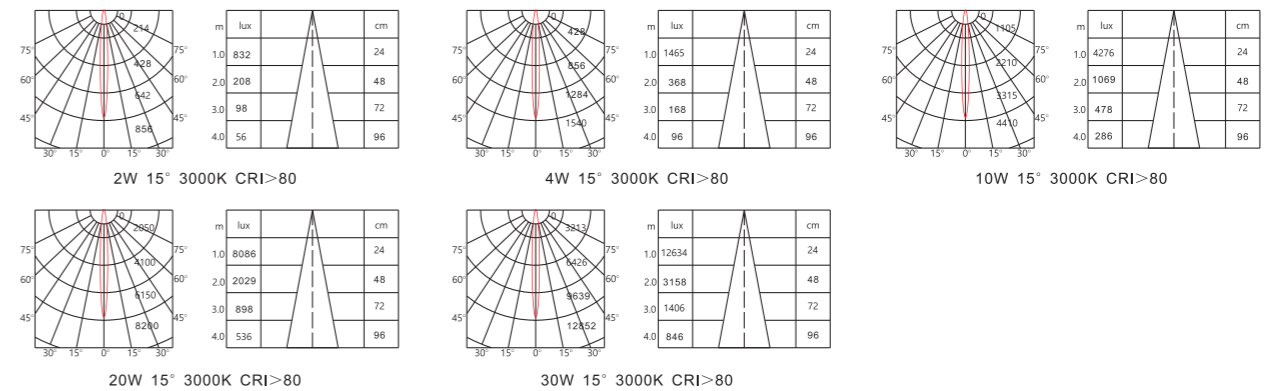

Order Information 产品信息

Mode 型号	Power 功率	LED Current 电流	CCT 色温	Luminous Flux 光通量	CRI 显指	PFC 功率因数
LTR0102-930XY LTR0102-940XY LTR0102-960XY	2W	50mA	3000K 4000K 6000K	132lm 148lm 141lm	>90	≥0.95
LTR0204-930XY LTR0204-940XY LTR0204-960XY	4W	100mA	3000K 4000K 6000K	260lm 285lm 279lm	>90	≥0.95
LTR0510-930XY LTR0510-940XY LTR0510-960XY	10W	250mA	3000K 4000K 6000K	680lm 735lm 730lm	>90	≥0.95
LTR1020-930XY LTR1020-940XY LTR1020-960XY	20W	480mA	3000K 4000K 6000K	1301lm 1506lm 1445lm	>90	≥0.95
LTR1530-930XY LTR1530-940XY LTR1530-960XY	30W	700mA	3000K 4000K 6000K	2011lm 2368lm 2233lm	>90	≥0.95

Remark 备注: X=F(ON-OFF) X=A(0-10V Dim) X=T(Triac Dim) X=D(Dali Dim) X=N(Without Driver) Y=B(Black) Y=W(White)




Product 产品	Image 图片	Length 长度	Wattage 瓦数	CCT 色温	Installation 安装方式	Profile Color 外观颜色
L3875		600mm	20W	3000K-6000K	Suspended	Silver
		1200mm	40W			Black
		1800mm	50W			White
L5575		600mm	20W	3000K-6000K	Suspended	Silver
		1200mm	40W			Black
		1800mm	50W			White
L7080		600mm	20W	3000K-6000K	Suspended	Silver
		1200mm	40W			Black
		1800mm	50W			White
LD50		600mm	20W	3000K-6000K	Suspended	Silver
		1200mm	40W			Black
		1800mm	50W			White
LD60		600mm	20W	3000K-6000K	Suspended	Silver
		1200mm	40W			Black
		1800mm	50W			White
LE16640		600mm	30W	3000K-6000K	Recessed	Silver
		1200mm	50W			Black
		1800mm	60W			White
LE21640		600mm	30W	3000K-6000K	Recessed	Silver
		1200mm	50W			Black
		1800mm	60W			White
LM4084		600mm	30W	3000K-6000K	Suspended	Silver
		1200mm	50W			Black
		1800mm	60W			White

L3875 Linear Light Series 线型灯系列




- Connect freely,easy fixing
 - 5 different types of corner connectors application
 - End caps assembled by mechanical screws and magnet structure
 - Ladder type structure design,convenient for disassemble
 - Build-in 0-10V dimming function
 - UGR<19
- 自由连接，安装简便
 - 5种不同的转角连接方式
 - 尾盖由螺丝和磁吸结构组成
 - 梯状结构，方便拆卸
 - 内置0-10V调光
 - UGR小于19

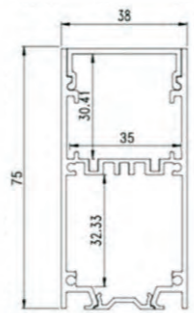

L5575 Linear Light Series 线型灯系列




- Connect freely,easy fixing
 - 5 different types of corner connectors application
 - End caps assembled by mechanical screws and magnet structure
 - Ladder type structure design,convenient for disassemble
 - Build-in 0-10V dimming function
 - UGR<19
- 自由连接，安装简便
 - 5种不同的转角连接方式
 - 尾盖由螺丝和磁吸结构组成
 - 梯状结构，方便拆卸
 - 内置0-10V调光
 - UGR小于19

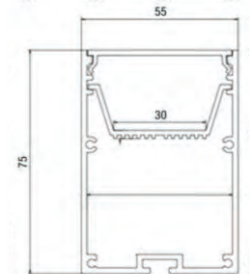

L7080 Linear Light Series 线型灯系列




- Connect freely,easy fixing
 - 5 different types of corner connectors application
 - End caps assembled by mechanical screws and magnet structure
 - Ladder type structure design,convenient for disassemble
 - Build-in 0-10V dimming function
 - UGR<19
- 自由连接，安装简便
 - 5种不同的转角连接方式
 - 尾盖由螺丝和磁吸结构组成
 - 梯状结构，方便拆卸
 - 内置0-10V调光
 - UGR小于19

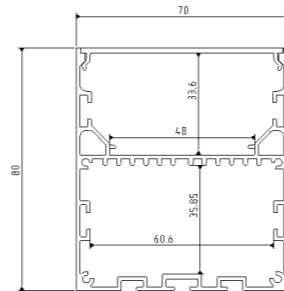

LD50 Linear Light Series 线型灯系列




- Connect freely,easy fixing
 - 5 different types of corner connectors application
 - End caps assembled by mechanical screws and magnet structure
 - Ladder type structure design,convenient for disassemble
 - Build-in 0-10V dimming function
 - UGR<19
- 自由连接，安装简便
 - 5种不同的转角连接方式
 - 尾盖由螺丝和磁吸结构组成
 - 梯状结构，方便拆卸
 - 内置0-10V调光
 - UGR小于19

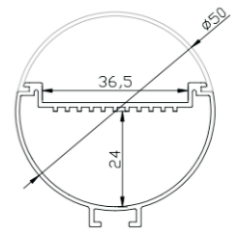

LD60 Linear Light Series 线型灯系列




- Connect freely,easy fixing
- 5 different types of corner connectors application
- End caps assembled by mechanical screws and magnet structure
- Ladder type structure design,convenient for disassemble
- Build-in 0-10V dimming function
- UGR<19
- 自由连接，安装简便
- 5种不同的转角连接方式
- 尾盖由螺丝和磁吸结构组成
- 梯状结构，方便拆卸
- 内置0-10V调光
- UGR小于19

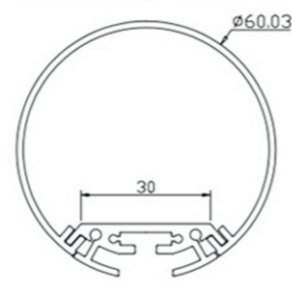

LE16640 Linear Light Series 线型灯系列




- Connect freely,easy fixing
- 5 different types of corner connectors application
- End caps assembled by mechanical screws and magnet structure
- Ladder type structure design,convenient for disassemble
- Build-in 0-10V dimming function
- UGR<19
- 自由连接，安装简便
- 5种不同的转角连接方式
- 尾盖由螺丝和磁吸结构组成
- 梯状结构，方便拆卸
- 内置0-10V调光
- UGR小于19

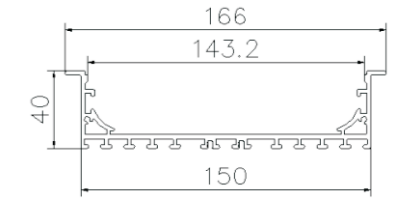

LE21640 Linear Light Series 线型灯系列



- Connect freely,easy fixing
- 5 different types of corner connectors application
- End caps assembled by mechanical screws and magnet structure
- Ladder type structure design,convenient for disassemble
- Build-in 0-10V dimming function
- UGR<19
- 自由连接，安装简便
- 5种不同的转角连接方式
- 尾盖由螺丝和磁吸结构组成
- 梯状结构，方便拆卸
- 内置0-10V调光
- UGR小于19

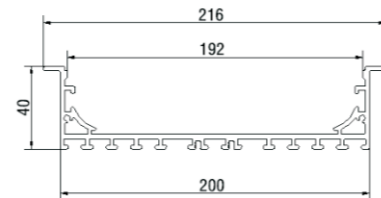

LM4084 Linear Light Series 线型灯系列



- Connect freely,easy fixing
- 5 different types of corner connectors application
- End caps assembled by mechanical screws and magnet structure
- Ladder type structure design,convenient for disassemble
- Build-in 0-10V dimming function
- UGR<19
- 自由连接，安装简便
- 5种不同的转角连接方式
- 尾盖由螺丝和磁吸结构组成
- 梯状结构，方便拆卸
- 内置0-10V调光
- UGR小于19

